
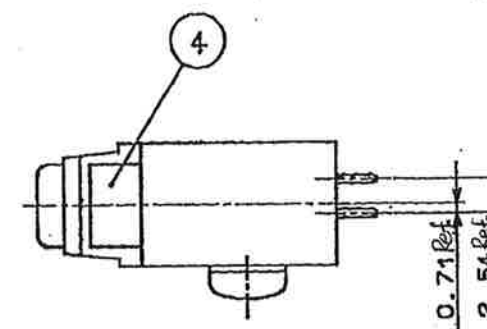
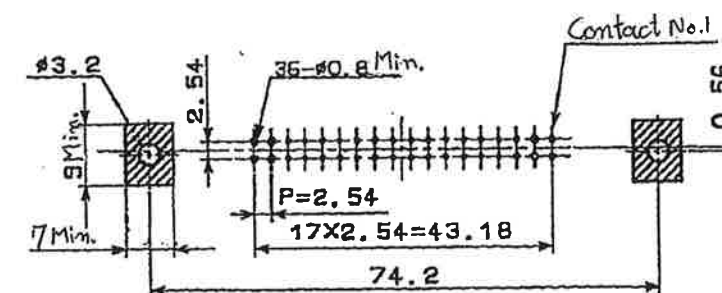

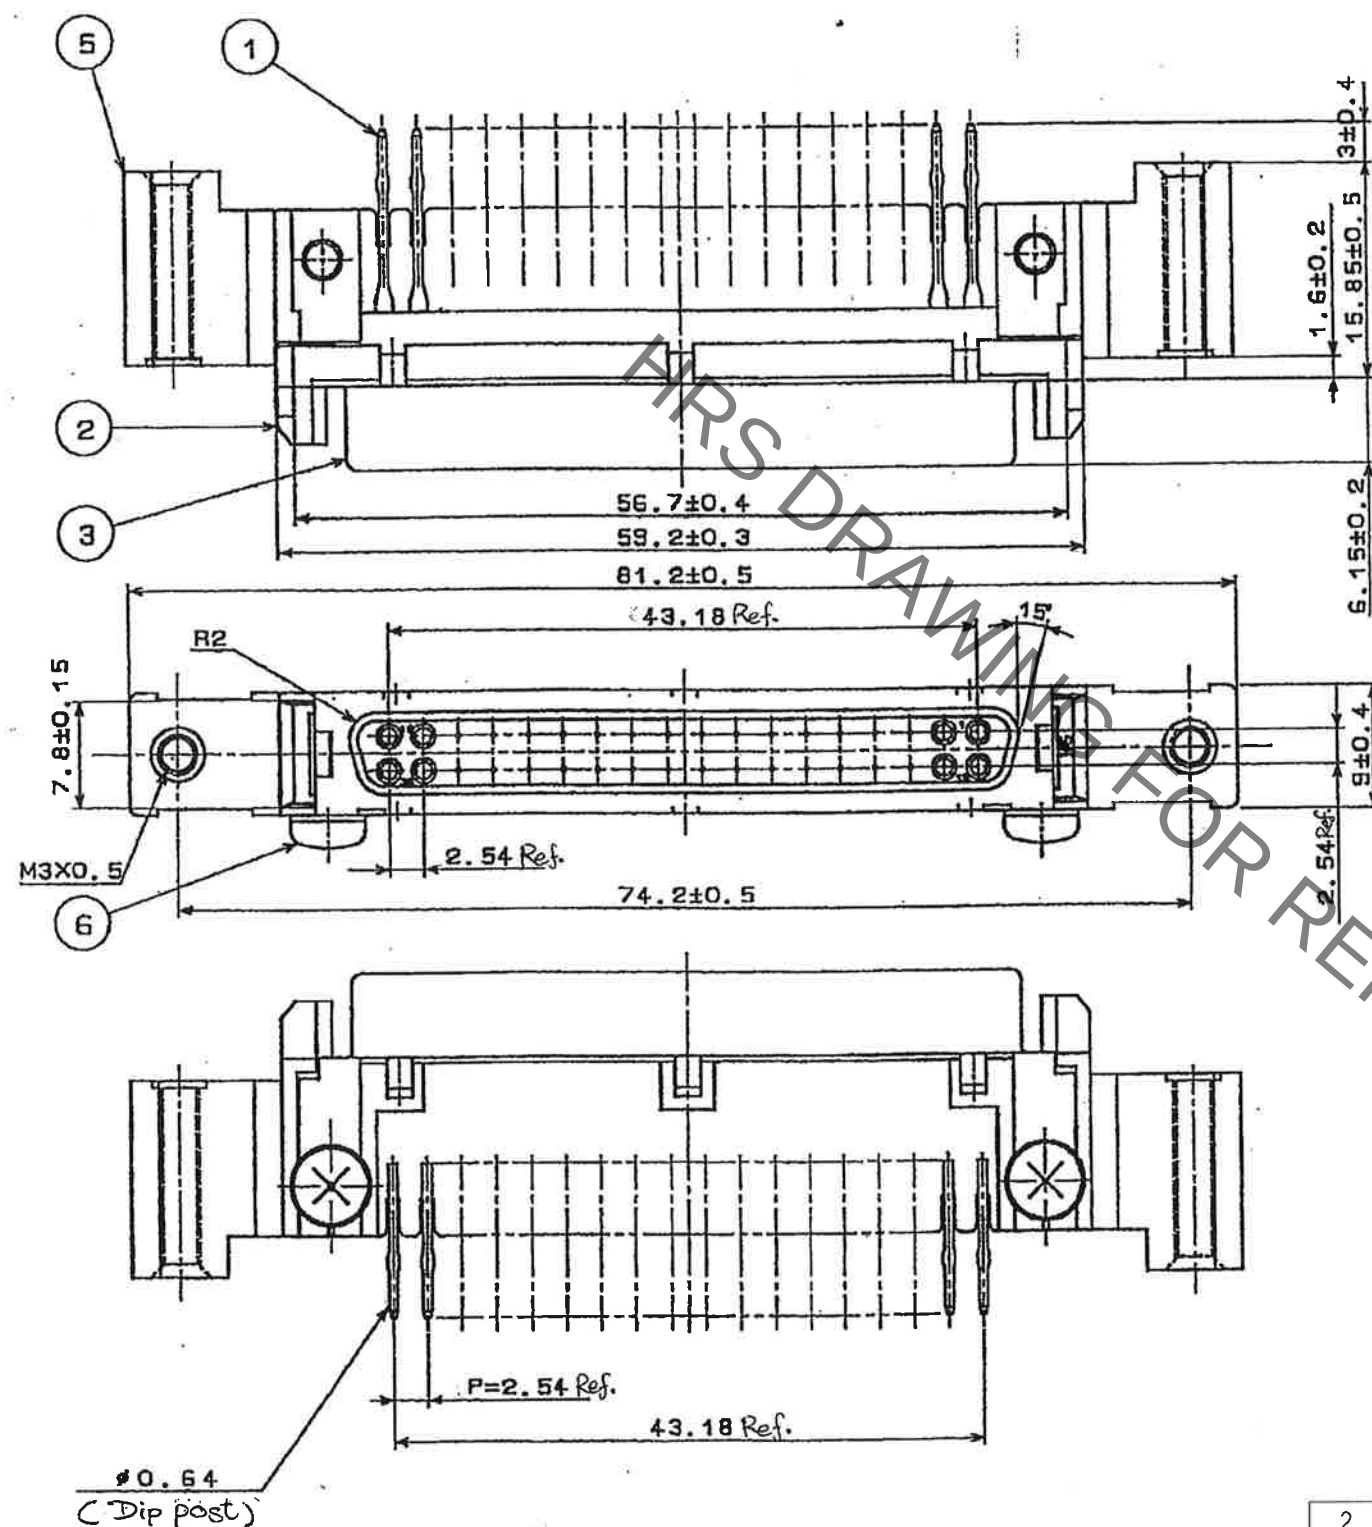




Note

1. Thickness of PCB shall be 1.6 mm.
2. Hatching area  shall be pattern prohibited area.

			6		Steel	Nickel plating 3μm min				
2		PBT	5		ZDC2	Over:Nickel plating 2μm min Under:Copper plating 1μm min				
1		Phosphor bronze	4		Phosphor bronze	Nickel plating 0.8μm min				
		Black. UL94V-0	3		Steel	Over:Nickel plating 3μm min Under:Copper plating 6μm min				
NO.		MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm			SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED • TU. TANIGUCHI 20200729		DRAWING NO.		EDC-025453-70-00				
		CHECKED • TU. TANIGUCHI 20200728		PART NO.		DN20B-36S(70)				
		DESIGNED • MO. SHIMOYAMA 20200728		CODE NO.		CL0225-0047-7-70				
		DRAWN • MO. SHIMOYAMA 20200728				 1				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DN20B-36S\(70\)](#)