
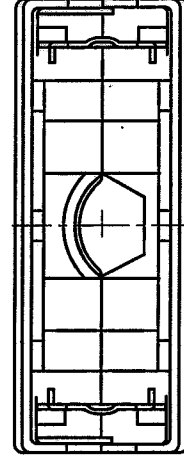
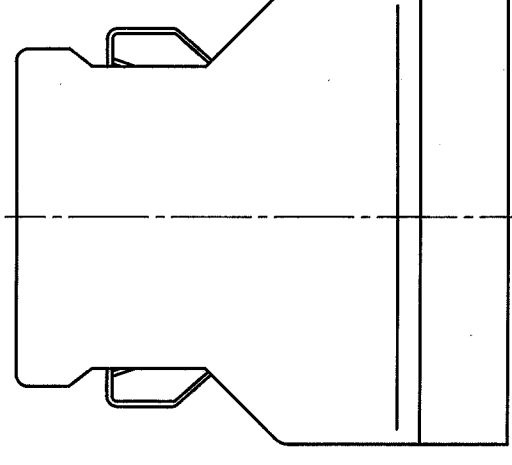
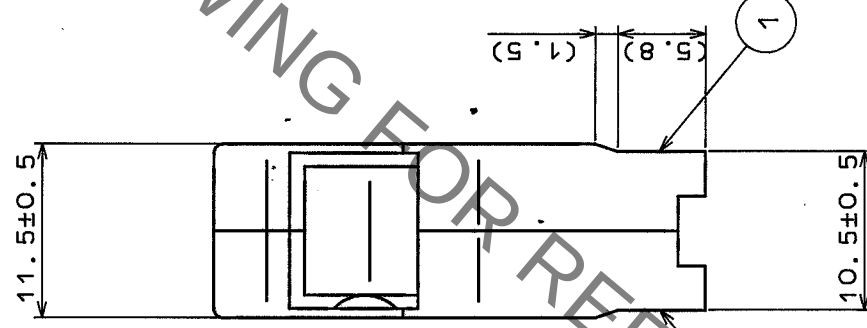
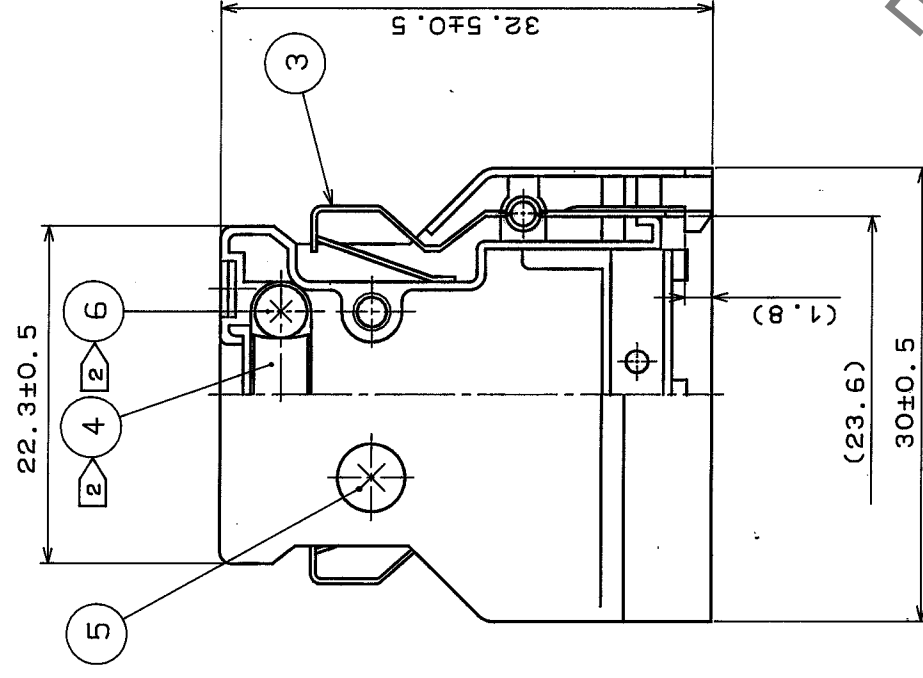


2 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT		REVISIONS	BY	CHKD	DATE	COUNT	REVISIONS	BY	CHKD	DATE
Δ	1	RE-E-10106	Y.S.Y.E		04.17.14	Δ				
Δ						Δ				
Δ						Δ				

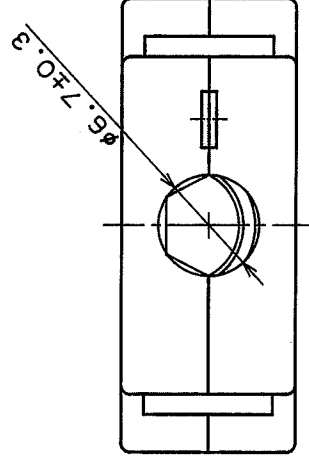

Note 1. Dimension in () is for reference.
2 Drawing No. 4 and 6 are accessories.

3	Stainless steel		6	Steel	Nickel plated
2	Zinc alloy diecast	Silver baking finish	5	Brass	Nickel plated
1	Zinc alloy diecast	Silver baking finish	4	Stainless steel	
No.	MATERIAL	FINISH, REMARKS	No.	MATERIAL	FINISH, REMARKS
APPROVED	M. Kawamura 9.28.87		GENERAL DIMENSION TOLERANCE		ISSUED BY
REVIEWED			6 or less	±0.3	HRS HIROSE ELECTRIC CO., LTD.
CHECKED	S. Hikuta	9.28.87	over 6 to 18	±0.5	
DESIGNED	M. Nakamura	9.26.87	over 18 to 50	±0.7	
DRAWN	A. Sato	9.26.87	over 50 to 125	±1	
DRAWING NO. ADC3-27598-		UNITS mm	SCALE 2:1	PART NO. DX-20-CV	CODE NO. CL230-0036-6-

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DX-20-CV](#)