



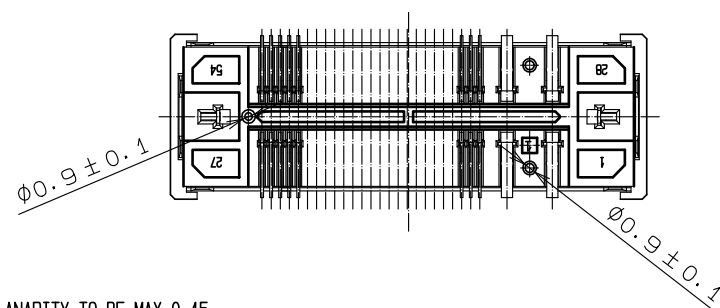

8 100mm MIN. OF TURNING-RADIUS IS REQUIRED FOR THE ROTATE-AND-MATE
PC BODY TO DOCKING STATION.

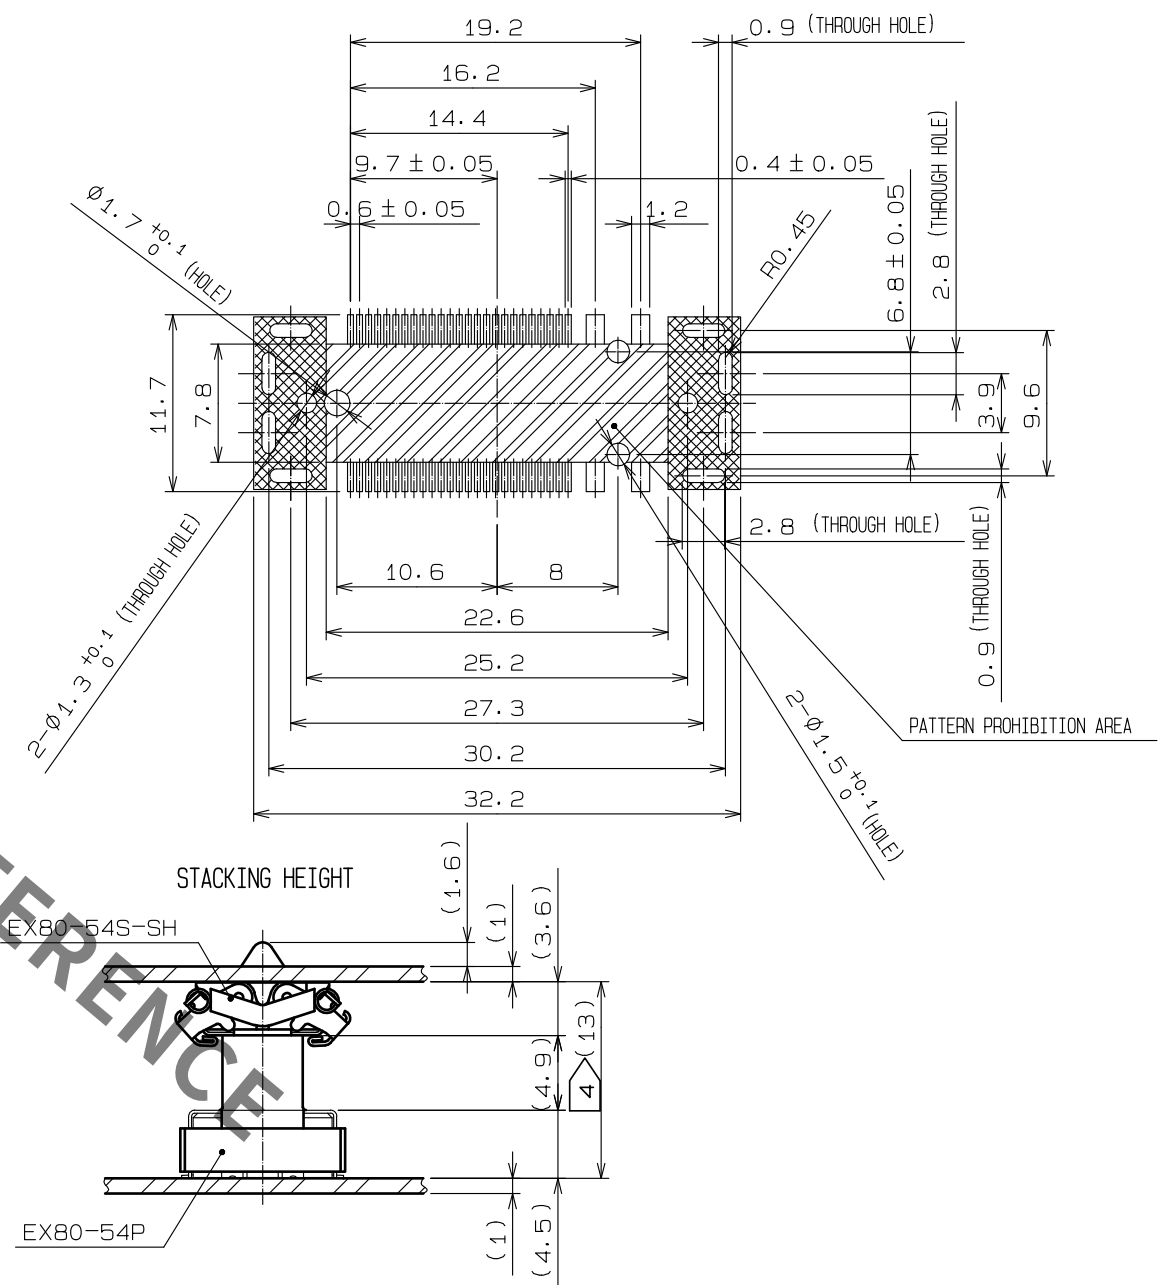


3	PHOSPHOR BRONZE	SELECTIVE NICKEL PLATING+ TIN-COPPER PLATING	6	PICK & PLACE TAPE	
2	COPPER ALLOY	SELECTIVE GOLD PLATING+ TIN-COPPER PLATING	5	STAINLESS STEEL	NICKEL PLATING+ TIN-COPPER PLATING
1	COPPER ALLOY	SELECTIVE GOLD PLATING+ TIN-COPPER PLATING	4	LCP	UL94V-0. BLACK
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE

 HIROSE ELECTRIC CO., LTD.	APPROVED : NM. NISHIMATSU	15. 10. 27	DRAWING NO.	EDC-124904-30-00	
	CHECKED : KN. ICHIKAWA	15. 10. 27	PART NO.	EX80-54P-SH(30)	
	DESIGNED : TS. ITO	15. 10. 27	CODE NO.	CL232-0614-3-30	
	DRAWN : AK. AKIYAMA	15. 10. 27	 		

EX80-54P-SH(01) PACKAGING FIGURE

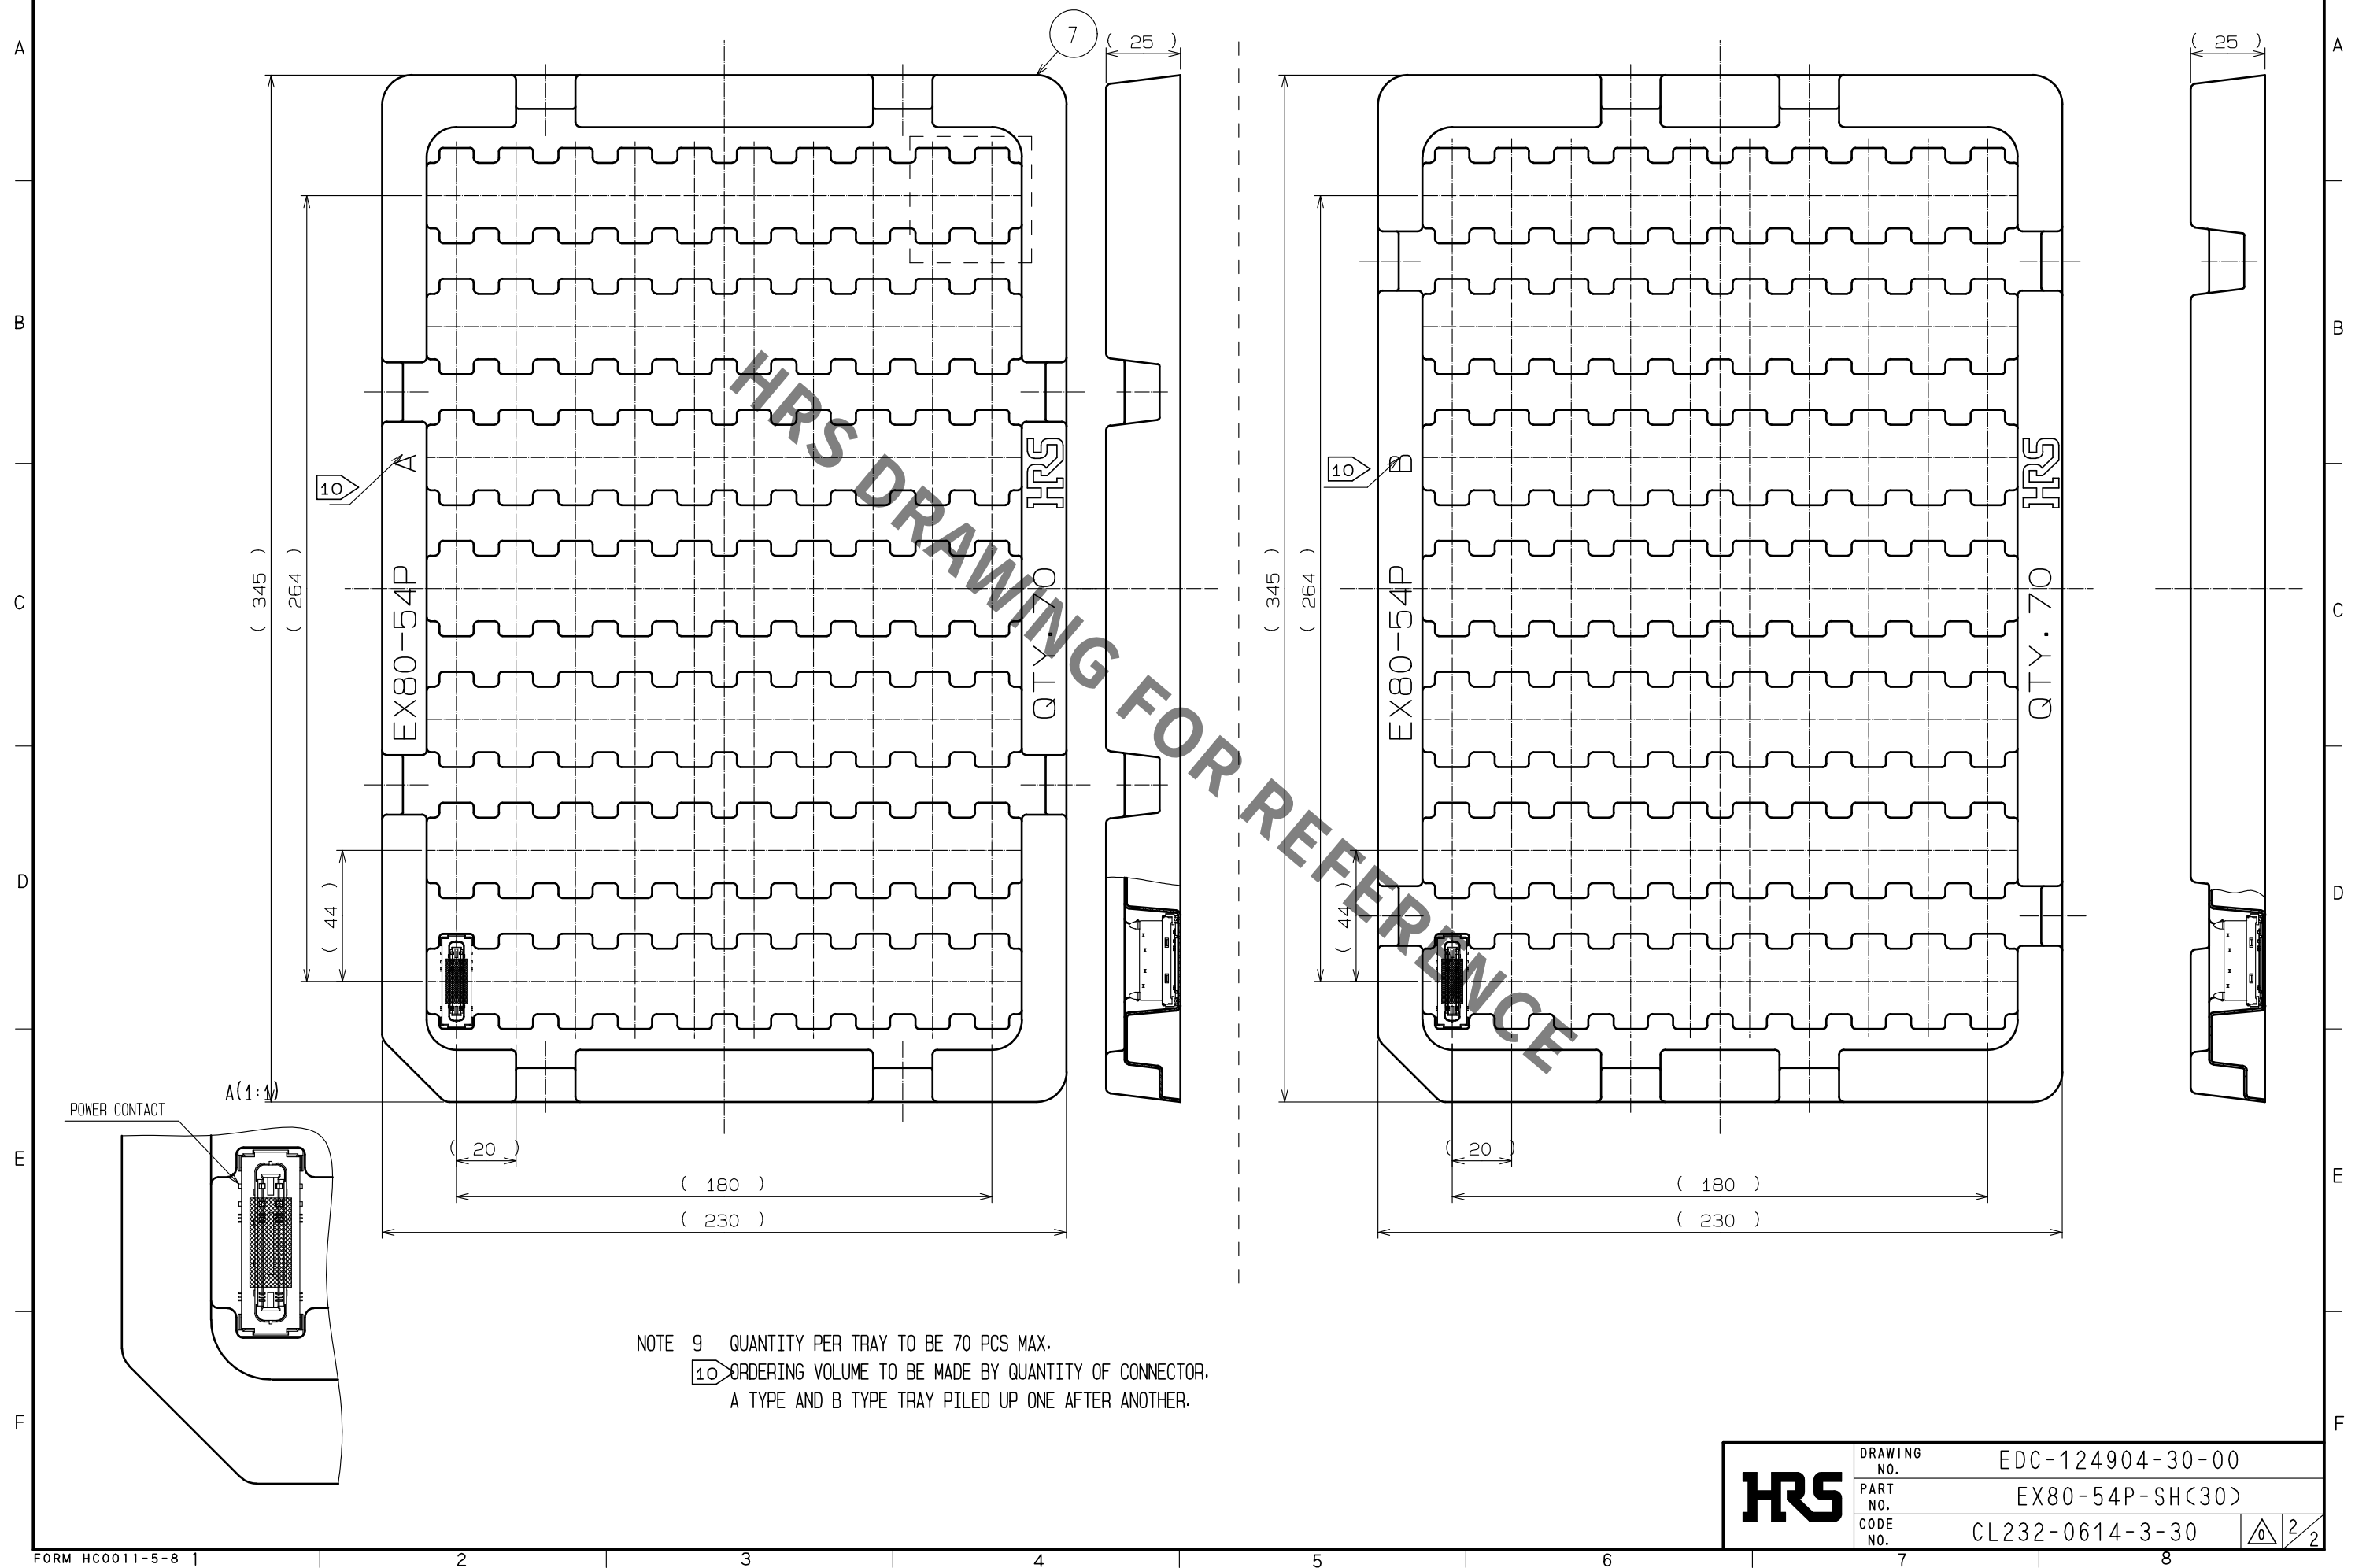

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[EX80-54P-SH\(30\)](#)