Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

HRS DRAWING FOR REFERENCE

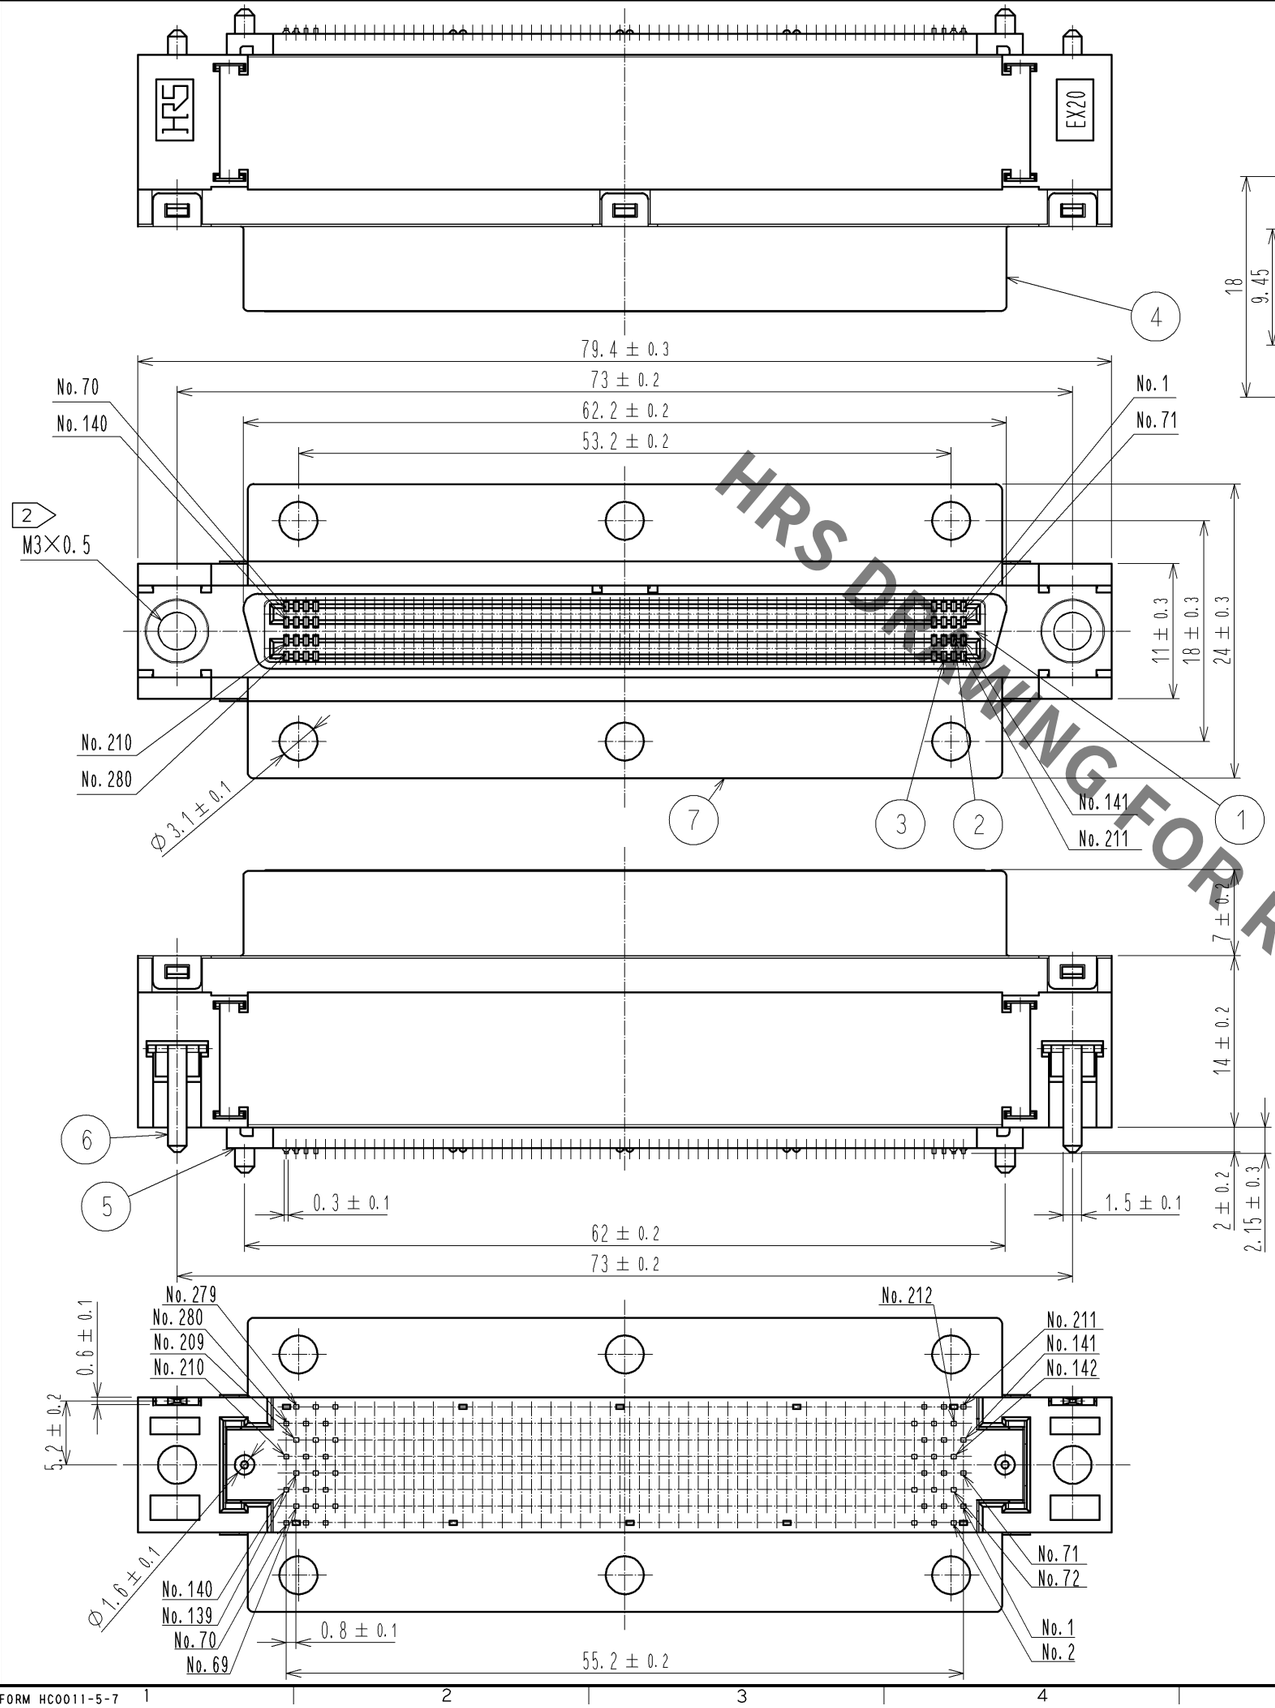

PCB LAYOUT FOR REFERENCE

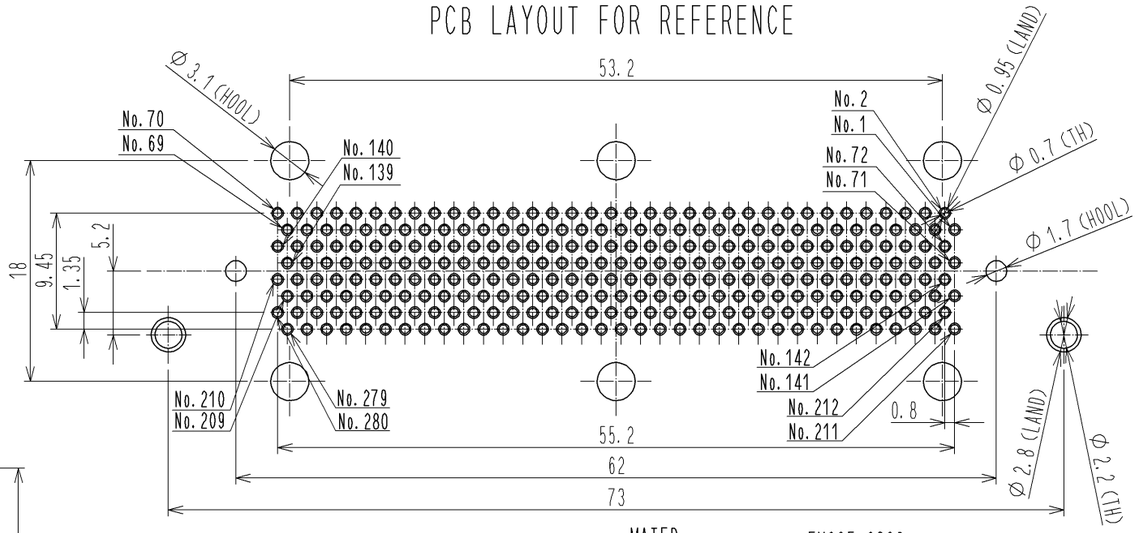

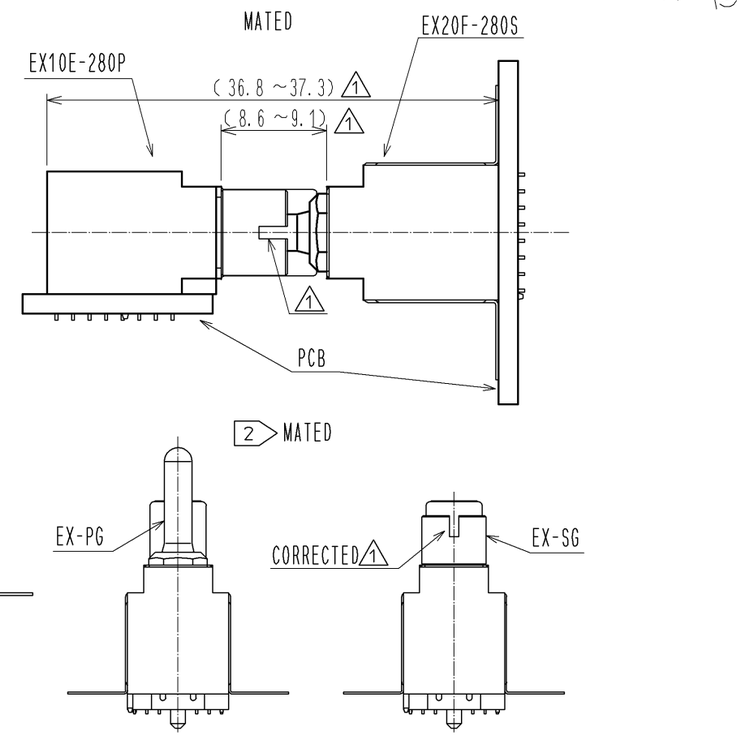

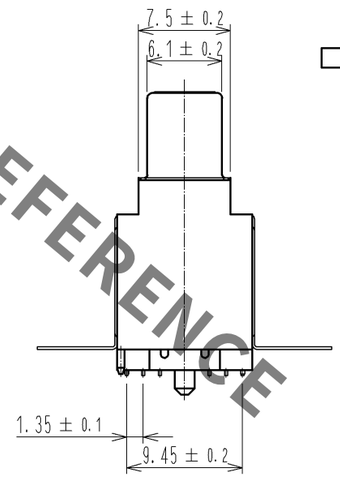

NOTE 1 THIS PRODUCT SHALL BE MATED WITH A 'EX10E-280P'.
2 'EX-PG' OR 'EX-SG' CAN BE ATTACHED TO THE INDICATED THREADED PORTION.

NO.	MATERIAL	FINISH , REMARKS
3	COPPER ALLOY	CONTACT:GOLD 0.5μm MIN. LEAD:GOLD 0.03μm MIN. UNDER:NICKEL 1μm MIN.
2	COPPER ALLOY	CONTACT:GOLD 0.5μm MIN. LEAD:GOLD 0.03μm MIN. UNDER:NICKEL 1μm MIN.
1	LCP	NATURAL UL94V-0

NO.	MATERIAL	FINISH , REMARKS
7	STAINLESS STEEL	NICKEL 1μm MIN.
6	BRASS	NICKEL 2μm MIN.
5	LCP	NATURAL UL94V-0
4	STAINLESS STEEL	NICKEL 1μm MIN.

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	1	4	DIS-E-004063	MO. SHIMOYAMA	KN. ICHIKAWA	11.12.16

HIROSE ELECTRIC CO., LTD.

APPROVED	AO. SUZUKI	11.05.19
CHECKED	KN. ICHIKAWA	11.05.19
DESIGNED	MO. SHIMOYAMA	11.05.19
DRAWN	MO. SHIMOYAMA	11.05.19

DRAWING NO.	EDC3-127114-00
PART NO.	EX20F-280S
CODE NO.	CL232-0626-2-00

1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Hirose Electric:
EX20F-280S