


Dec.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

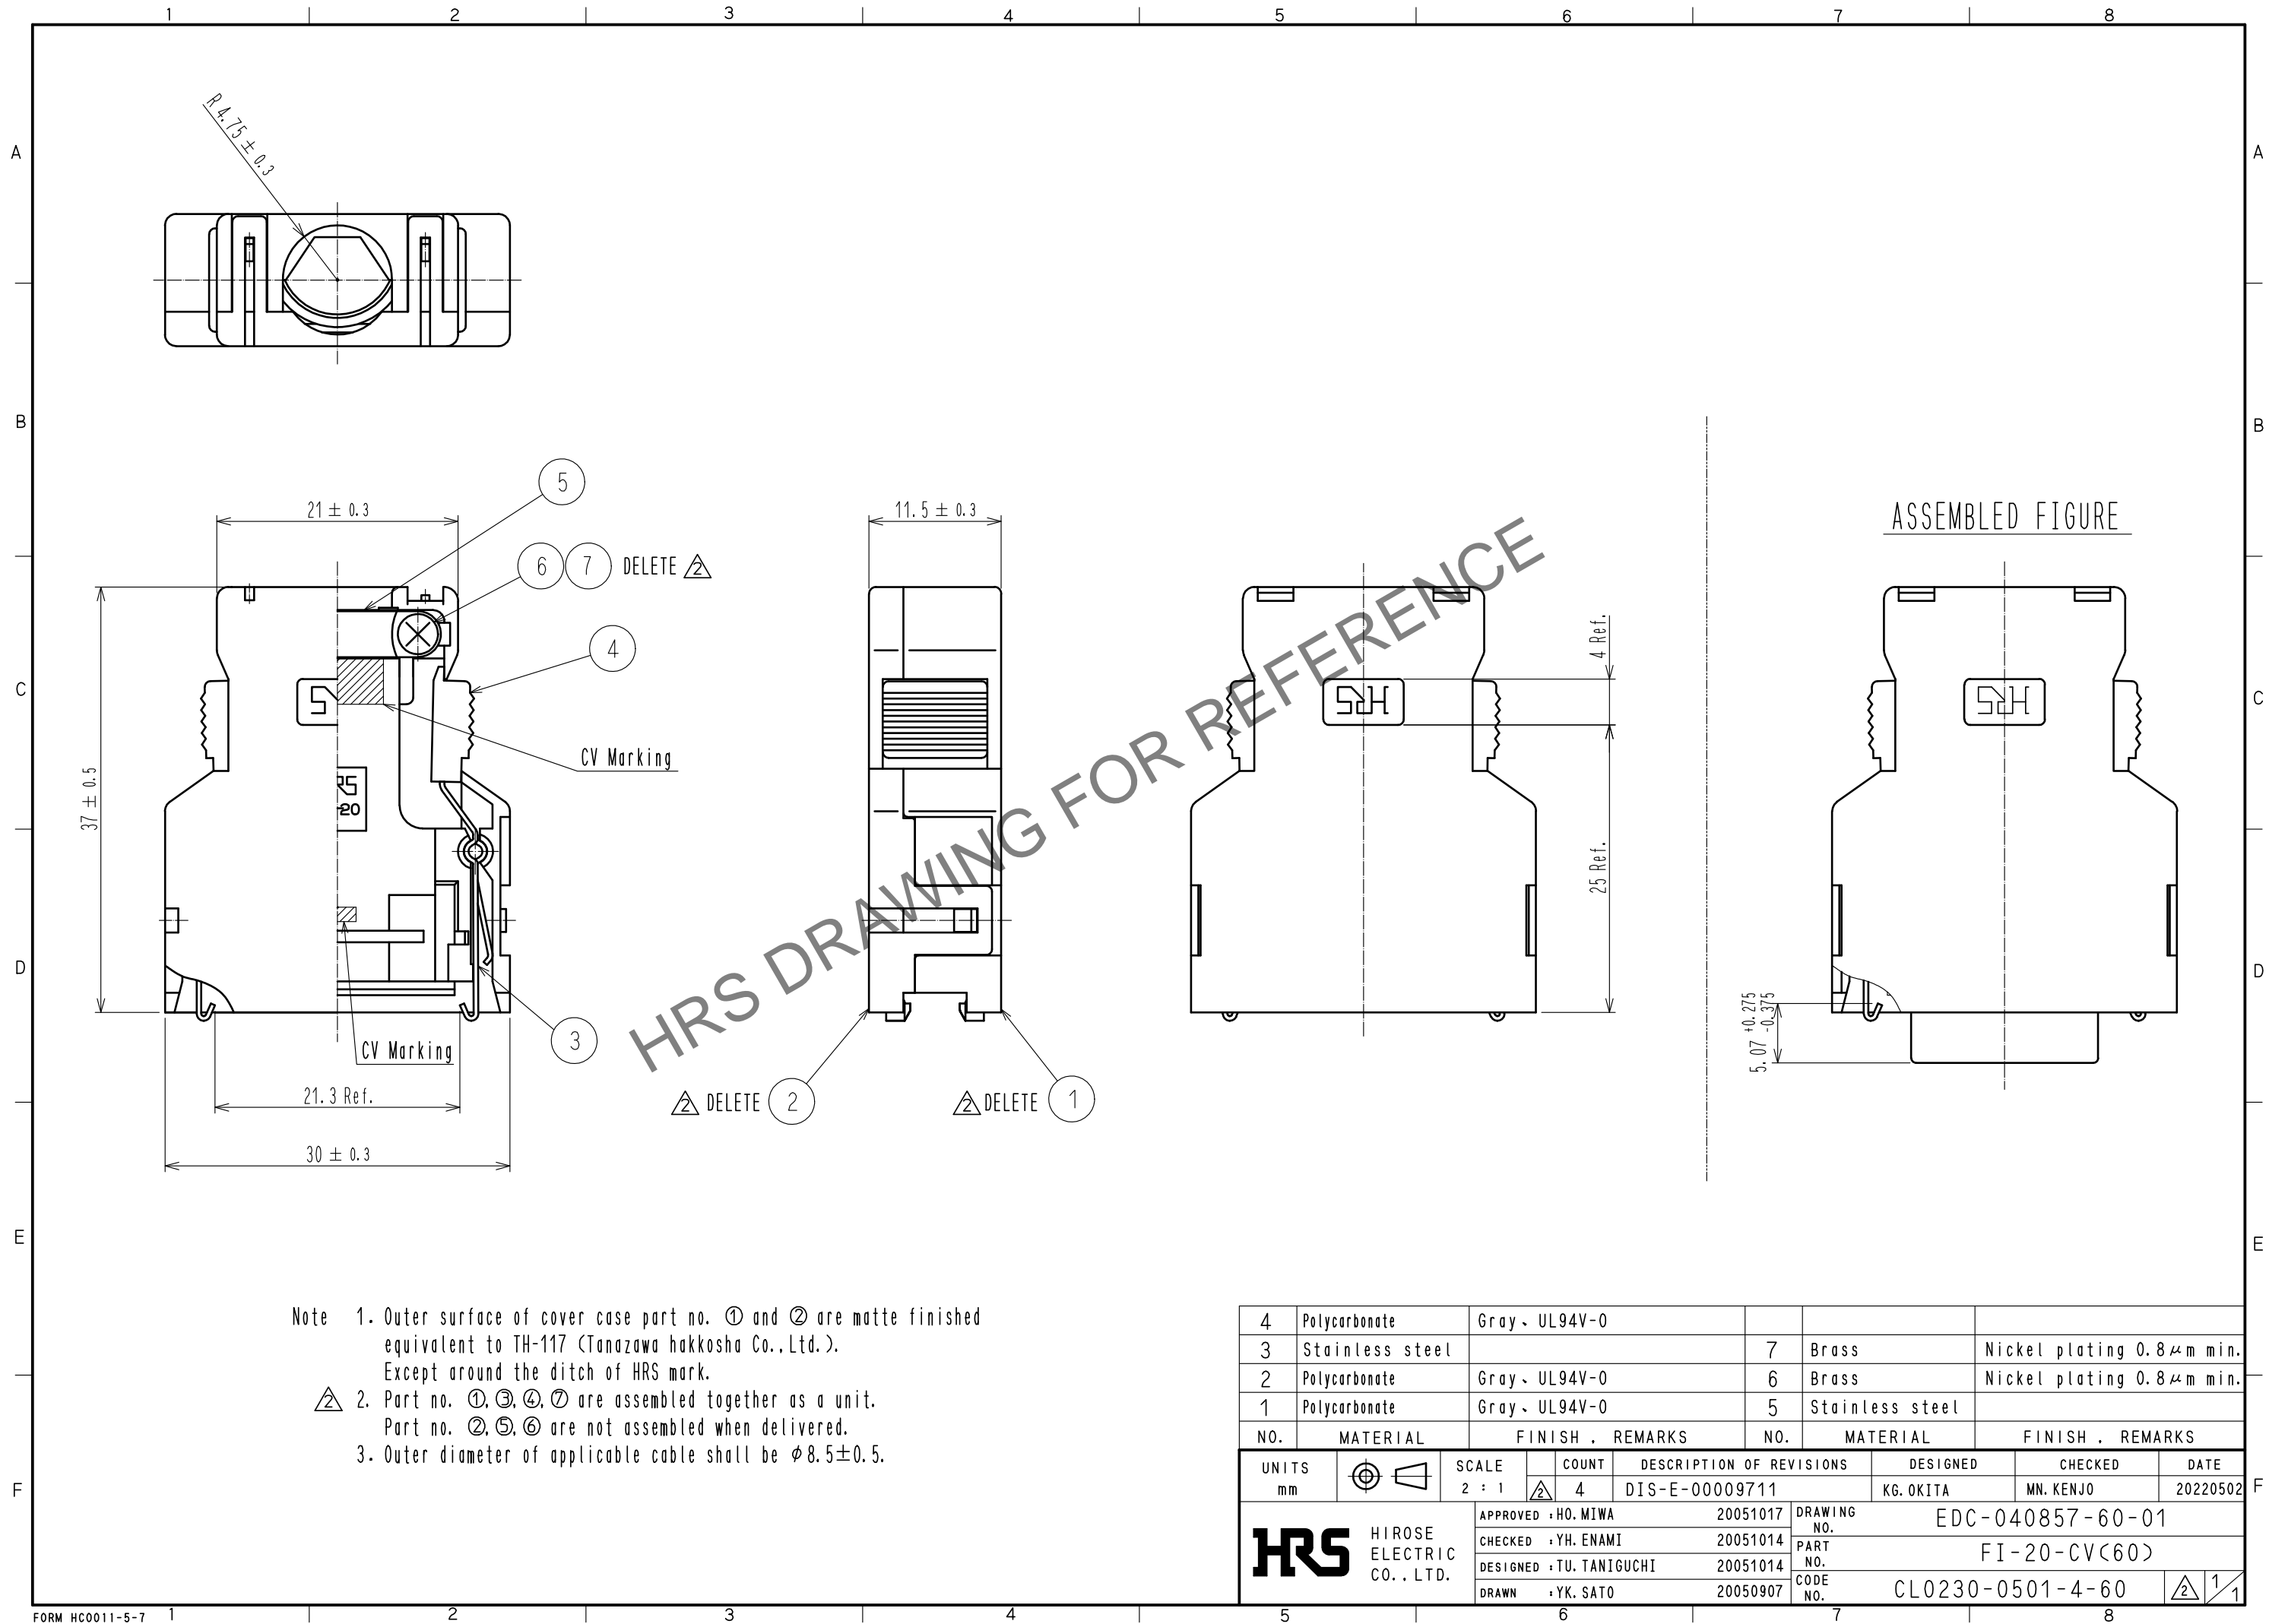

Note 1. Outer surface of cover case part no. ① and ② are matte finished equivalent to TH-117 (Tanazawa hakkosha Co., Ltd.).  
Except around the ditch of HRS mark.

② 2. Part no. ①, ③, ④, ⑦ are assembled together as a unit.  
Part no. ②, ⑤, ⑥ are not assembled when delivered.

3. Outer diameter of applicable cable shall be  $\phi 8.5 \pm 0.5$ .

4	Polycarbonate	Gray, UL94V-0			
3	Stainless steel		7	Brass	Nickel plating 0.8 $\mu$ m min.
2	Polycarbonate	Gray, UL94V-0	6	Brass	Nickel plating 0.8 $\mu$ m min.
1	Polycarbonate	Gray, UL94V-0	5	Stainless steel	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 2 : 1	COUNT 4	DESCRIPTION OF REVISIONS DIS-E-00009711	DESIGNED KG. OKITA
HIROSE ELECTRIC CO., LTD.		APPROVED : HO. MIWA	20051017	DRAWING NO.	EDC-040857-60-01
		CHECKED : YH. ENAMI	20051014	PART NO.	FI-20-CV(60)
		DESIGNED : TU. TANIGUCHI	20051014	CODE NO.	CL0230-0501-4-60
		DRAWN : YK. SATO	20050907		
					1/1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FI-20-CV\(60\)](#)