



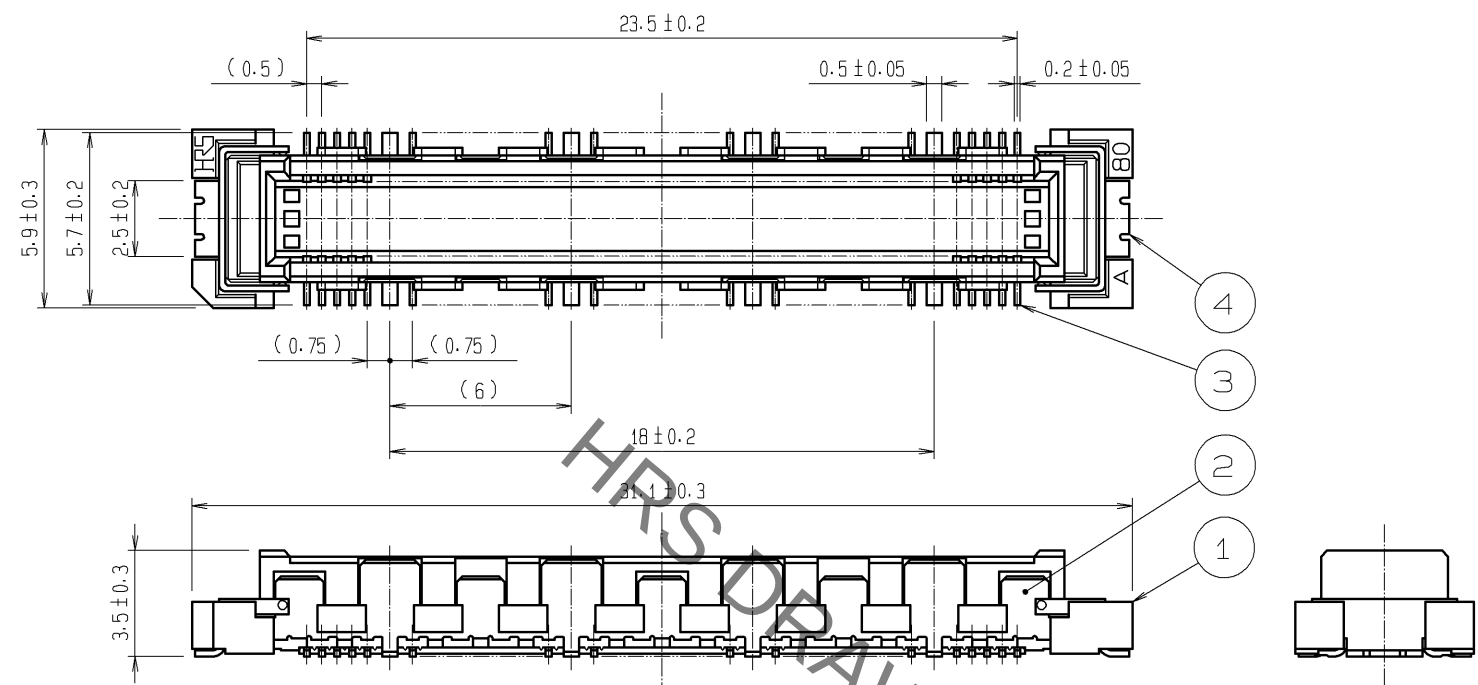


RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)


CROSS CUT SECTION - SIGNAL (5:1)

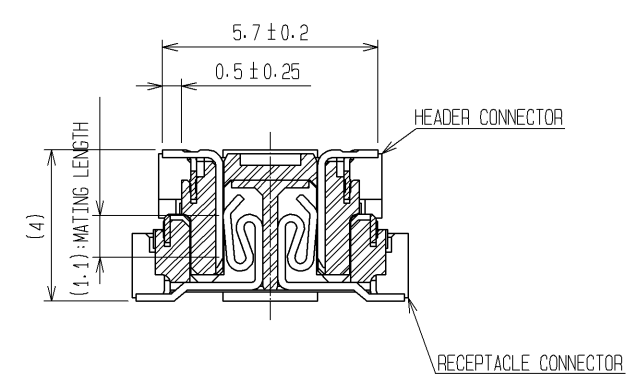

CROSS CUT SECTION - GROUND (5:1)

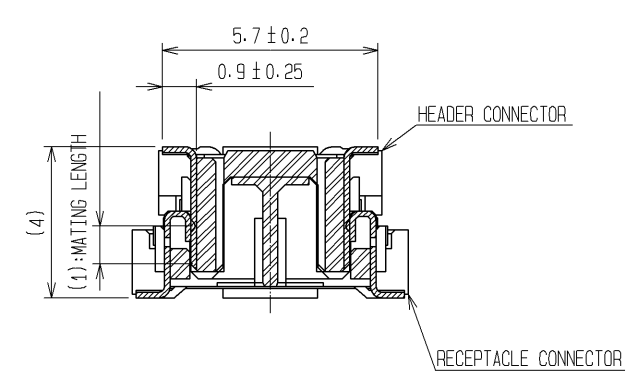

- NOTES
- ① 8 HATCHED PARTS: GROUND CIRCUIT.
 - ② 2 HATCHED PARTS: GROUND CIRCUIT.
 - 3 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - ⑤ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

			4	PHOSPHOR BRONZE	TIN-PLATING												
2	PHOSPHOR BRONZE	TIN-PLATING		3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.											
1	LCP	BEIGE UL94V-0			LEAD AREA :TIN-PLATING 1μm min.												
					UNDER PLATING : NICKEL 1μm min.												
NO.		MATERIAL		FINISH, REMARKS		NO.	MATERIAL		FINISH, REMARKS								
UNITS mm				SCALE 4 : 1				COUNT	DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE		
 HIROSE ELECTRIC CO., LTD.				APPROVED :HS. OKAWA				08.06.26		DRAWING NO.		EDC3-151948-25					
				CHECED :HT. YAMAGUCHI				08.06.25		PART NO.		FX10B-80P/8-SV(71)					
				DESIGNED :SY. KAMIGA				08.06.23		CODE NO.		CL570-0021-2-71					
				DRAWN :HK. SUNADORI				08.06.17									
												 1/1					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX10B-80P/8-SV\(71\)](#)