

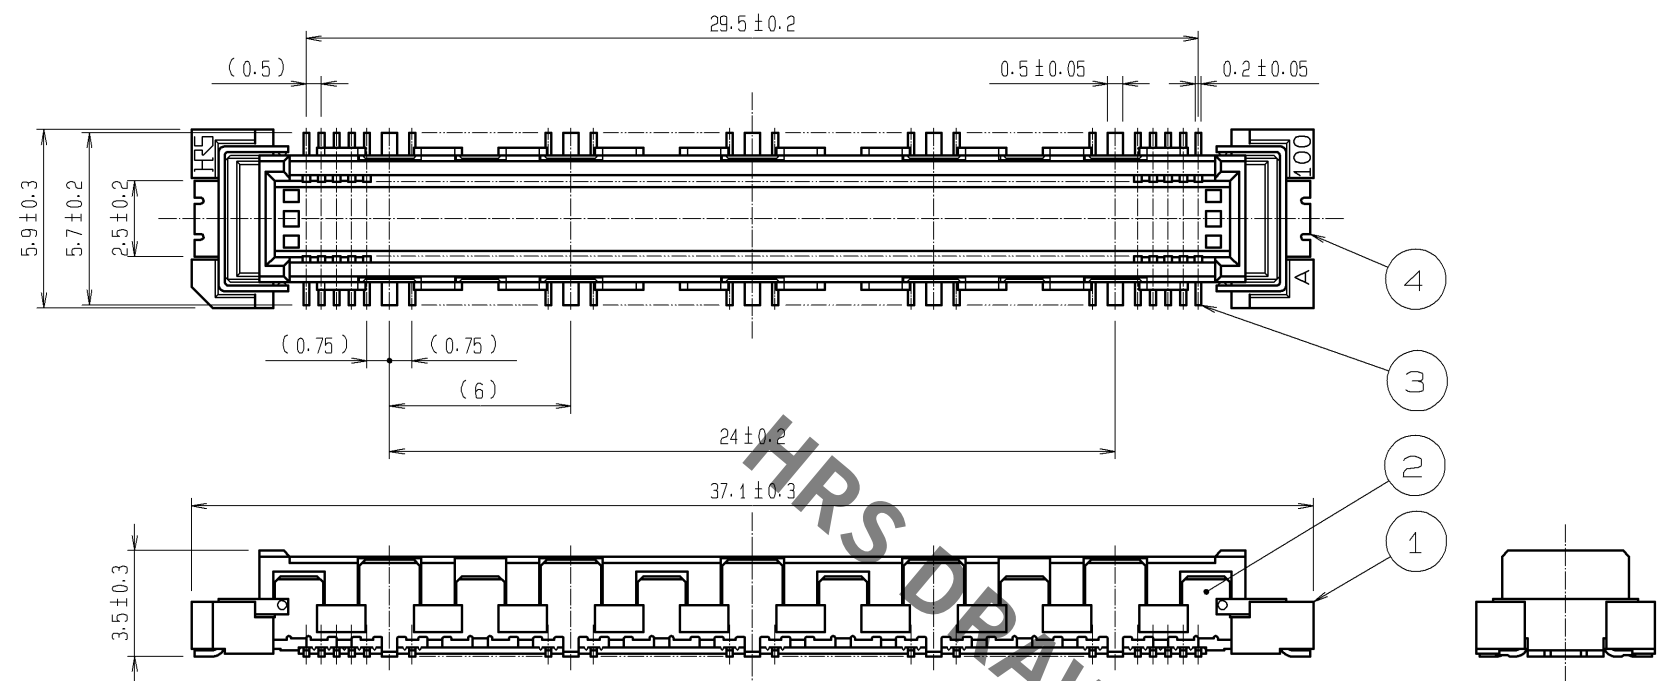


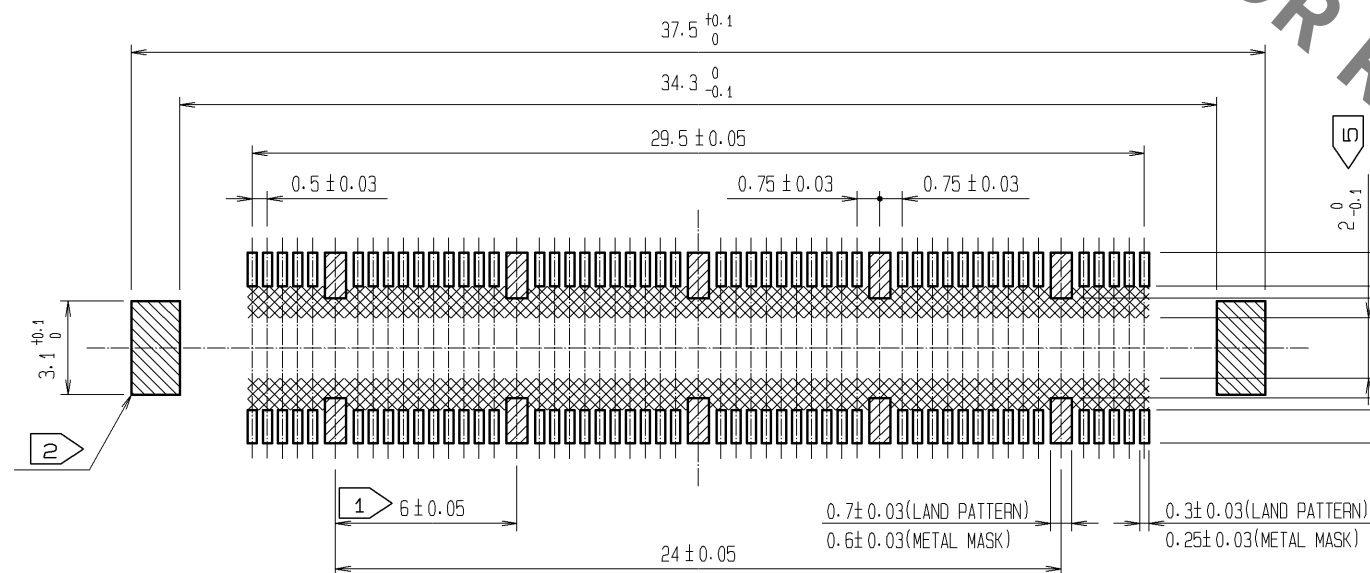


RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)




- NOTES
- 10 HATCHED  PARTS: GROUND CIRCUIT.
 - 2 HATCHED  PARTS: GROUND CIRCUIT.
 - 3 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 5 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

CROSS CUT SECTION - SIGNAL (5:1)

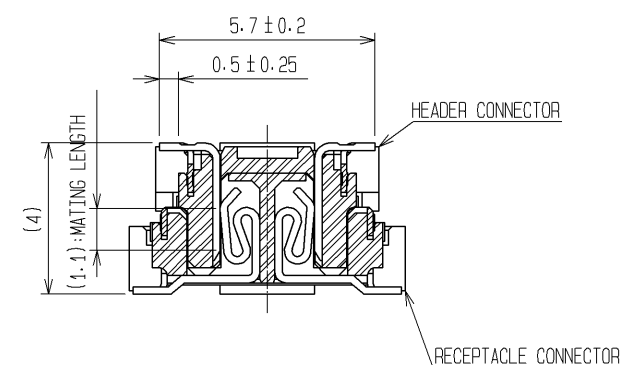

CROSS CUT SECTION - GROUND (5:1)

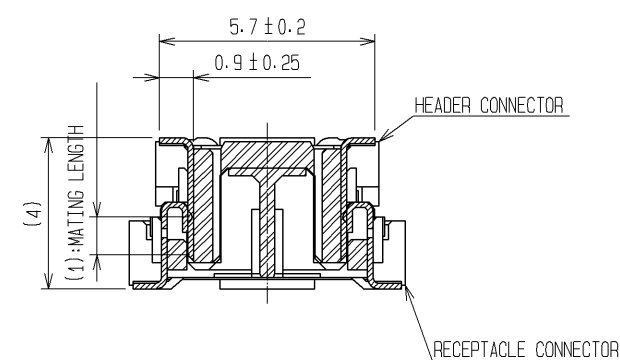

2	PHOSPHOR BRONZE	TIN-PLATING	4	PHOSPHOR BRONZE	TIN-PLATING
			3	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min. LEAD AREA: TIN-PLATING 1μm min. UNDER PLATING: NICKEL 1μm min.
1	LCP	BEIGE UL94V-0			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm			SCALE 4 : 1		
COUNT △			DESCRIPTION OF REVISIONS		
DESIGNED			CHECKED		
DATE			DATE		
APPROVED : HS. OKAWA 08.06.26			DRAWING NO. EDC3-151949-25		
CHECKED : HT. YAMAGUCHI 08.06.25			PART NO. FX10B-100P/10-SV(71)		
DESIGNED : SY. KAMIGA 08.06.23			CODE NO. CL570-0022-5-71		
DRAWN : HK. SUNADORI 08.06.17			△ 1/1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX10B-100P/10-SV\(71\)](#)