



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
3	RE-F-06522	J.M	m.Q	99.9.7					

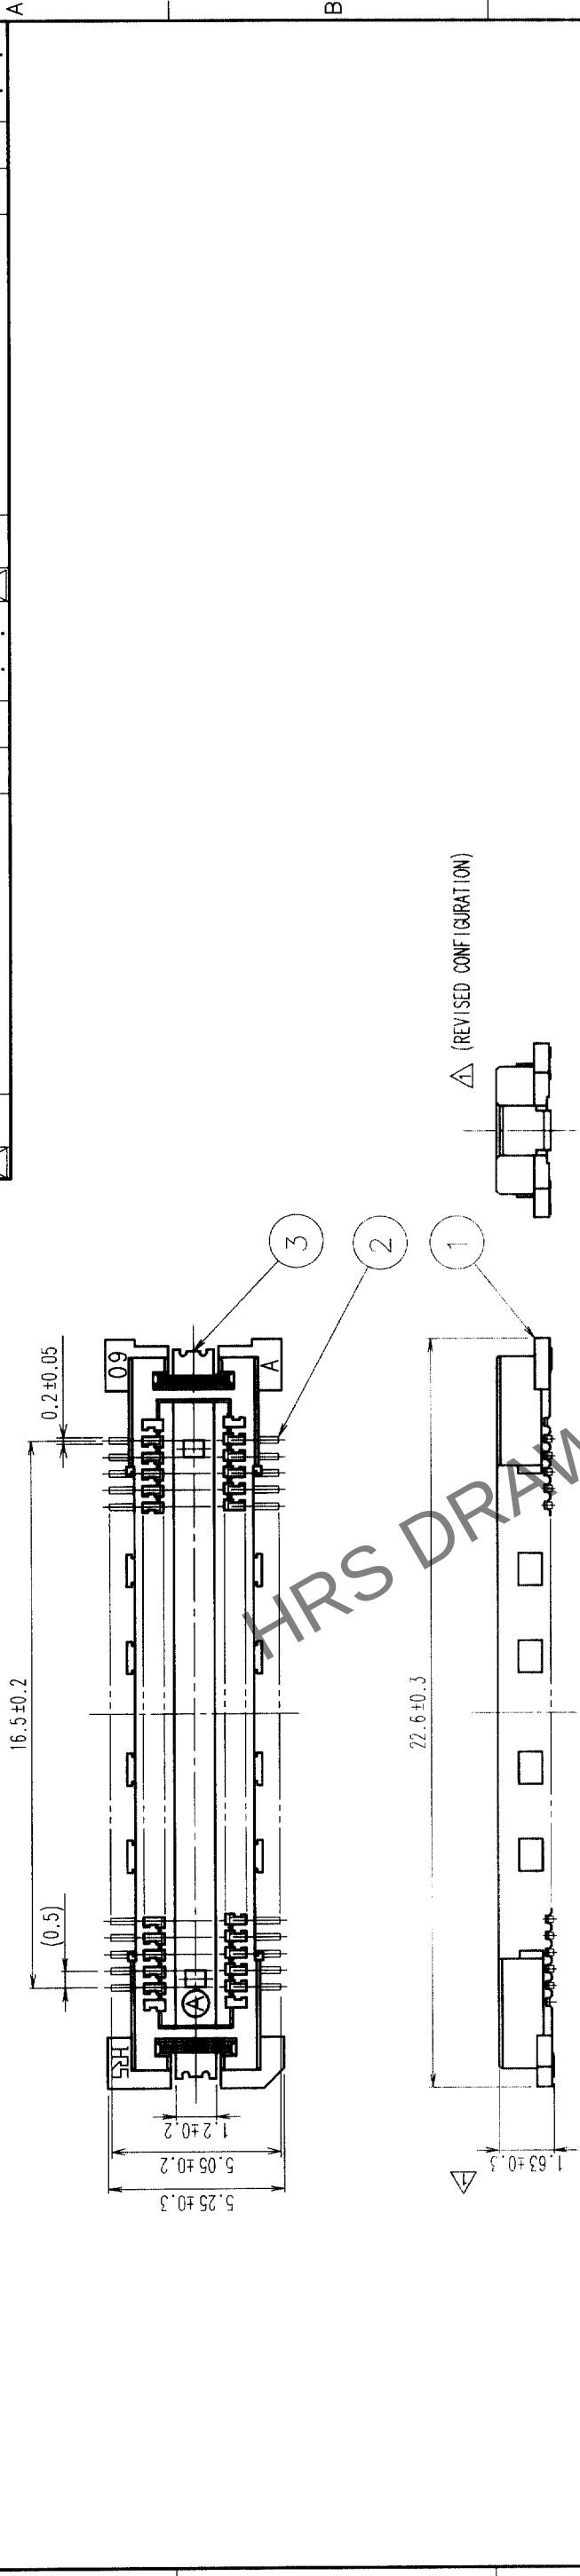

RECOMMENDED LAND PATTERN DIMENSION OF PCB

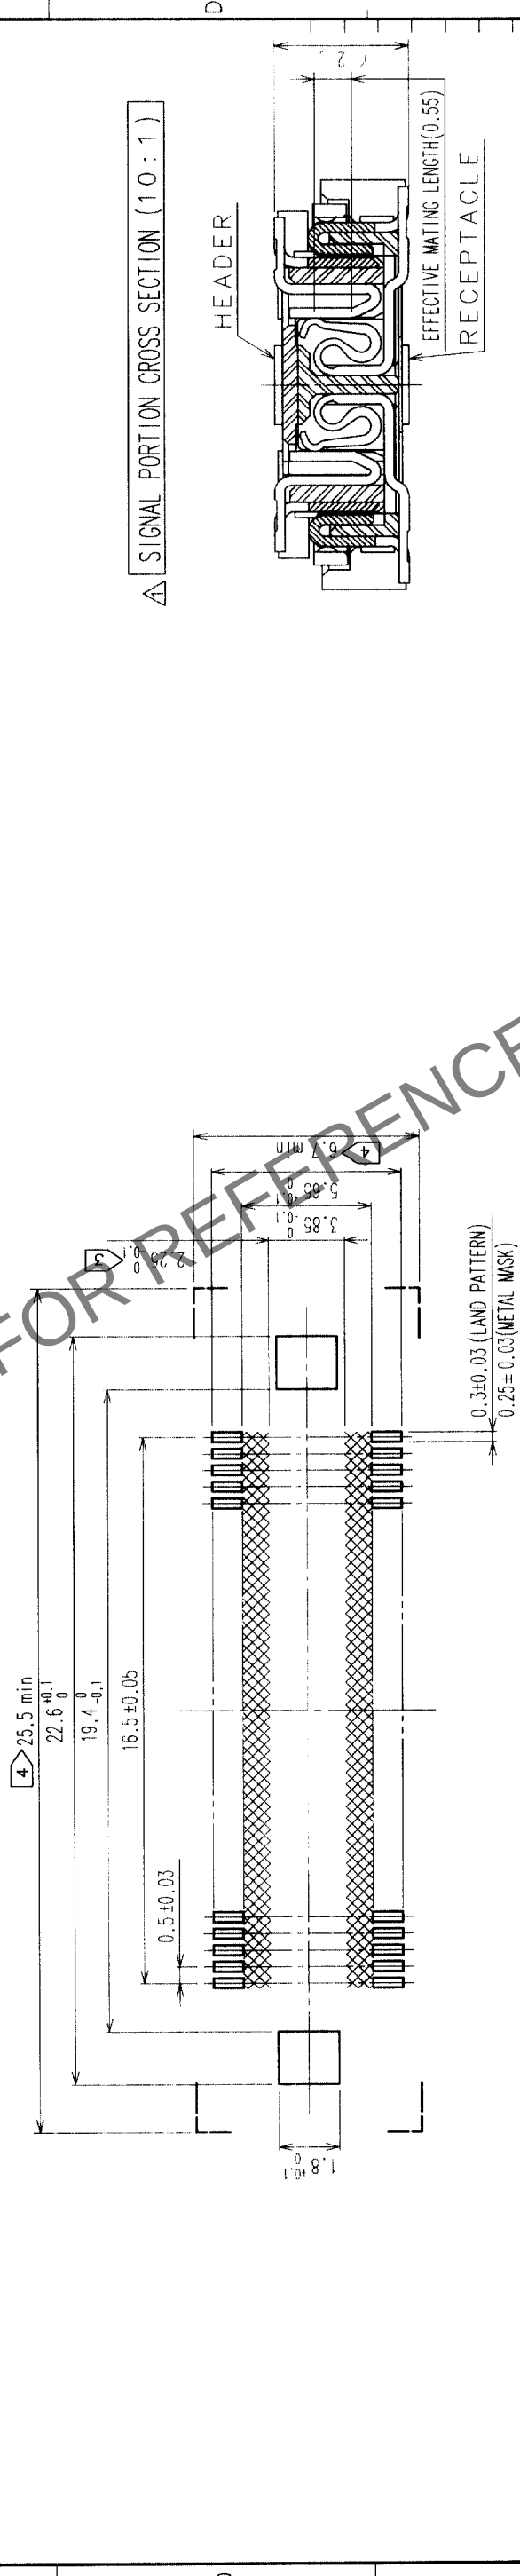

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1μm) OVER NICKEL				
1	LCP	LEAD: GOLD FLASH OVER NICKEL				
NO.	MATERIAL	FINISH, REMARKS	3	PHOSPHOR BRONZE	TIN PLATED	
CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		S.Kitajima	J.Matsukawa	M.Ishida	Y.Yoshimura	
		990525	990525	990526	990527	
DRAWING NO.		PART NO.		FX11LB-68P-SV		
EDC3-152104						
SCALE		5:1		CODE NO.		
UNITS		mm		CL573-0052-5		
				1		

NOTES 1 SMT LEAD-COPLANARITY: 0.1 MAX.
2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
4 DO NOT MOUNT OTHER DEVICES ONTO □ AREA, OR MATING PAIR CANNOT BE MATED.

TO
PCK

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX11LB-68P-SV](#)