	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

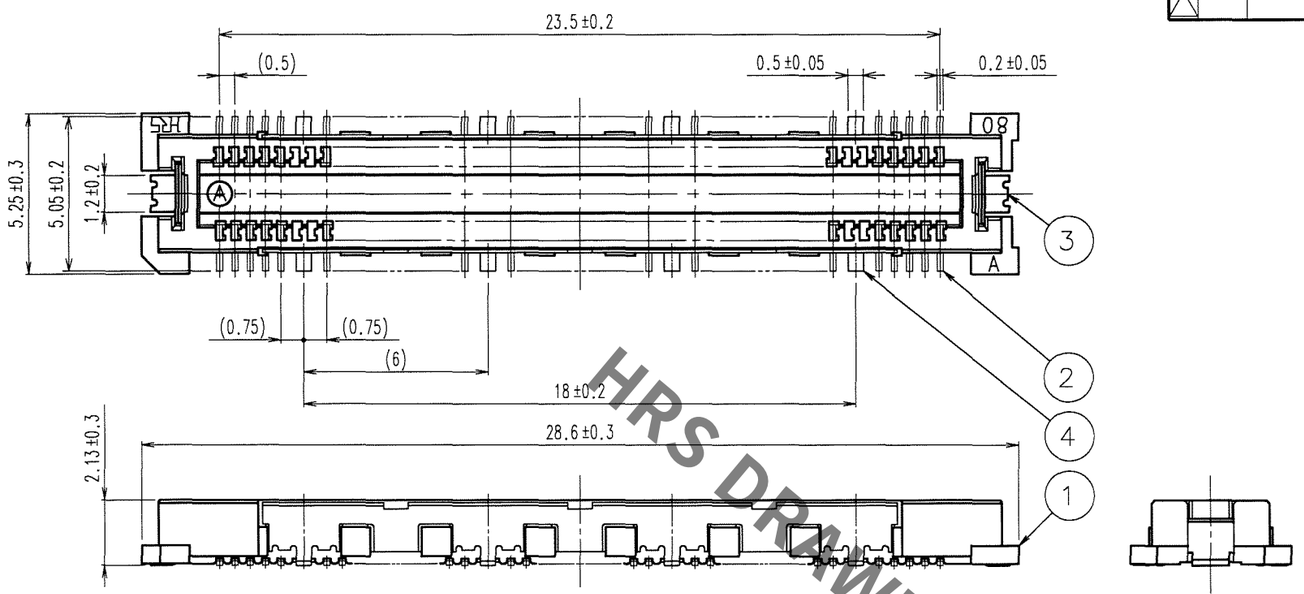

SIGNAL PORTION CROSS SECTION (10 : 1)

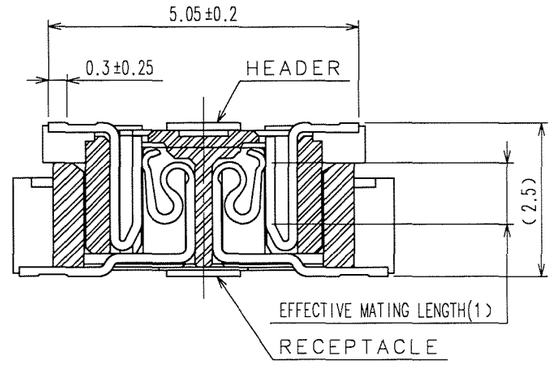

GROUND PORTION CROSS SECTION (10 : 1)

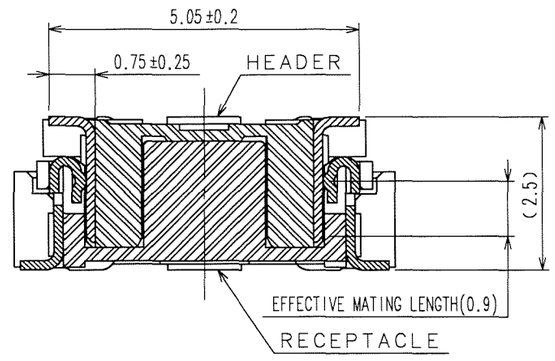

RECOMMENDED LAND PATTERN DIMENSION OF PCB

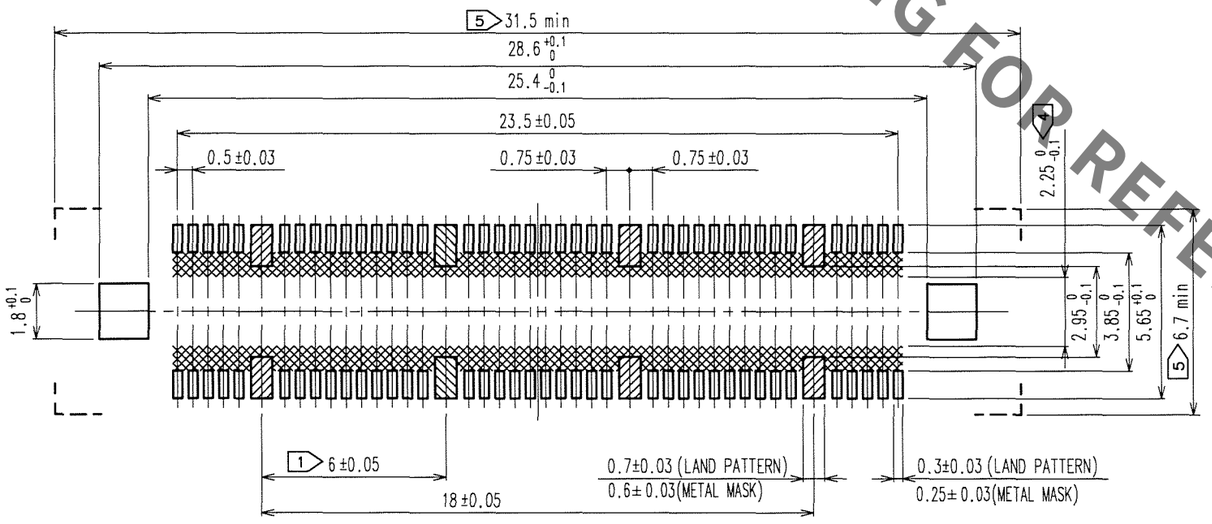

NOTES 1 8 HATCHED ▨ PARTS:GROUND CIRUIT.
2 SMT LEAD-COPLANARITY:0.1 MAX.
3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
4 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED ▩ AREA.)
5 DO NOT MOUNT OTHER DEVICES ONTO ⊏ ⊐ AREA ,OR MATING PAIR CANNOT BE MATED.
6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
3, 4	PHOSPHOR BRONZE	TIN-PLATING	2	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μm min.
1	LCP	BEIGE UL94V-0			LEAD AREA:GOLD FLASH
					UNDER PLATING:NICKEL 1 μm min.

CODE NO.(OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	S.KAMIGA 06.05.13	H.Nakamura '06.05.13	Y.Ozawa '06.05.13	H.Okawa '06.05.13	

SCALE	DRAWING NO.	PART NO.
5 : 1	EDC3-152602-25	FX11B-80P/8-SV(71)
UNITS mm	HRS HIROSE ELECTRIC CO.,LTD.	CODE NO. CL573-0513-6-71 1/1

TO
PCK

FORM NO.229

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Hirose Electric:
FX11B-80P/8-SV(71)