


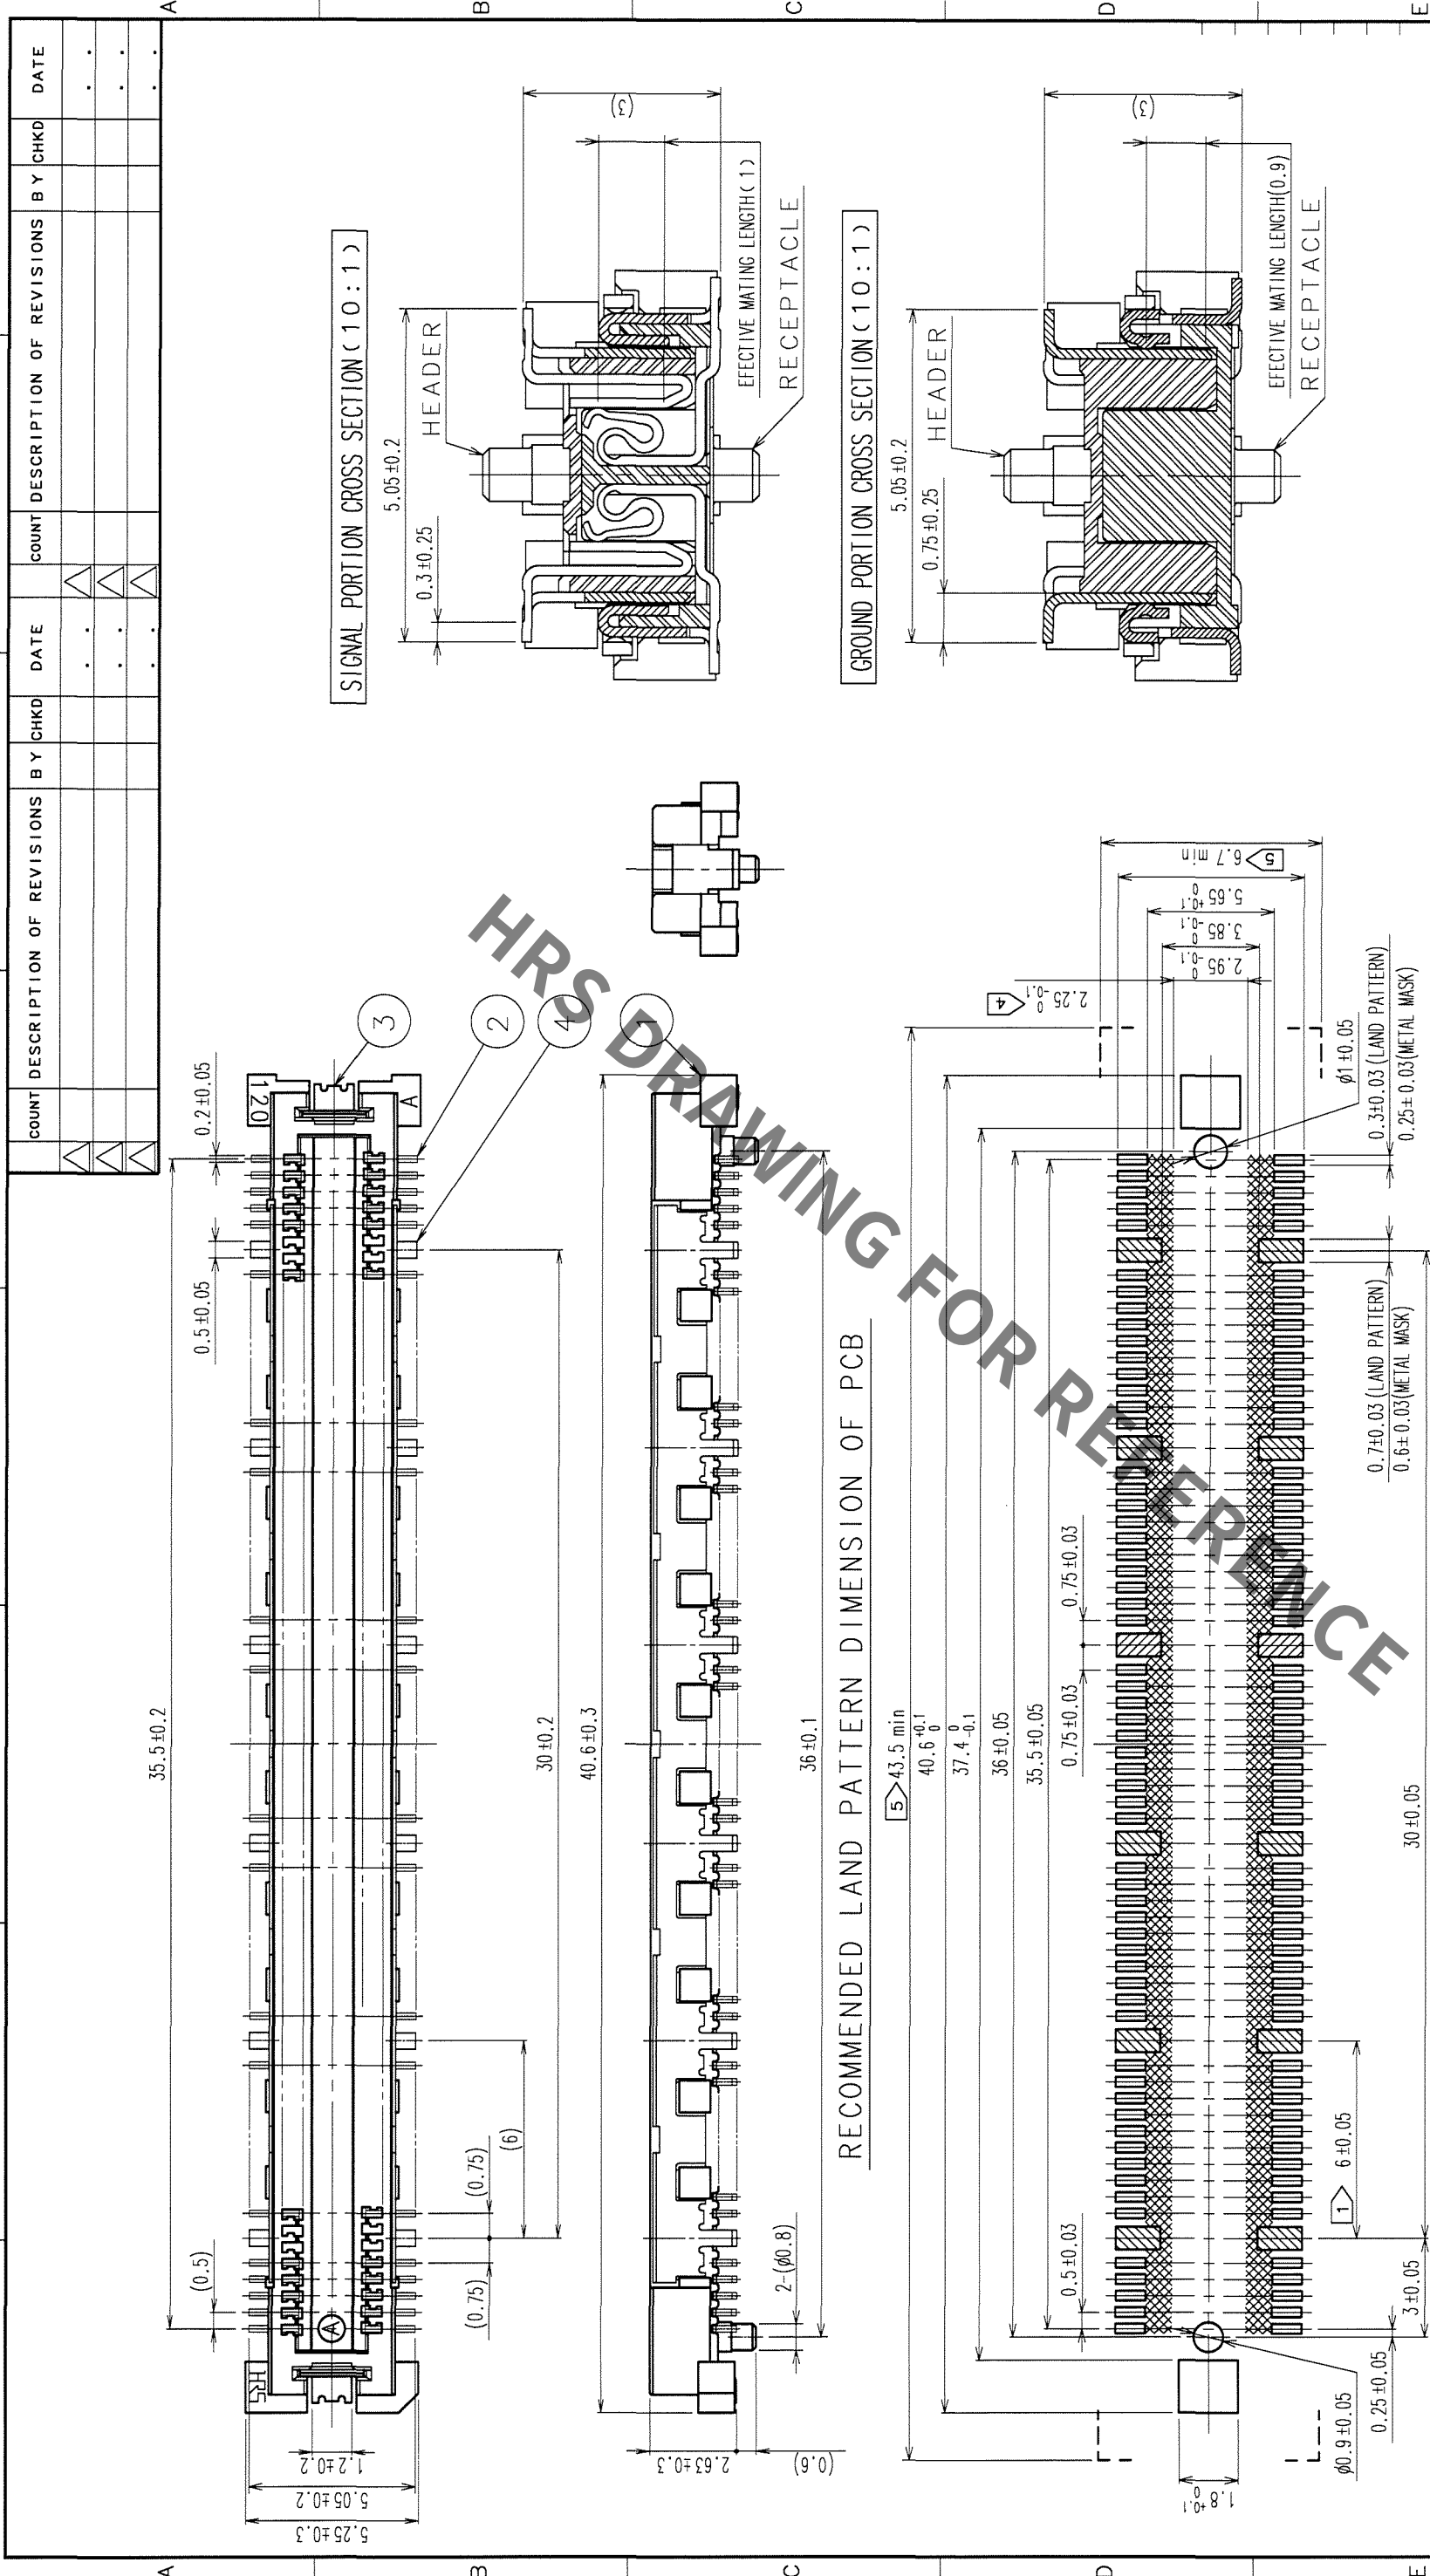

RECOMMENDED LAND PATTERN DIMENSION OF PCB

- NOTES
- 1 12 HATCHED PARTS: GROUND CIRCUIT.
 - 2 SMT LEAD-COPPLANARITY: 0.1 MAX.
 - 3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 4 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 5 DO NOT MOUNT OTHER DEVICES ONTO □ AREA, OR MATING PAIR CANNOT BE MATED.
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3, 4 PHOSPHOR BRONZE		TIN-PLATING		2 COPPER ALLOY		CONTACT AREA: GOLD 0.1 μm min.	
1	LCP	BEIGE	UL94V-0			LEAD AREA: GOLD FLASH	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	UNDER PLATING: NICKEL 1 μm min.	
CODE NO. (OLD)		DRAWN		DESIGNED		CHECKED	
CL		K. NAKAMURA		K. NAKAMURA		H. Okura	
		06.02.20		06.02.20		06.02.20	
DRAWING NO.		PART NO.		CODE NO.		1	
EDC3-152617-25		FX11A-120P/12-SVO.5(71)		CL573-0605-2-71		8 FORM NO. 229	
SCALE		UNITS					
5 : 1		mm					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX11A-120P/12-SV0.5\(71\)](#)