

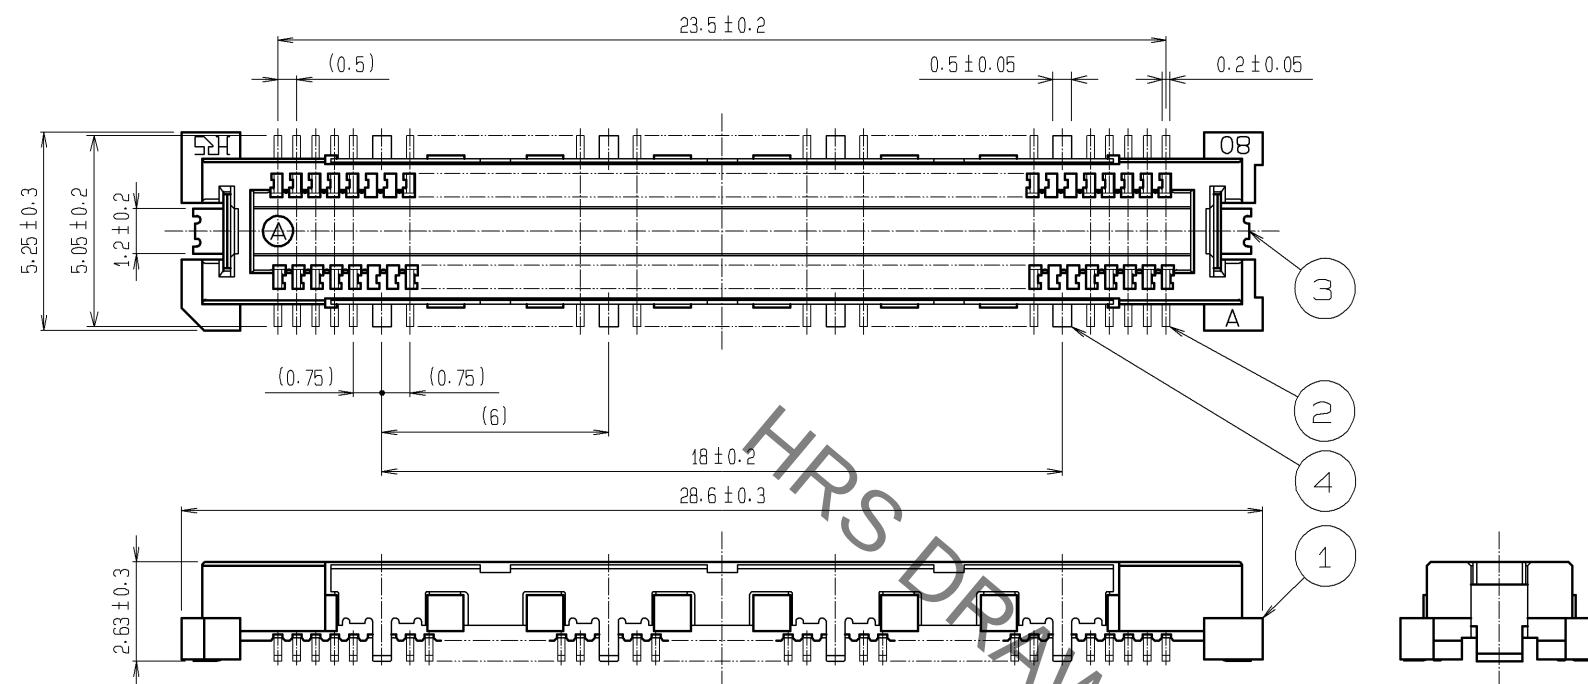
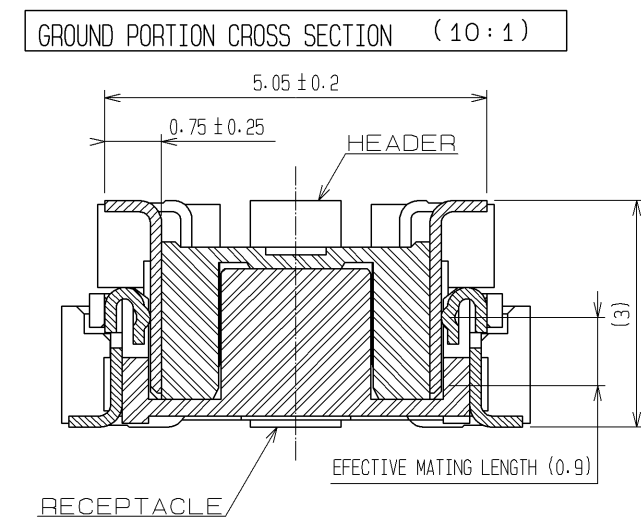
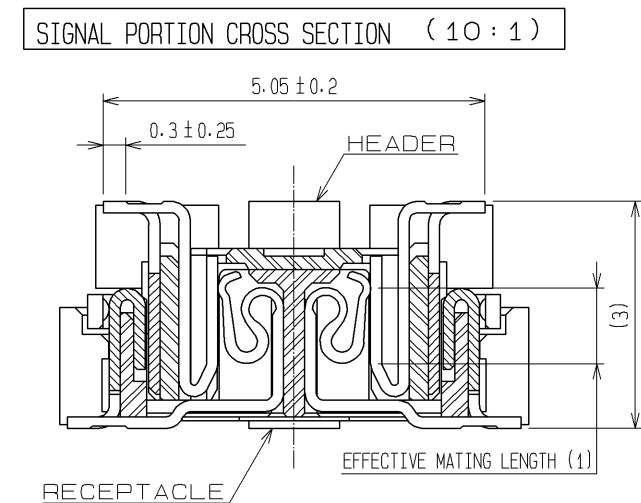


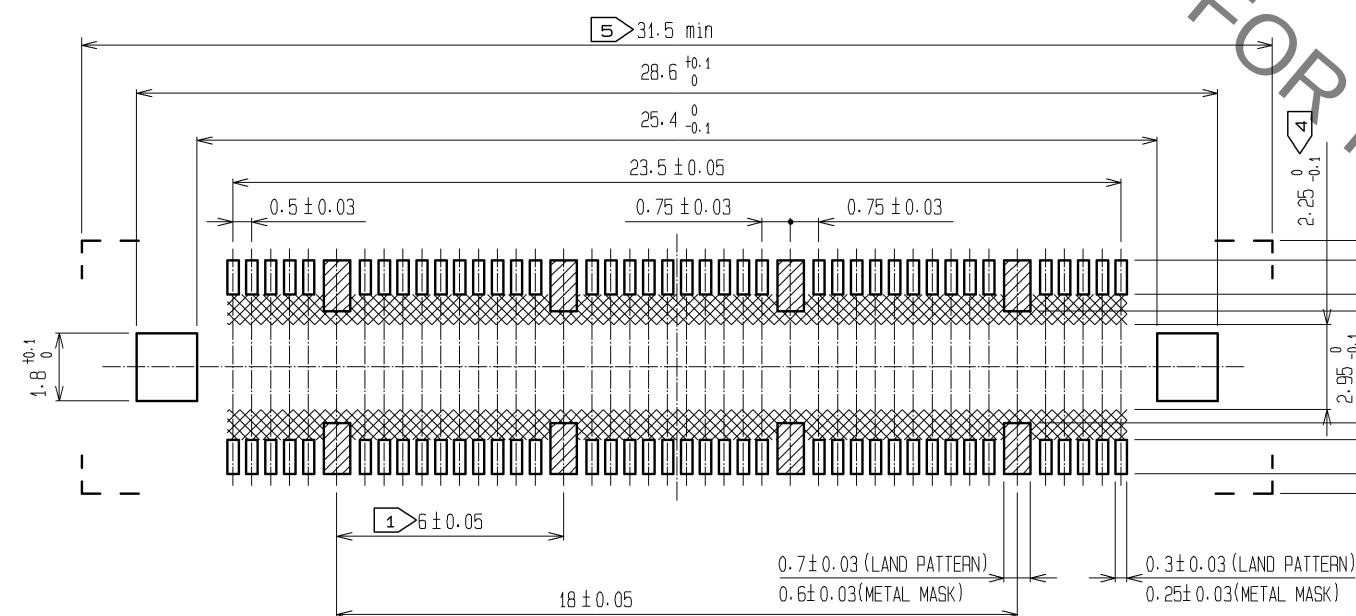

RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS:0.15mm)



- NOTES
- 1) 8 HATCHED  PARTS: GROUND CIRCUIT.
 - 2 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 4) MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
 - 5) DO NOT MOUNT OTHER DEVICES ONTO [] AREA ,OR MATING PAIR CANNOT BE MATED.
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3. 4		PHOSPHOR BRONZE	TIN PLATING	2	COPPER ALLOY	CONTACT AREA : GOLD 0.1μm min.												
1		LCP	BEIGE UL94V-0			LEAD AREA : GOLD 0.05μm min.												
						UNDER PLATING : NICKEL 1μm min.												
NO.		MATERIAL		FINISH .		REMARKS		NO.	MATERIAL	FINISH .		REMARKS						
UNITS mm				SCALE 5 : 1				COUNT	DESCRIPTION OF REVISIONS				DESIGNED		CHECKED		DATE	
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		12. 03. 12		DRAWING NO. EDC3-152619-25												
		CHECED : HT. YAMAGUCHI		12. 03. 12		PART NO. FX11B-80P/8-SV0. 5(71)												
		DESIGNED : TS. MIYAKI		12. 03. 12		CODE NO. CL573-0613-0-71												
		DRAWN : TS. MIYAKI		12. 03. 12		 												

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX11B-80P/8-SV0.5\(71\)](#)