



5	6	7	8
COUNT DESCRIPTION OF REVISIONS	BY CHKD	DATE	COUNT DESCRIPTION OF REVISIONS
△			
△			
△			

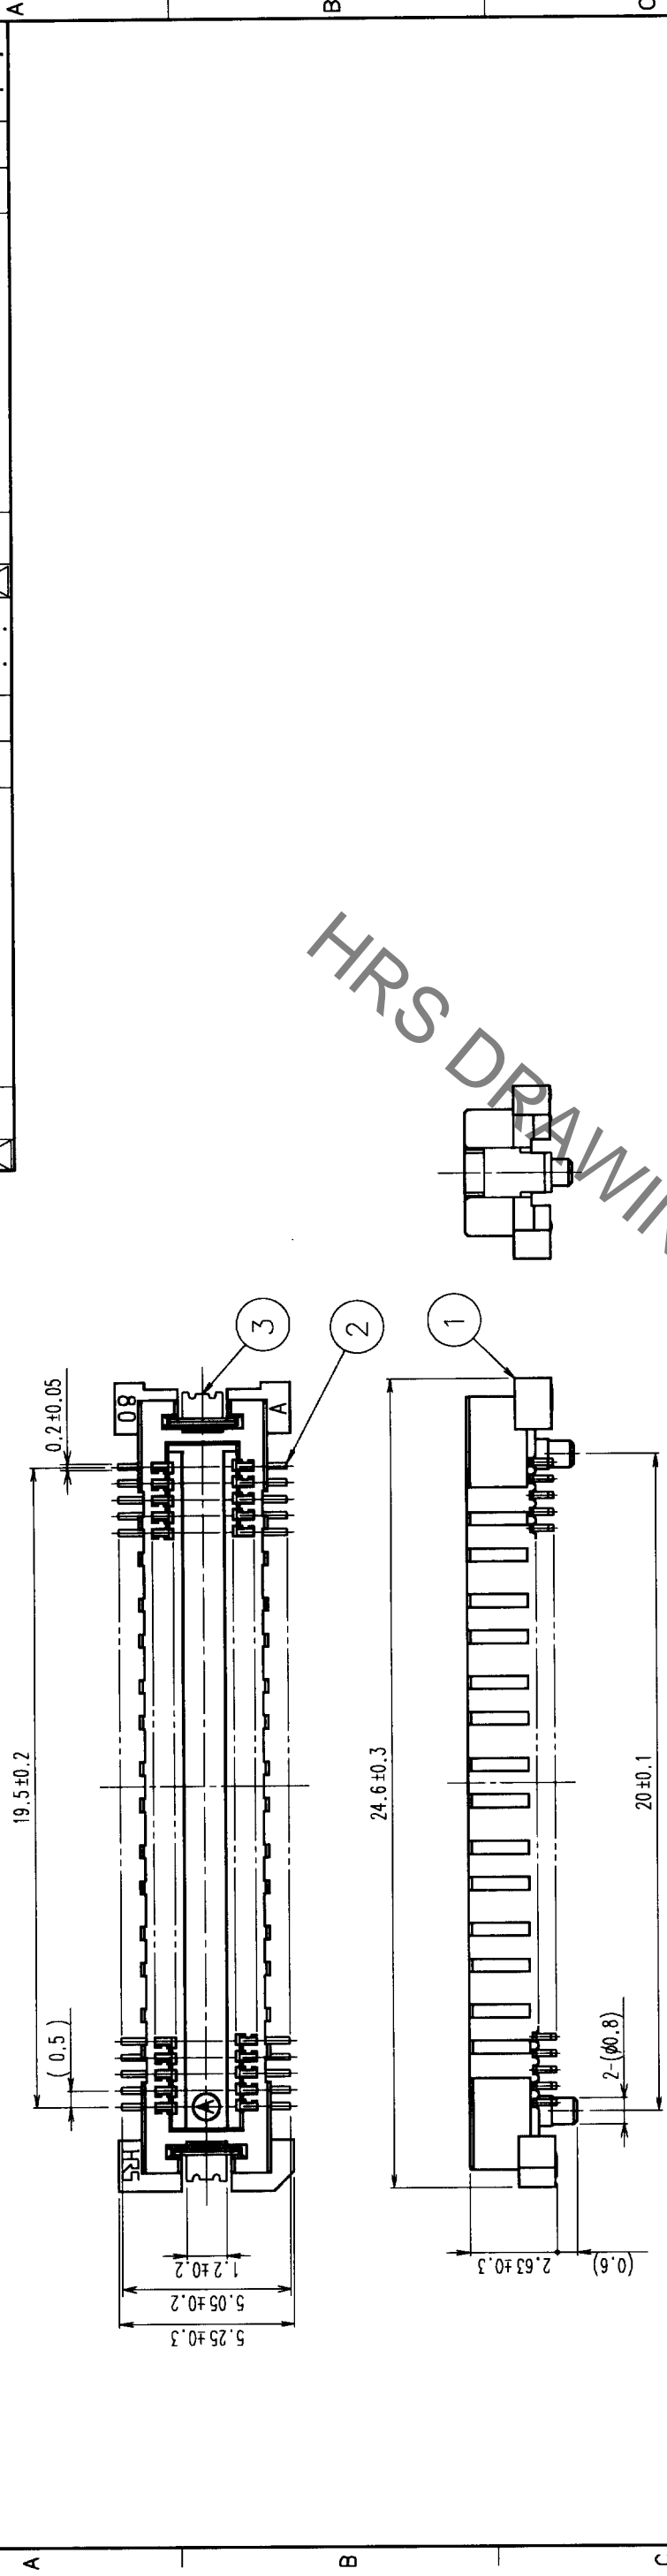

RECOMMENDED LAND PATTERN DIMENSION OF PCB

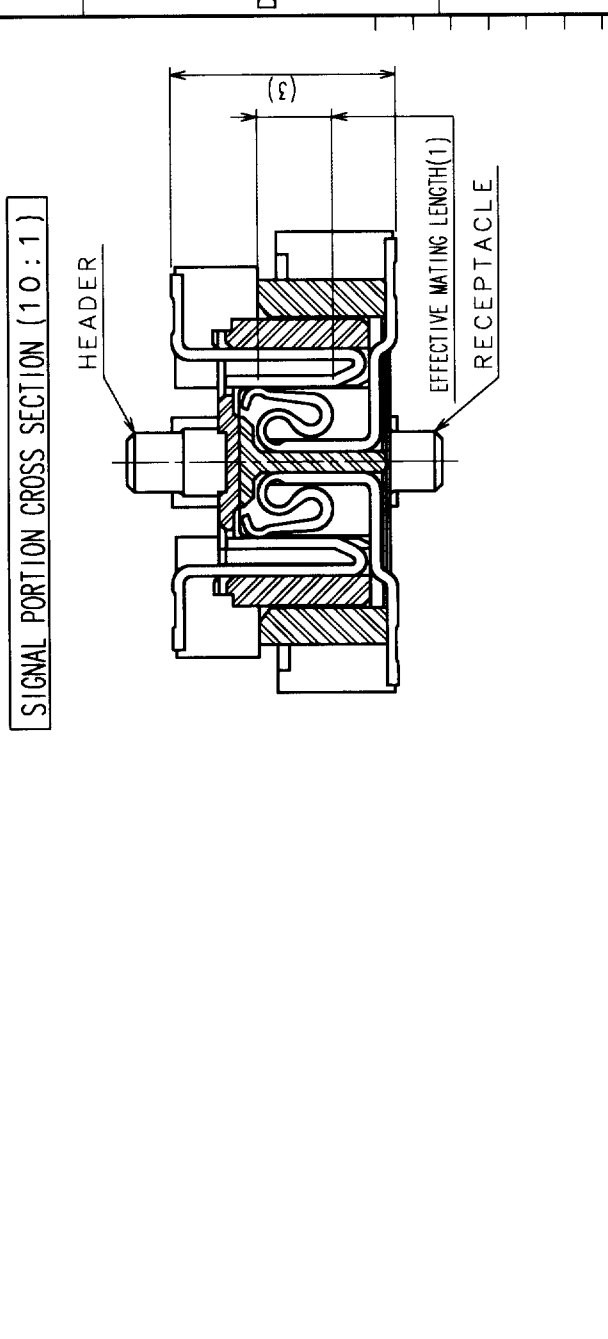

SIGNAL PORTION CROSS SECTION (10:1)

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1μm) OVER NICKEL			
1	LCP	LEAD: GOLD FLASH OVER NICKEL			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CL		BEIGE UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED
CODE NO. (OLD)		DRAWN		DESIGNED	CHECKED
		H. Hirayama		T. Takano	A. Okawa
		01.01.30		01.01.30	01.01.30
DRAWING NO.		PART NO.		APPROVED	
EDC3-152626		FX11A-80P-SV0.5		J. Yoshimura	
SCALE		CODE NO.		RELEASED	
5:1		CL573-0648-5			
UNITS		HIROSE ELECTRIC CO., LTD.			
mm					

- NOTES
- SMT LEAD CO-PLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND .OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - DO NOT MOUNT OTHER DEVICES ONTO [] AREA .OR MATING PAIR CANNOT BE MATED.

TO	
PCK	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX11A-80P-SV0.5](#)