




COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE
	△						△				
	△						△				
	△						△				

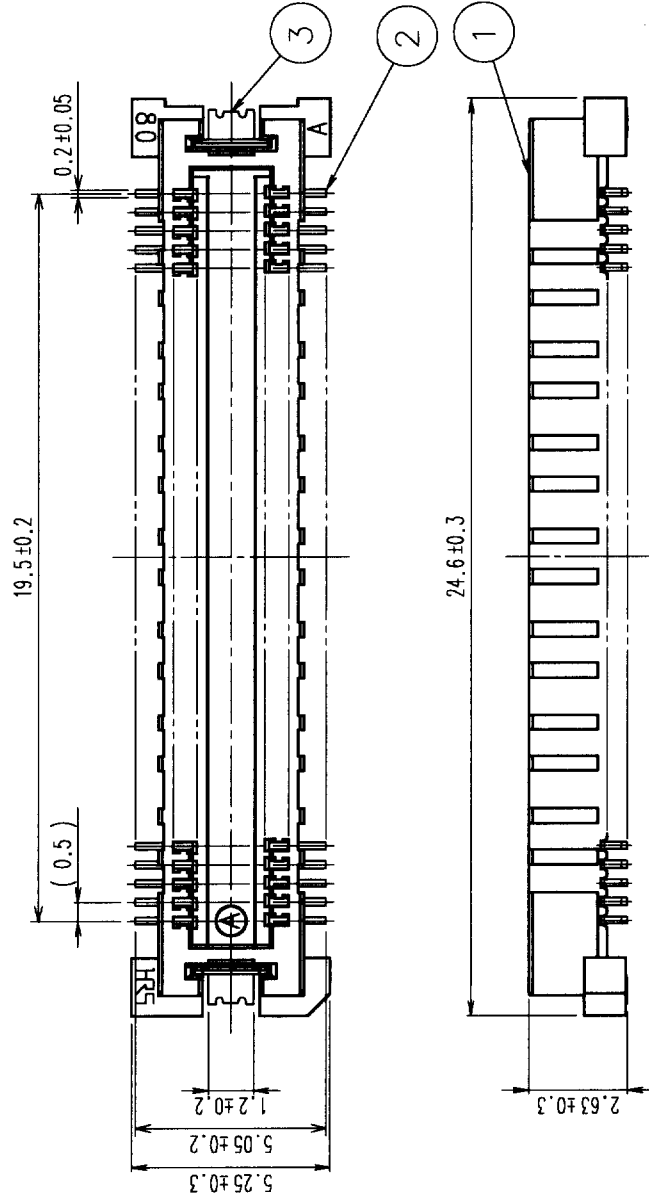

RECOMMENDED LAND PATTERN DIMENSION OF PCB

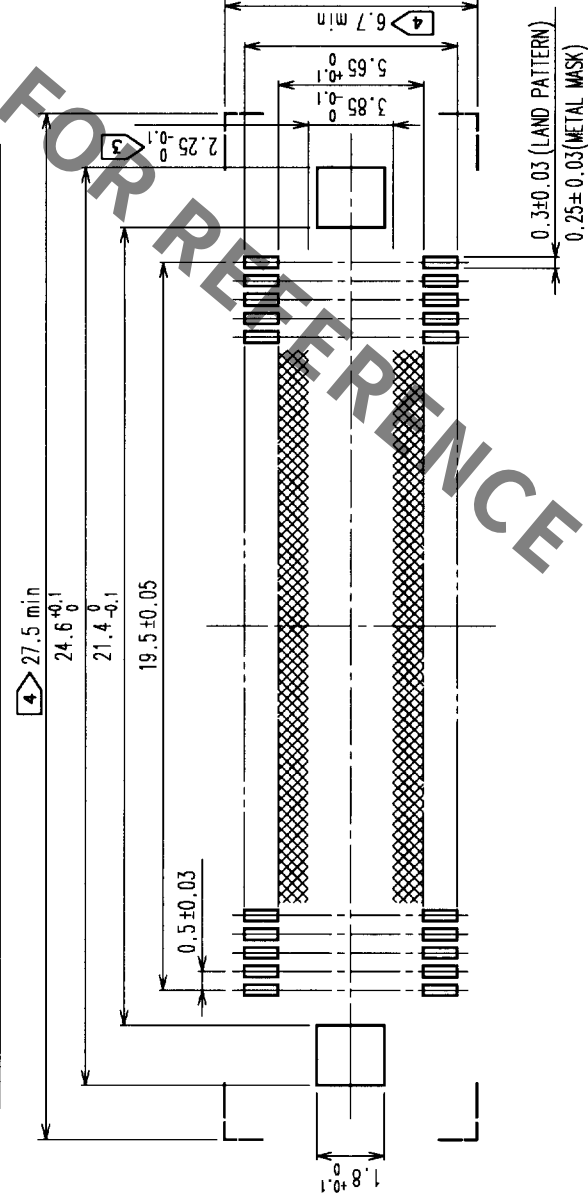

SIGNAL PORTION CROSS SECTION (10:1)

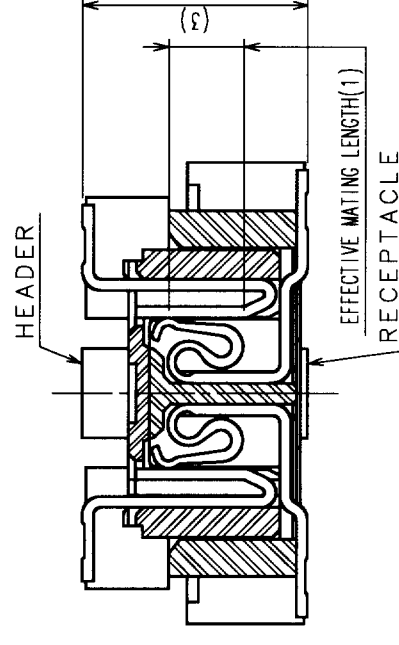

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1μm) OVER NICKEL
1	LCP	LEAD: GOLD FLASH OVER NICKEL
NO.	MATERIAL	BEIGE UL94V-0
		FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	<i>J. MacLachlan</i>	<i>J. MacLachlan</i>	<i>H. Okawa</i>	<i>W. Yoshimura</i>	
	<i>00-05-08</i>	<i>00-05-08</i>	<i>00-05-09</i>	<i>00-05-09</i>	

 SCALE 5 : 1	DRAWING NO. EDC3-152631	PART NO. FX11B-80P-SV0.5	CODE NO. CL573-0658-9	1
				1
UNITS mm		HIROSE ELECTRIC CO., LTD.		

NOTES

- ¹ SMT LEAD-COPLANARITY: 0.1 MAX.
- ² THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
- ☒ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
- ☒ DO NOT MOUNT OTHER DEVICES ONTO ☐ AREA, OR MATING PAIR CANNOT BE MATED.

TO	PCK			
----	-----	--	--	--

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX11B-80P-SV0.5](#)