




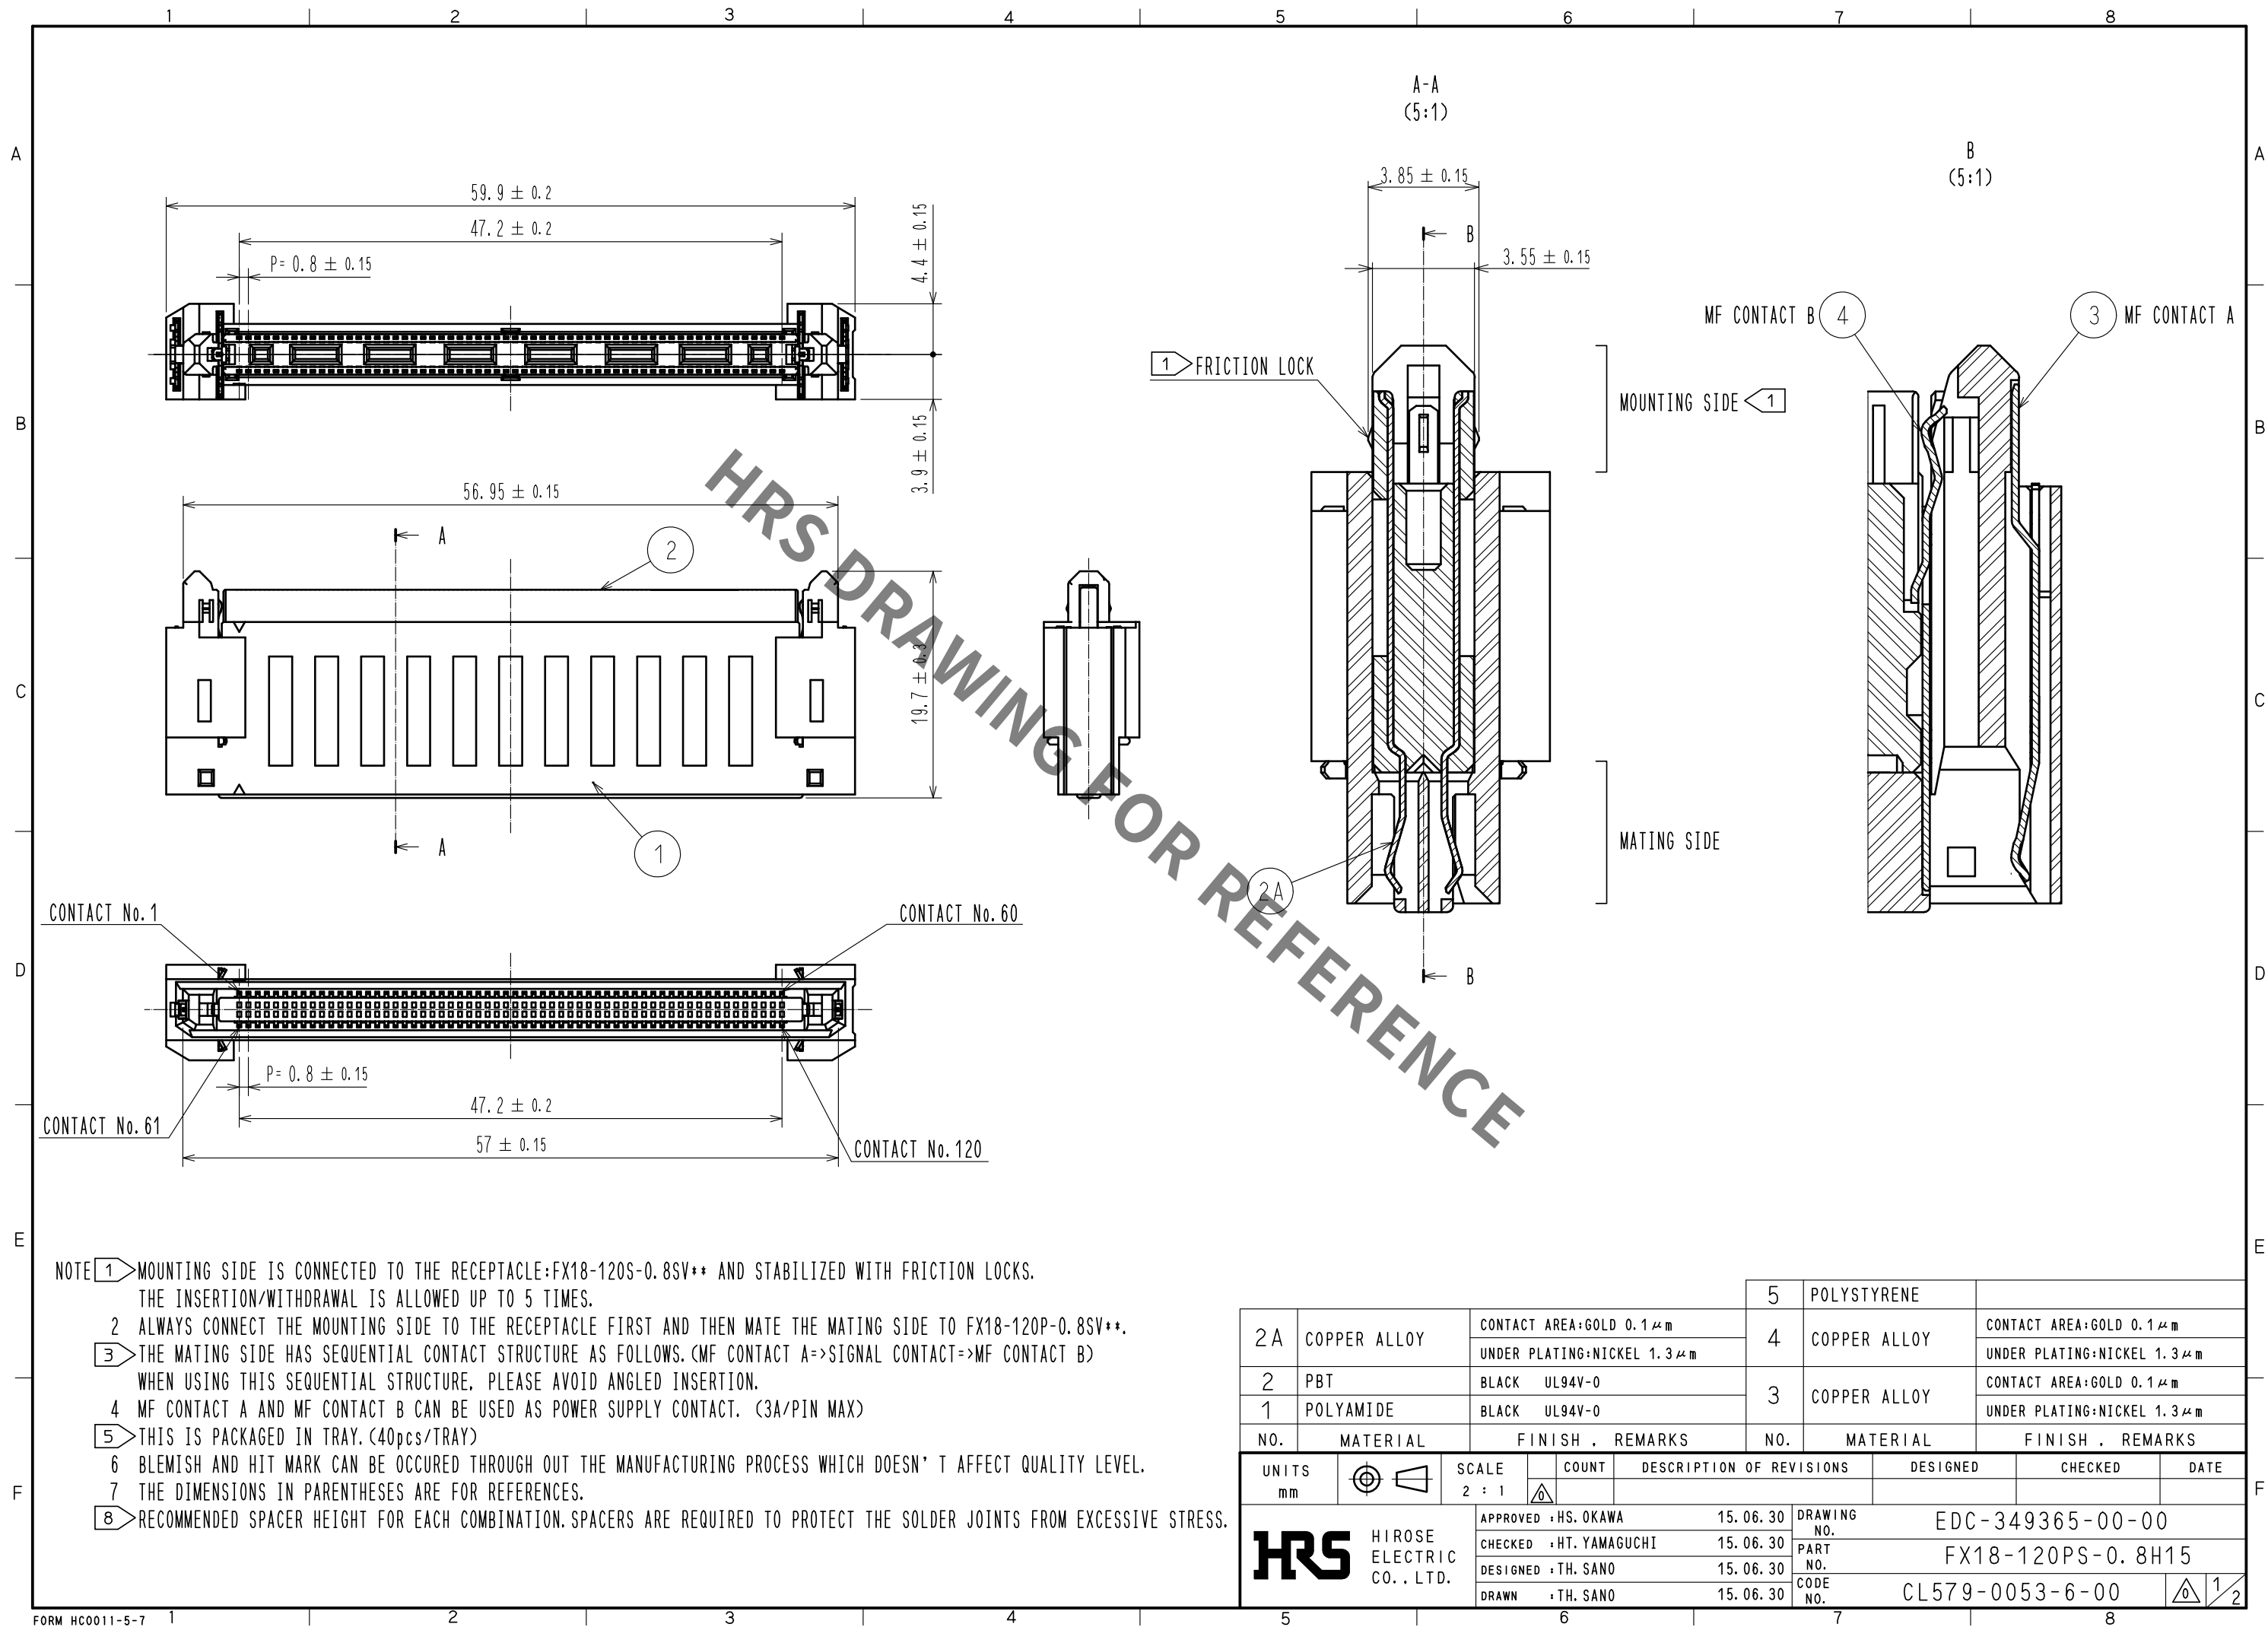


5 DRAWING FOR PACKING(1:2)

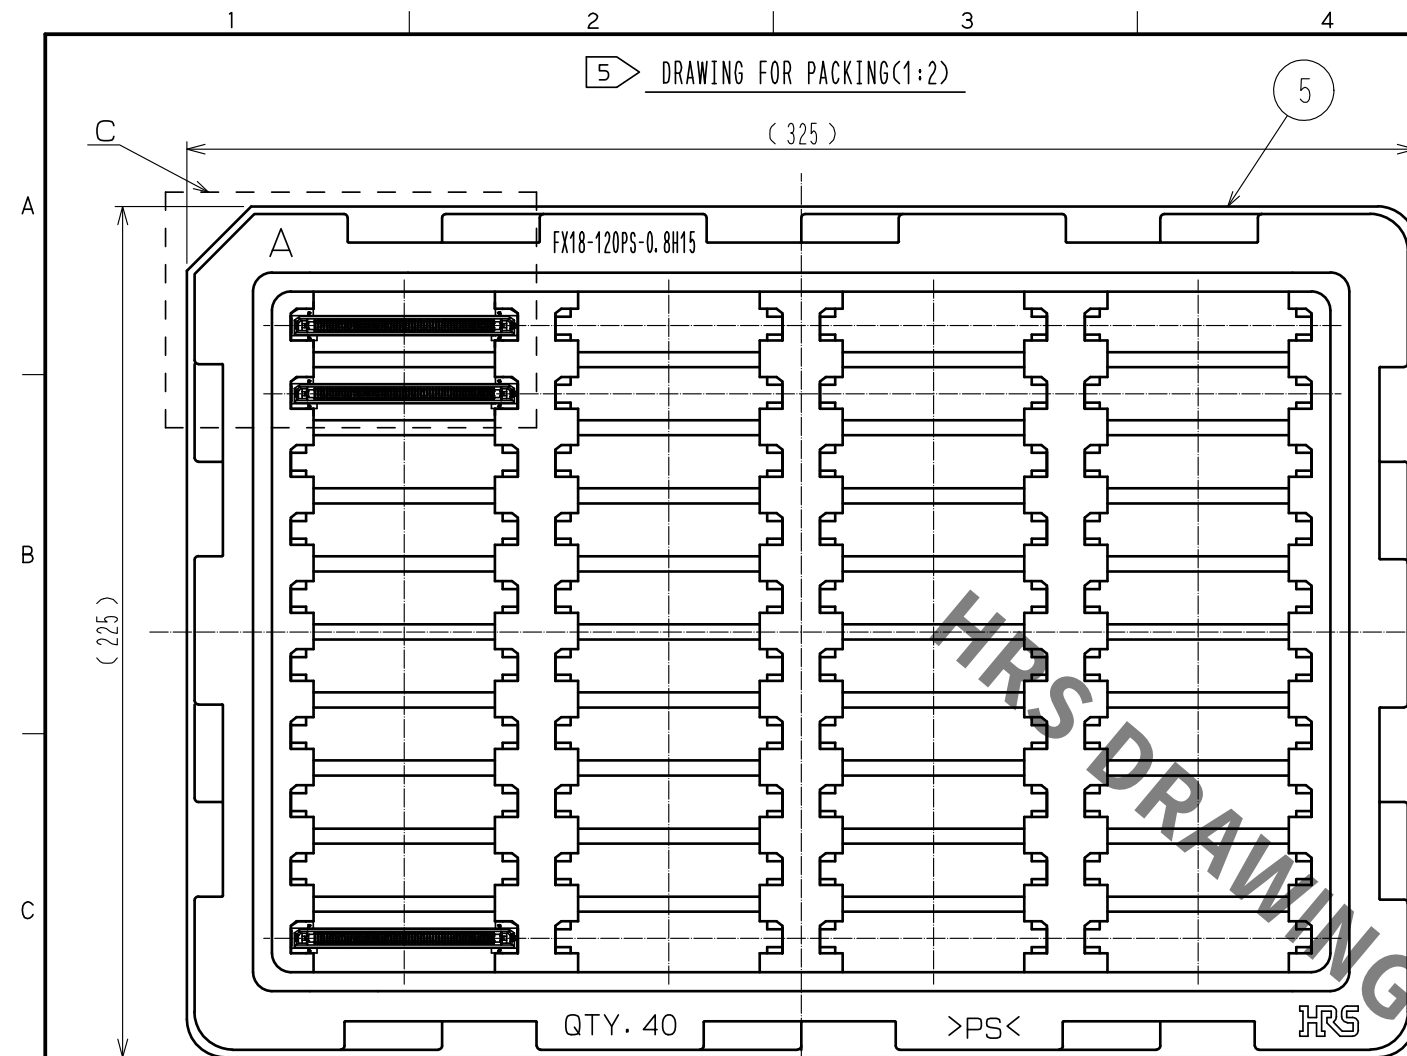


CROSS SECTION OF MATING(FREE)

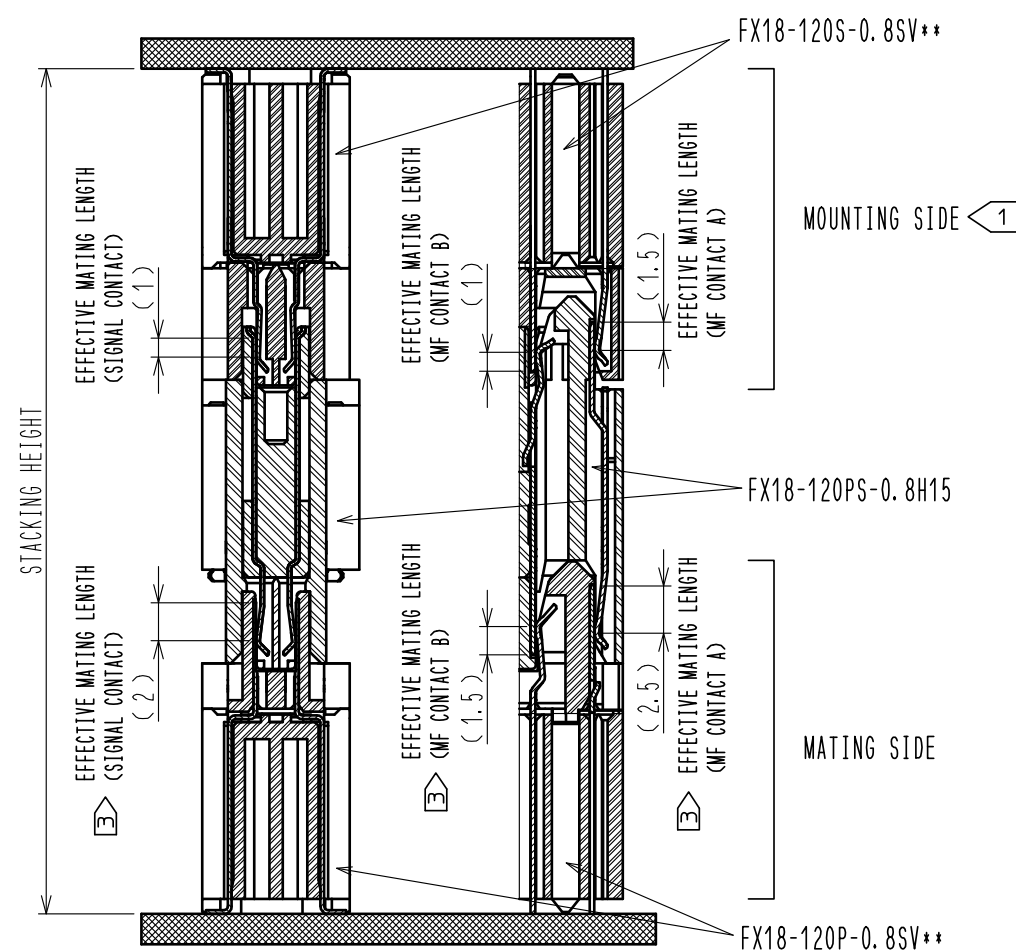

C (1 : 1)

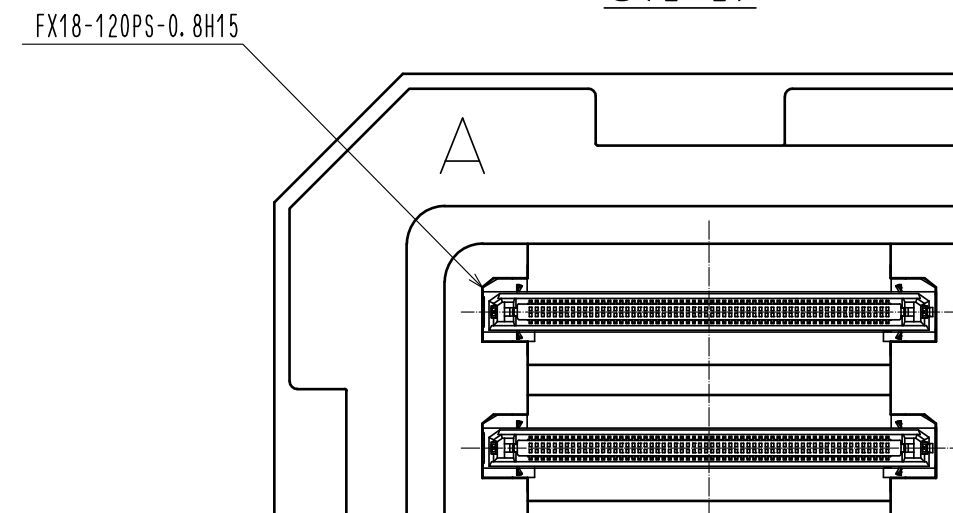

8 RECOMMENDED SPACER HEIGHT(FREE)

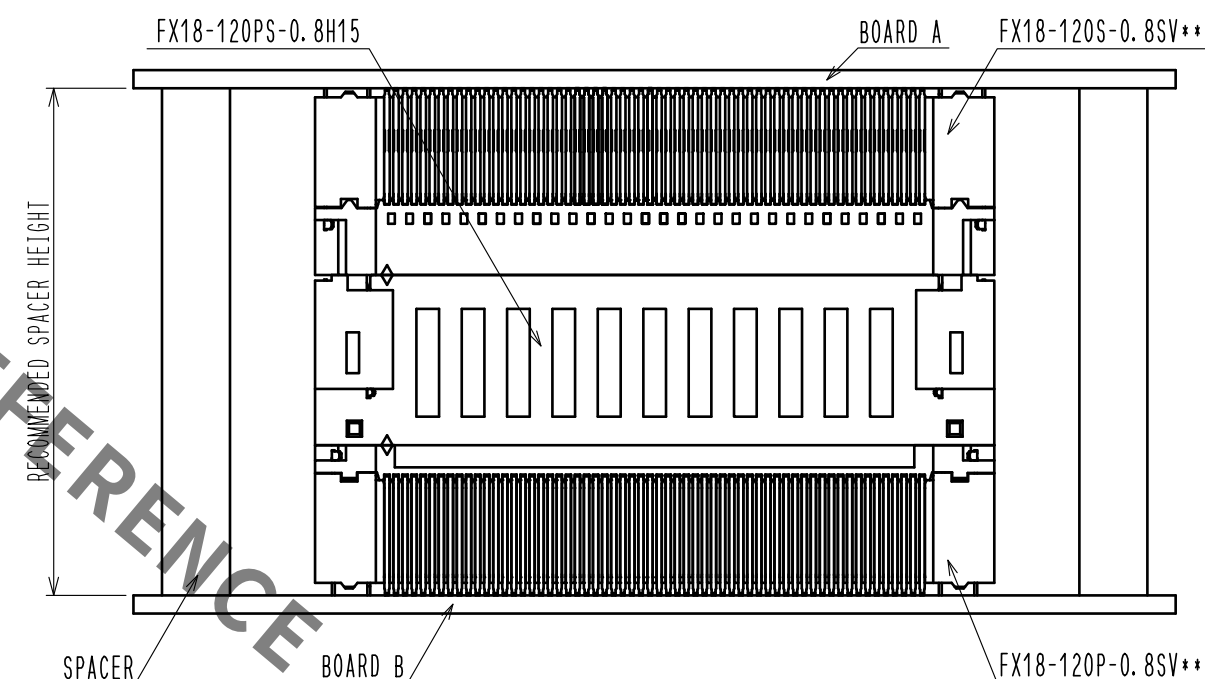

8 RECOMMENDED SPACER HEIGHT FOR EACH COMBINATION

STACKING HEIGHT	PLUG	INTERPOSER	RECEPTACLE	RECOMMENDED SPACER HEIGHT
25mm	FX18-120P-0.8SV	FX18-120PS-0.8H15	FX18-120S-0.8SV10	25.3±0.127
30mm	FX18-120P-0.8SV	FX18-120PS-0.8H15	FX18-120S-0.8SV15	30±0.127
35mm	FX18-120P-0.8SV	FX18-120PS-0.8H15	FX18-120S-0.8SV20	35±0.127
35mm	FX18-120P-0.8SV10	FX18-120PS-0.8H15	FX18-120S-0.8SV10	35.3±0.127
40mm	FX18-120P-0.8SV10	FX18-120PS-0.8H15	FX18-120S-0.8SV15	40±0.127
45mm	FX18-120P-0.8SV10	FX18-120PS-0.8H15	FX18-120S-0.8SV20	45±0.127

HR

DRAWING NO.	EDC-349365-00-00
PART NO.	FX18-120PS-0.8H15
CODE NO.	CL579-0053-6-00

2/2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX18-120PS-0.8H15](#)