
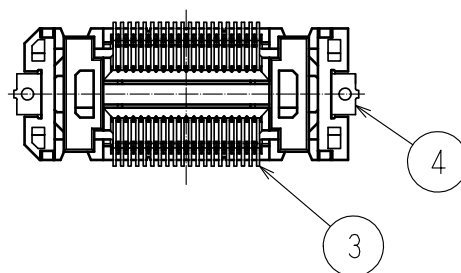
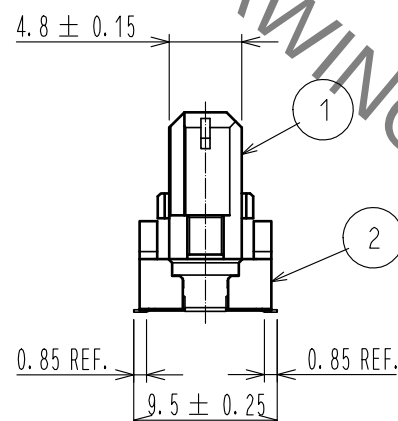
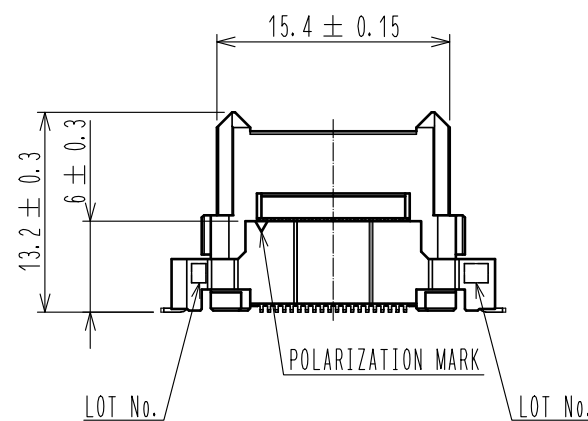
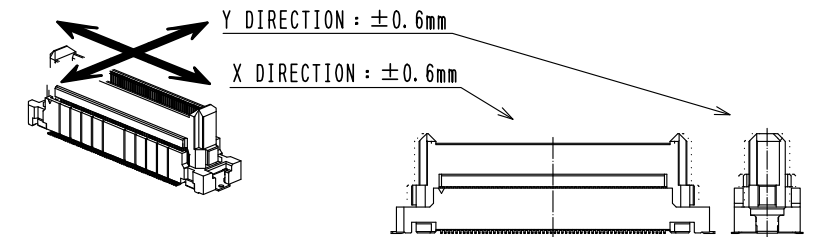
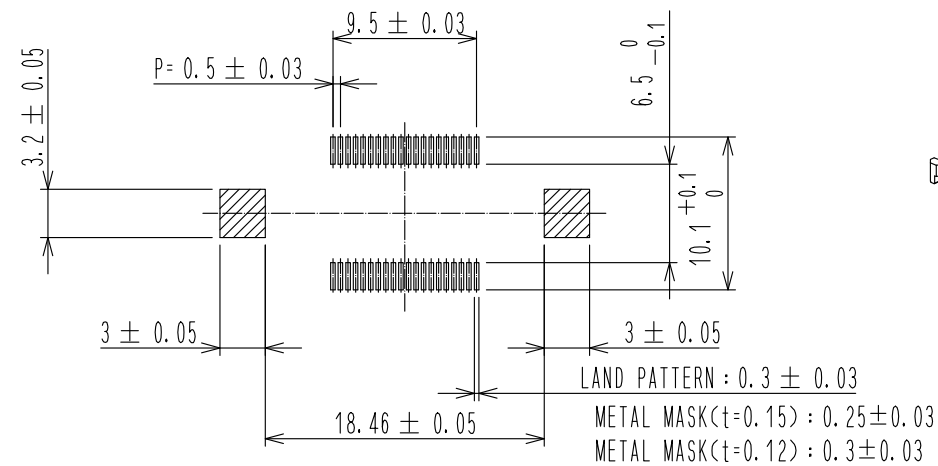



Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

RECOMMENDED LAND PATTERN DIMENSION OF PCB

3 FLOATING RANGE

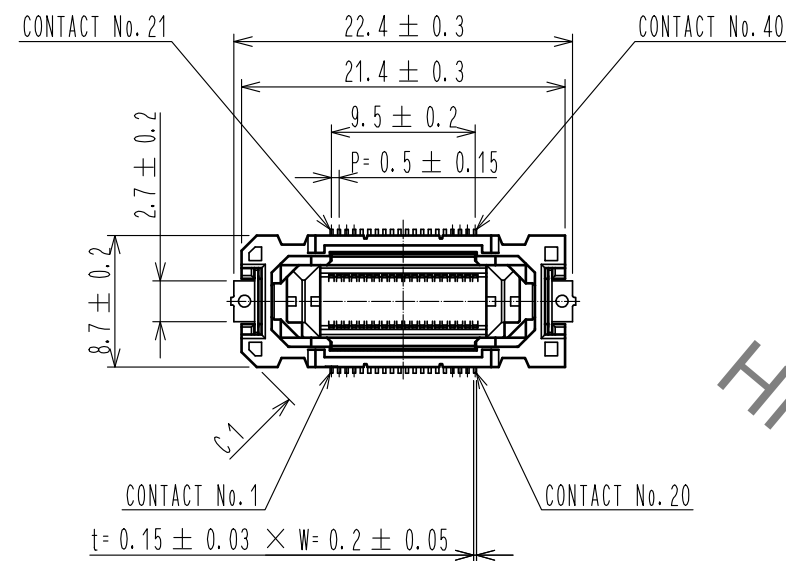

DRAWING FOR MATING: REFERENCES (FREE)

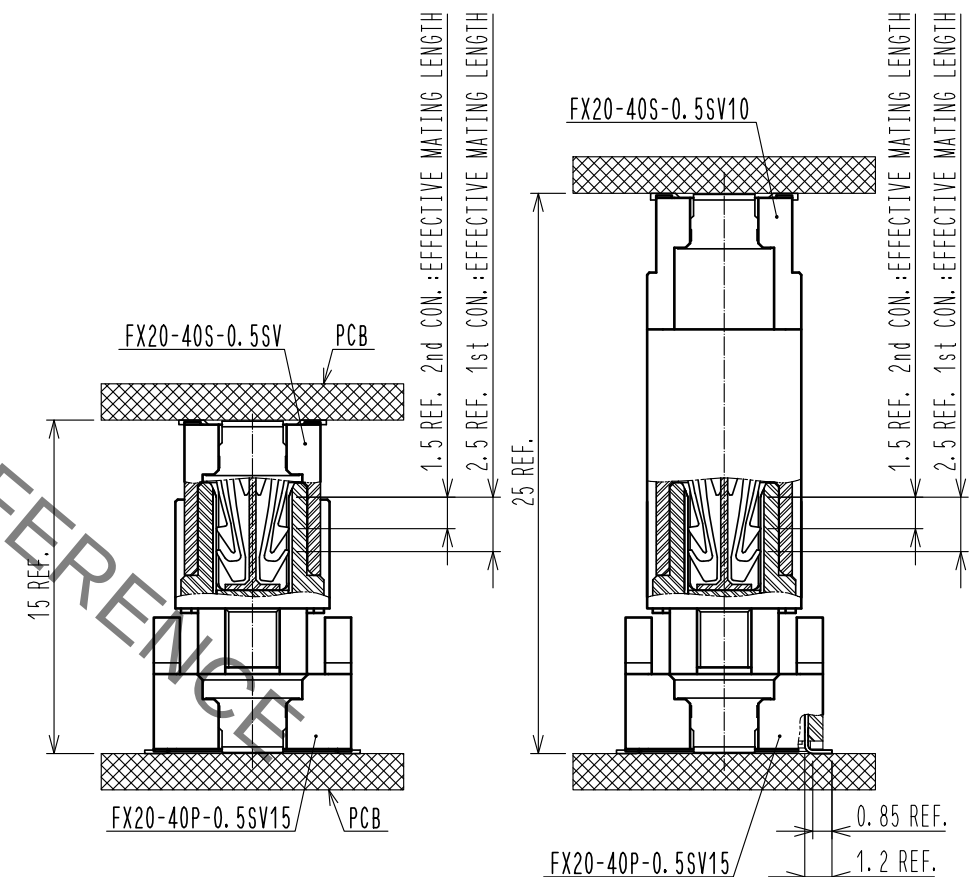


- NOTE
- 1 LEAD CO-PLANARITY IS 0.1mm MAX.
 - 2 THIS IS PACKAGED IN EMBOSSED CARRIER TAPE. (260 PCS/RL)
 - 3 FLOATING RANGE OF THIS CONNECTOR IS ±0.6mm MAX.
 - 4 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN' T AFFECT QUALITY LEVEL.
 - 5 PLEASE NOTE THAT EXCESSIVE WRENCHING FORCE COULD DAMAGE THIS CONNECTOR.
PLEASE REFER TO THE GUIDELINE FOR DETAILED REGULATIONS OF THE MATING METHOD.


2	POLYAMIDE	BLACK, UL94V-0	6	POLYESTER	CLEAR
1	POLYAMIDE	BLACK, UL94V-0	5	POLYSTYRENE	CLEAR
NO. MATERIAL FINISH, REMARKS			4	BRASS	TIN PLATING 1μm MIN
			3	COPPER ALLOY	CONTACT: GOLD PLATING 0.1μm MIN LEAD : GOLD PLATING 0.03μm MIN UNDER : NICKEL PLATING 1μm MIN
UNITS mm			NO. MATERIAL FINISH, REMARKS		
SCALE 2:1			DESIGNED		
COUNT			CHECKED		
DESCRIPTION OF REVISIONS			DATE		
APPROVED : HS. OKAWA			DRAWING NO. EDC-336319-20-00		
CHECKED : HT. YAMAGUCHI			PART NO. FX20-40P-0.5SV15(20)		
DESIGNED : MT. ITANO			CODE NO. CL570-1001-0-20		
DRAWN : MT. ITANO			1/2		

Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

2 DRAWING FOR PACKING

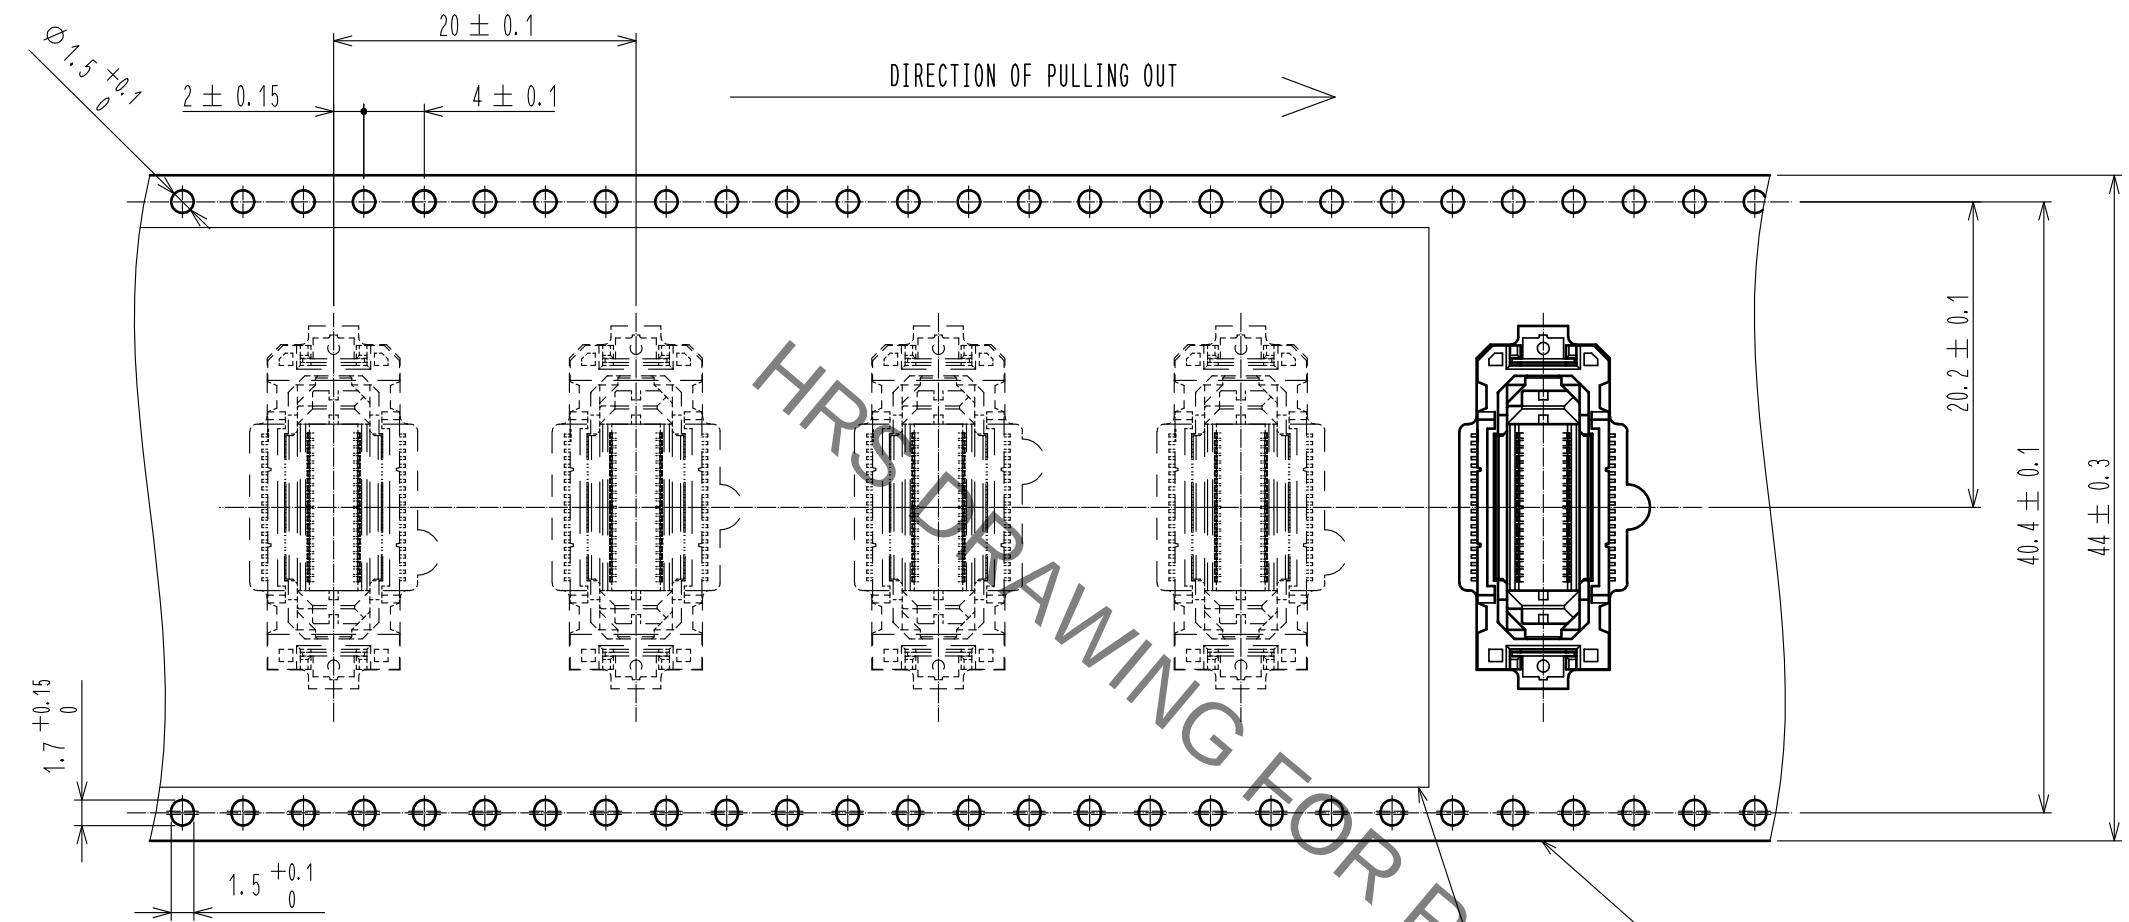

REELING CONDITION FOR DELIVERY(FREE)

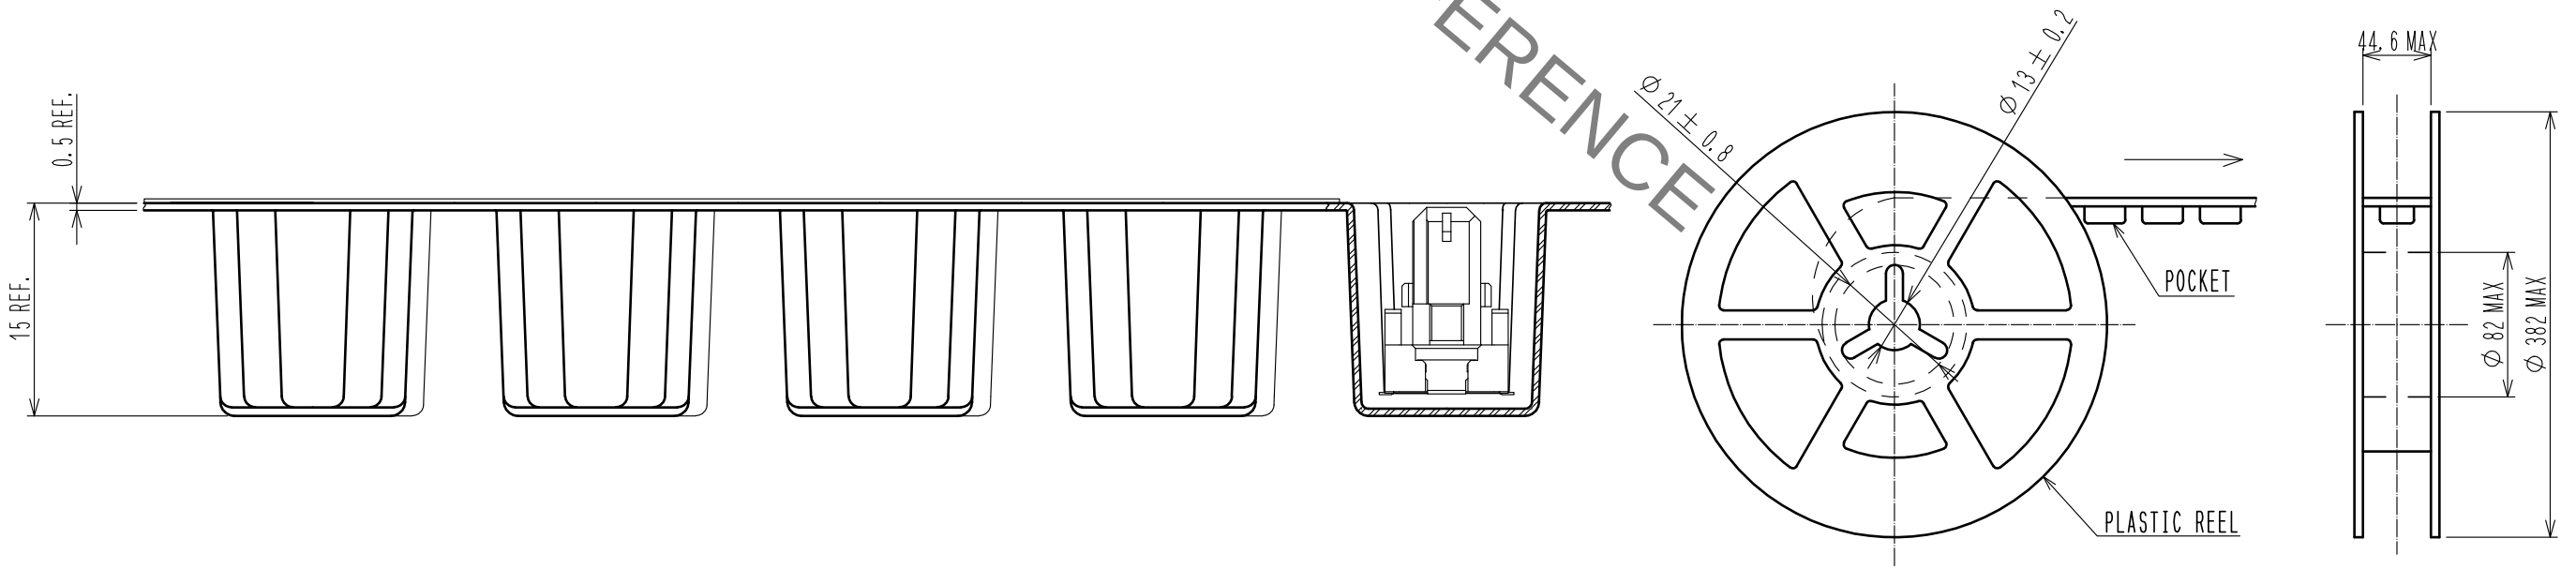

HRS	DRAWING NO.	EDC-336319-20-00
	PART NO.	FX20-40P-0.5SV15(20)
	CODE NO.	CL570-1001-0-20
		$\triangle$ 2/2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX20-40P-0.5SV15\(20\)](#)