

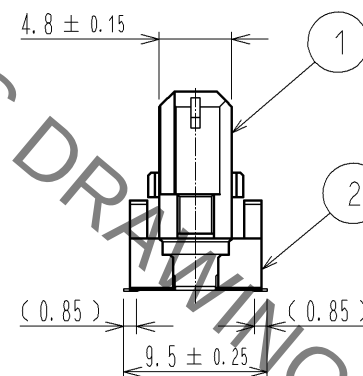
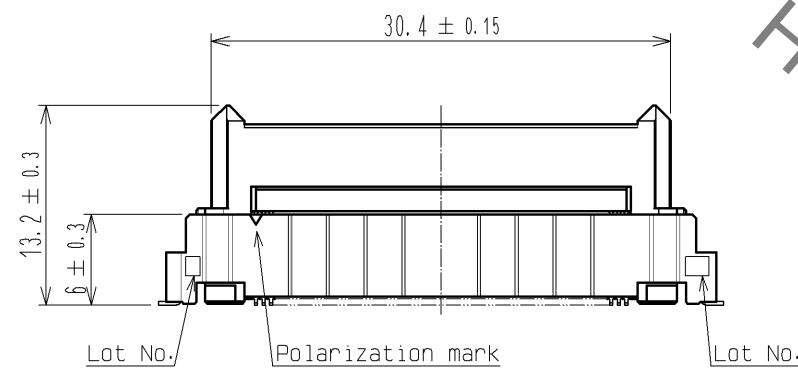
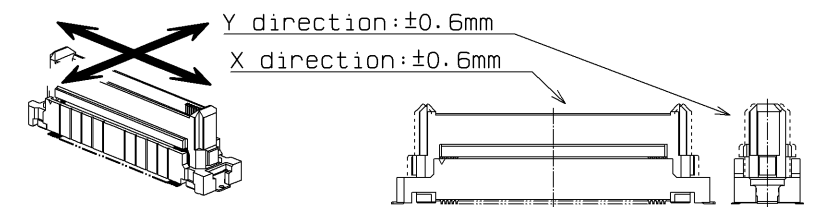
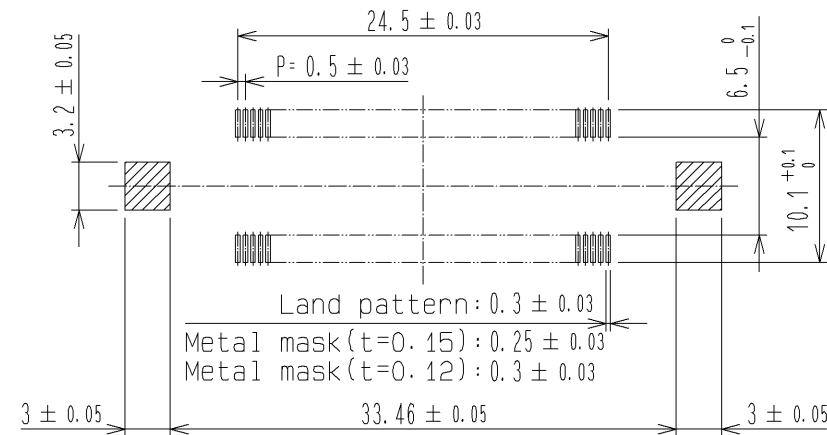


RECOMMENDED LAND PATTERN DIMENSION OF PCB


3> FLOATING RANGE

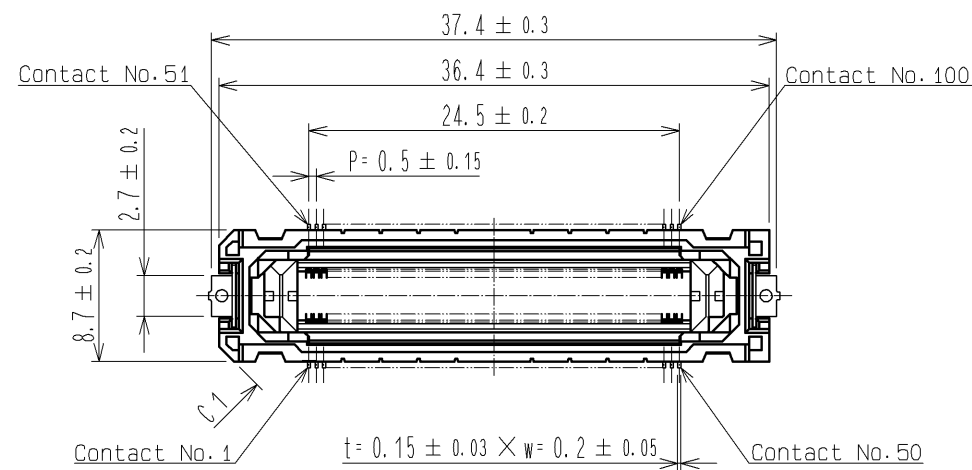


PCB DISTANCE (No scale)




CROSS SECTION OF MATING (No scale)




2> DRAWING FOR PACKING (No scale)

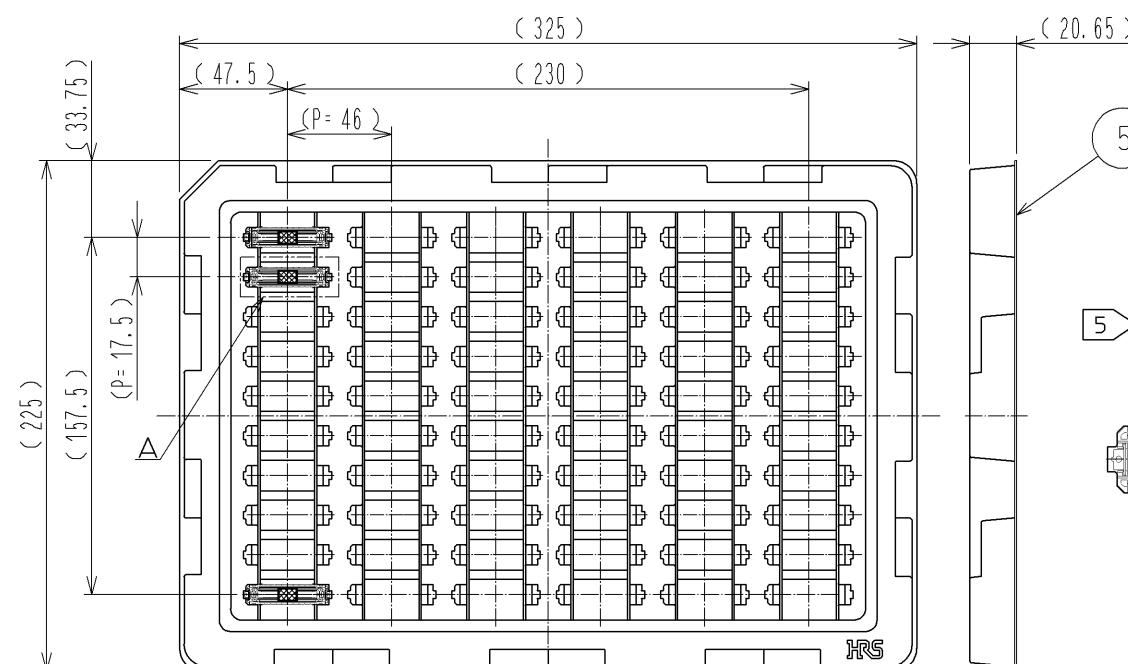

B (10 : 1)



A (1 : 1)

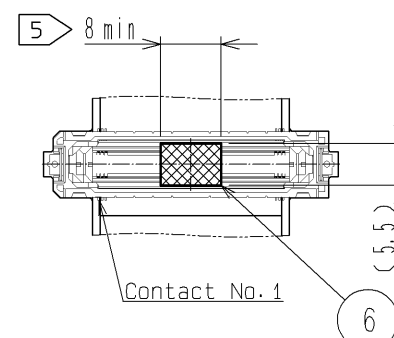

- 1 Lead CO-Planarity is 0.1mm MAX.
- 2 This is packaged in tray. (60pcs/tray)
- 3 Floating range of this connector is ±0.6mm MAX.
- 4 Blemish and hit mark can be occurred through out the manufacturing process which doesn't affect quality level.
- 5 It shows the vacuum pickup area. Remove the mylar tape before mating connectors.
- 6 Please note that excessive wrenching force could damage this connector.
Please refer to the guideline for detailed regulations of the mating method.
- 7 The dimensions in parentheses are for references.
- 8 Please use the connectors within the specified PCB distance.

				6	POLYIMIDE	(TAPE FOR VACUUM PICKUP)
				5	POLYSTYRENE	(TRAY)
				4	BRASS	TIN-PLATING 1 μm
2	POLYAMIDE	BLACK	UL94V-0	3	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μm
1	POLYAMIDE	BLACK	UL94V-0			LEAD AREA :GOLD 0.03 μm
						UNDER PLATING:NICKEL 1 μm
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE

	APPROVED : HS. OKAWA	14. 06. 09	DRAWING NO.	EDC3-336322-01	
	CHECKED : KN. SHIBUYA	14. 06. 09	PART NO.	FX20-100P-0. 5SV15(10)	
	DESIGNED : TS. OONO	14. 06. 09	CODE NO.	CL570-1004-9-10	
	DRAWN : TS. OONO	14. 06. 09			

HIROSE ELECTRIC CO., LTD.			1
---------------------------	--	--	---

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX20-100P-0.5SV15\(10\)](#)