





5 Recommended land pattern dimension of PCB

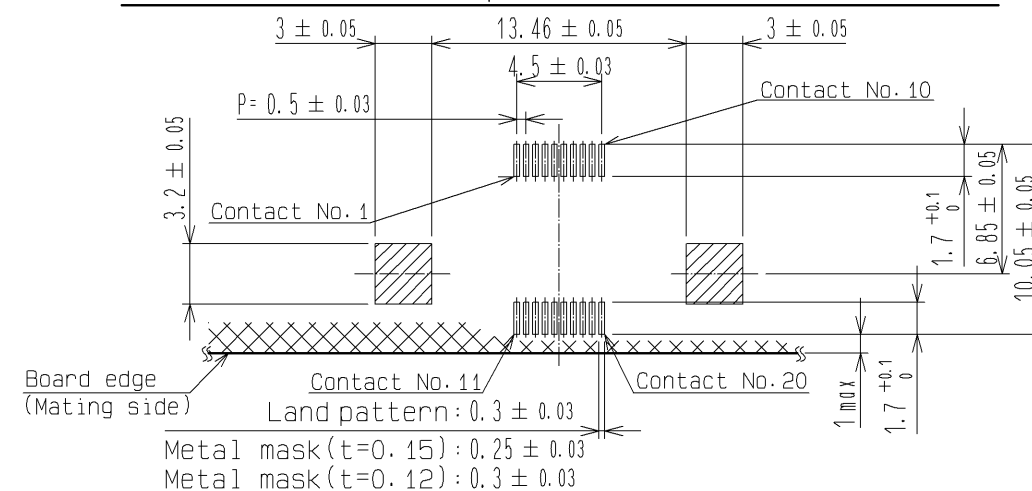


Drawing for mating(No scale)

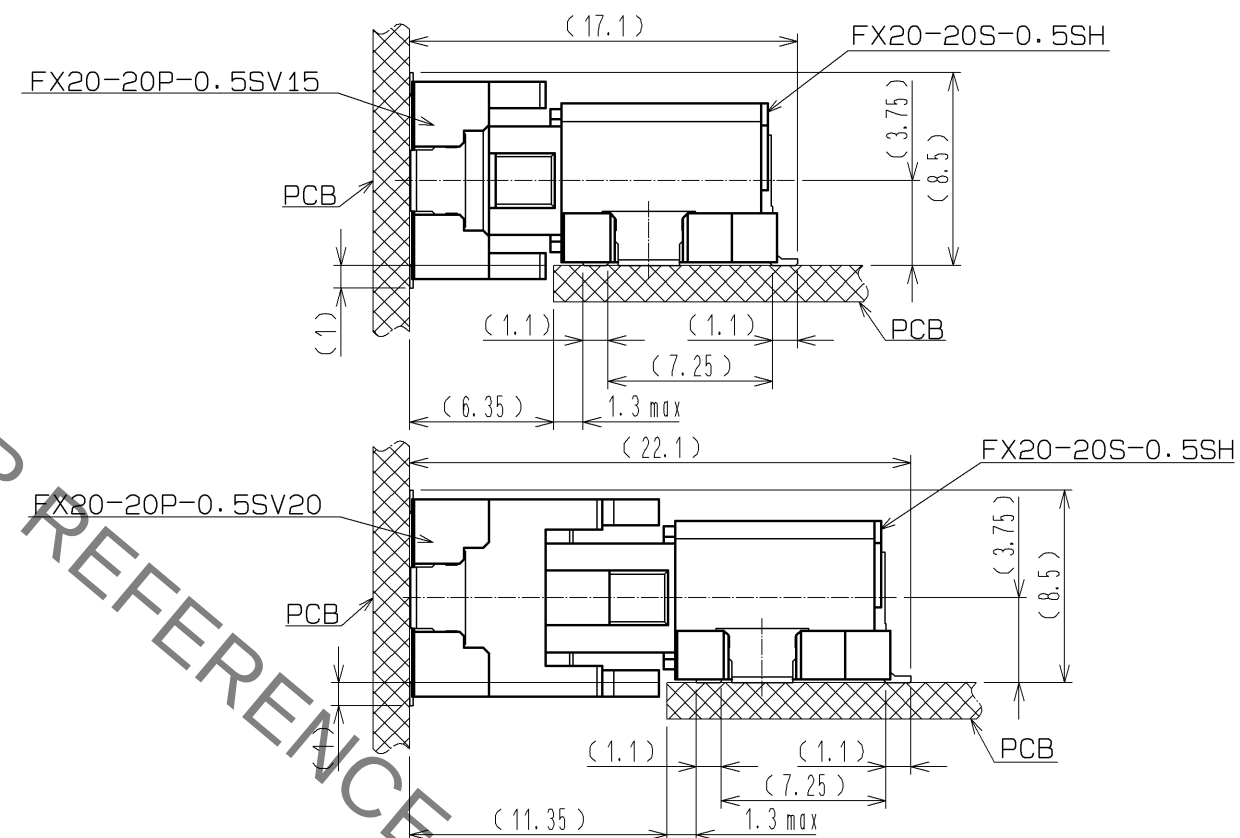

- 1 Lead CO-Planarity is 0.1mm MAX.
- 2 This is packaged in tray. (90pcs/tray)
- 3 Blemish and hit mark can be occurred through out the manufacturing process which dosen't affect quality level.
- 4 Please note that excessive wrenching force could damage this connector. Please refer to the guideline for detailed regulations of the mating method.
- 5 No prohibited area for printing pattern or via hole. PCB resist can be printed optionally.
- 6 The dimensions in parentheses are for references.

resist can be printed optionally.
dimensions in parentheses are for references.

				4	BRASS	TIN-PLATING 1 μm			
				2, 3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1 μm			
						LEAD AREA:GOLD 0.03 μm			
						UNDER PLATING:NICKEL 1 μm			
1	LCP	BLACK UL94V-0							
NO.	MATERIAL	FINISH . REMARKS			NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		13. 09. 25	DRAWING NO.		EDC3-350411-00		
		CHECKED : KI. HIROKAWA		13. 09. 25	PART NO.		FX20-20S-0. 5SH		
		DESIGNED : TS. OONO		13. 09. 25	CODE NO.		CL570-1611-1-00		
		DRAWN : TS. OONO		13. 09. 25					
								 	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX20-20S-0.5SH](#)