
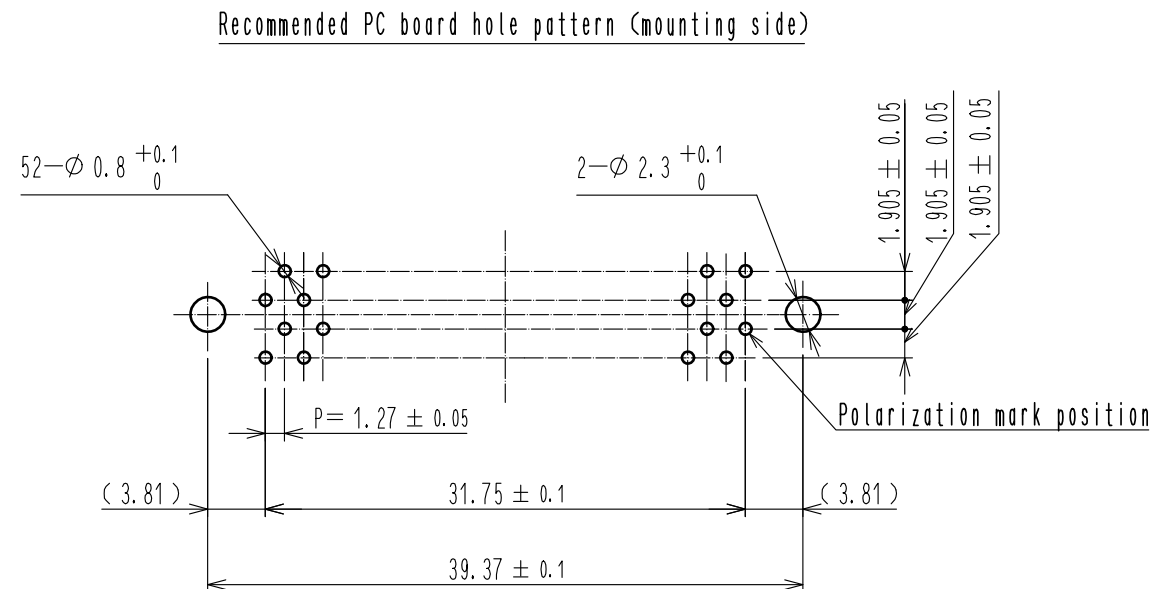
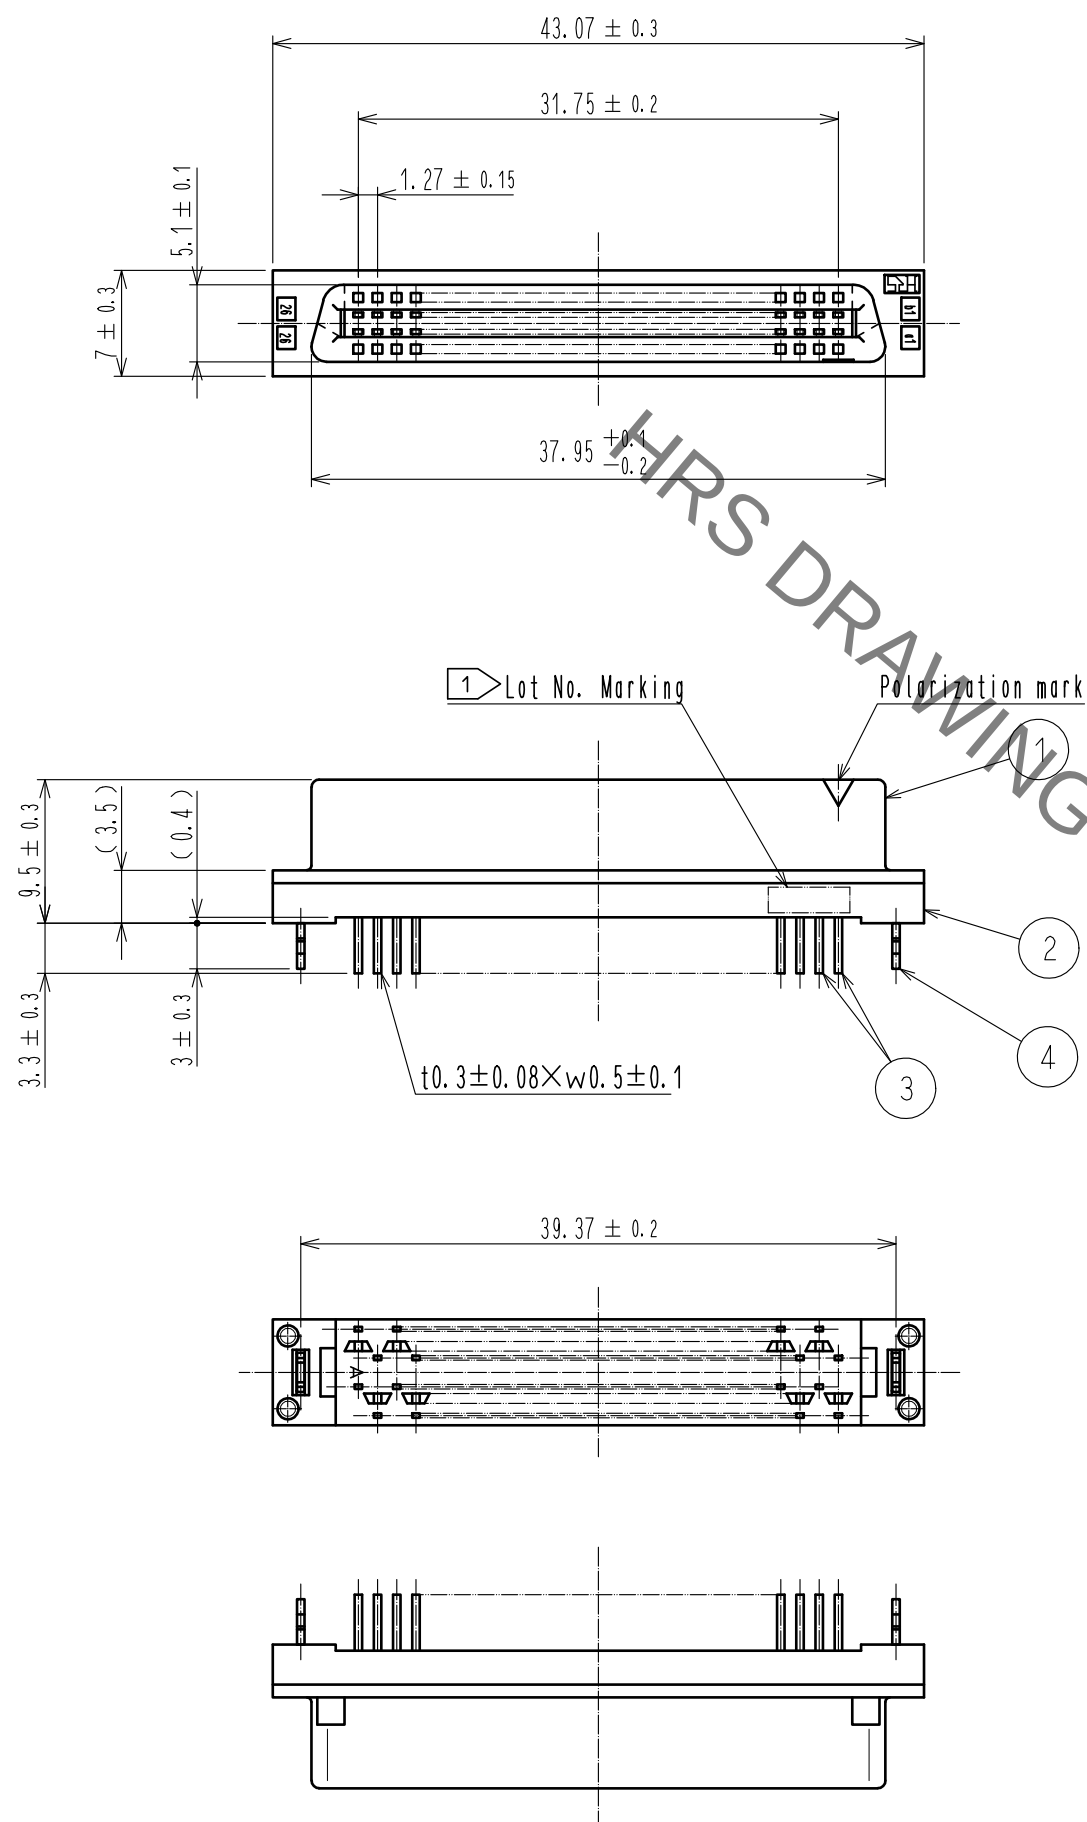



Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- Notes 1 Lot No. Marking position optional.
2 The dimensions in parentheses are for reference.

				4	PHOSPHOR BRONZE	Tin-Plating		
2	PBT	BLACK	UL94V—0	3	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min.		
1	PBT	BLACK	UL94V—0			Dip area : TIN-Plating 2μm min.		
						Under plating : Nickel 2μm min.		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 2 : 1		DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HT. YAMAGUCHI		18.06.25	DRAWING NO. EDC-155878-00-00			
		CHECKED : HT. YAMAGUCHI		18.06.25	PART NO. FX2CA-52SA-1.27DSAL			
		DESIGNED : MT. ITANO		18.06.25	CODE NO. CL572-1067-1-00			
		DRAWN : MK. OKI		18.06.21				
								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX2CA-52SA-1.27DSAL](#)