

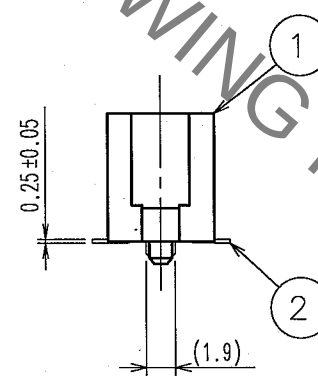
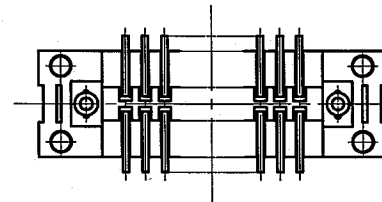
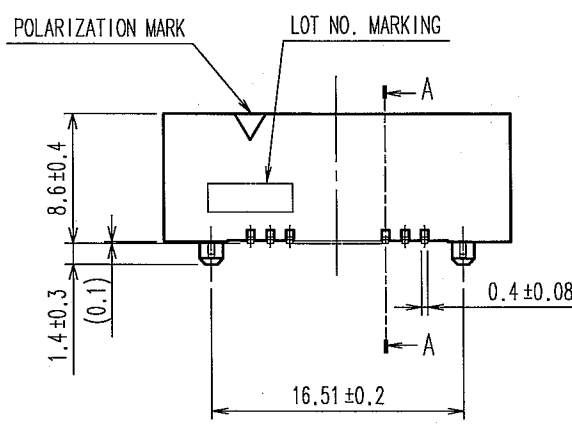
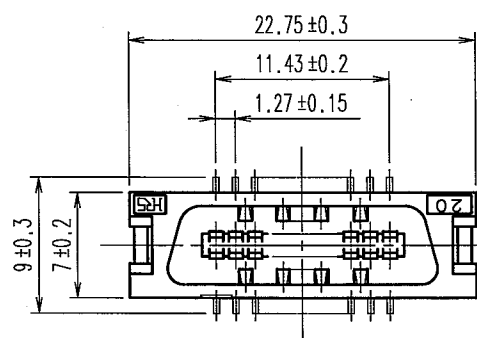


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO

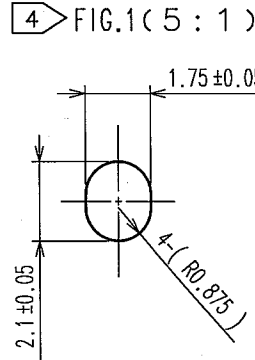

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

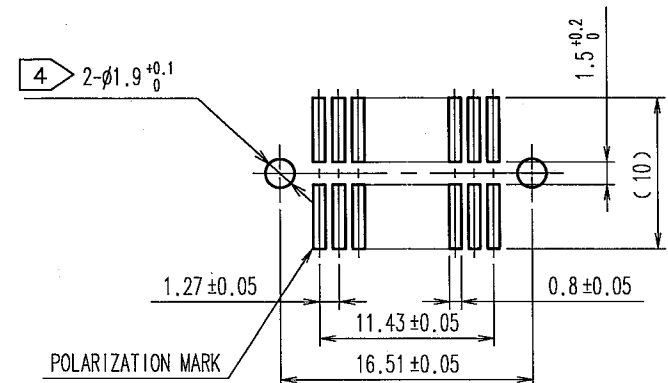


- NOTES
- 1 LEAD CO-PLANARITY SHALL BE 0.15 MAX.
 - 2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 3 EMBOSS CARRIER PACKINGS APPLIED TO THIS PRODUCT.
 - 4 IN CASE OF THE AUTOMATED MOUNTING, RECOMMENDED HOLE DIAMETER OF BOSS IS SHOWN IN FIG.1.

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μ m min. LEAD AREA:TIN-PLATING 2μ m min. UNDER PLATING:NICKEL 2μ m min.				
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS				
CODE NO. (OLD) CL			DRAWN A. SUZUKAWA 06.12.19			DESIGNED H. Okawa 06.12.19	CHECKED H. Okawa 06.12.19	APPROVED H. Okawa 06.12.19	RELEASED .
SCALE 2 : 1 UNITS mm			DRAWING NO. EDC3-082751-22 HRS HIROSE ELECTRIC CO., LTD			PART NO. FX2-20P-1.27SV(92) CODE NO. CL572-2001-9-92			1/2

Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
PCK

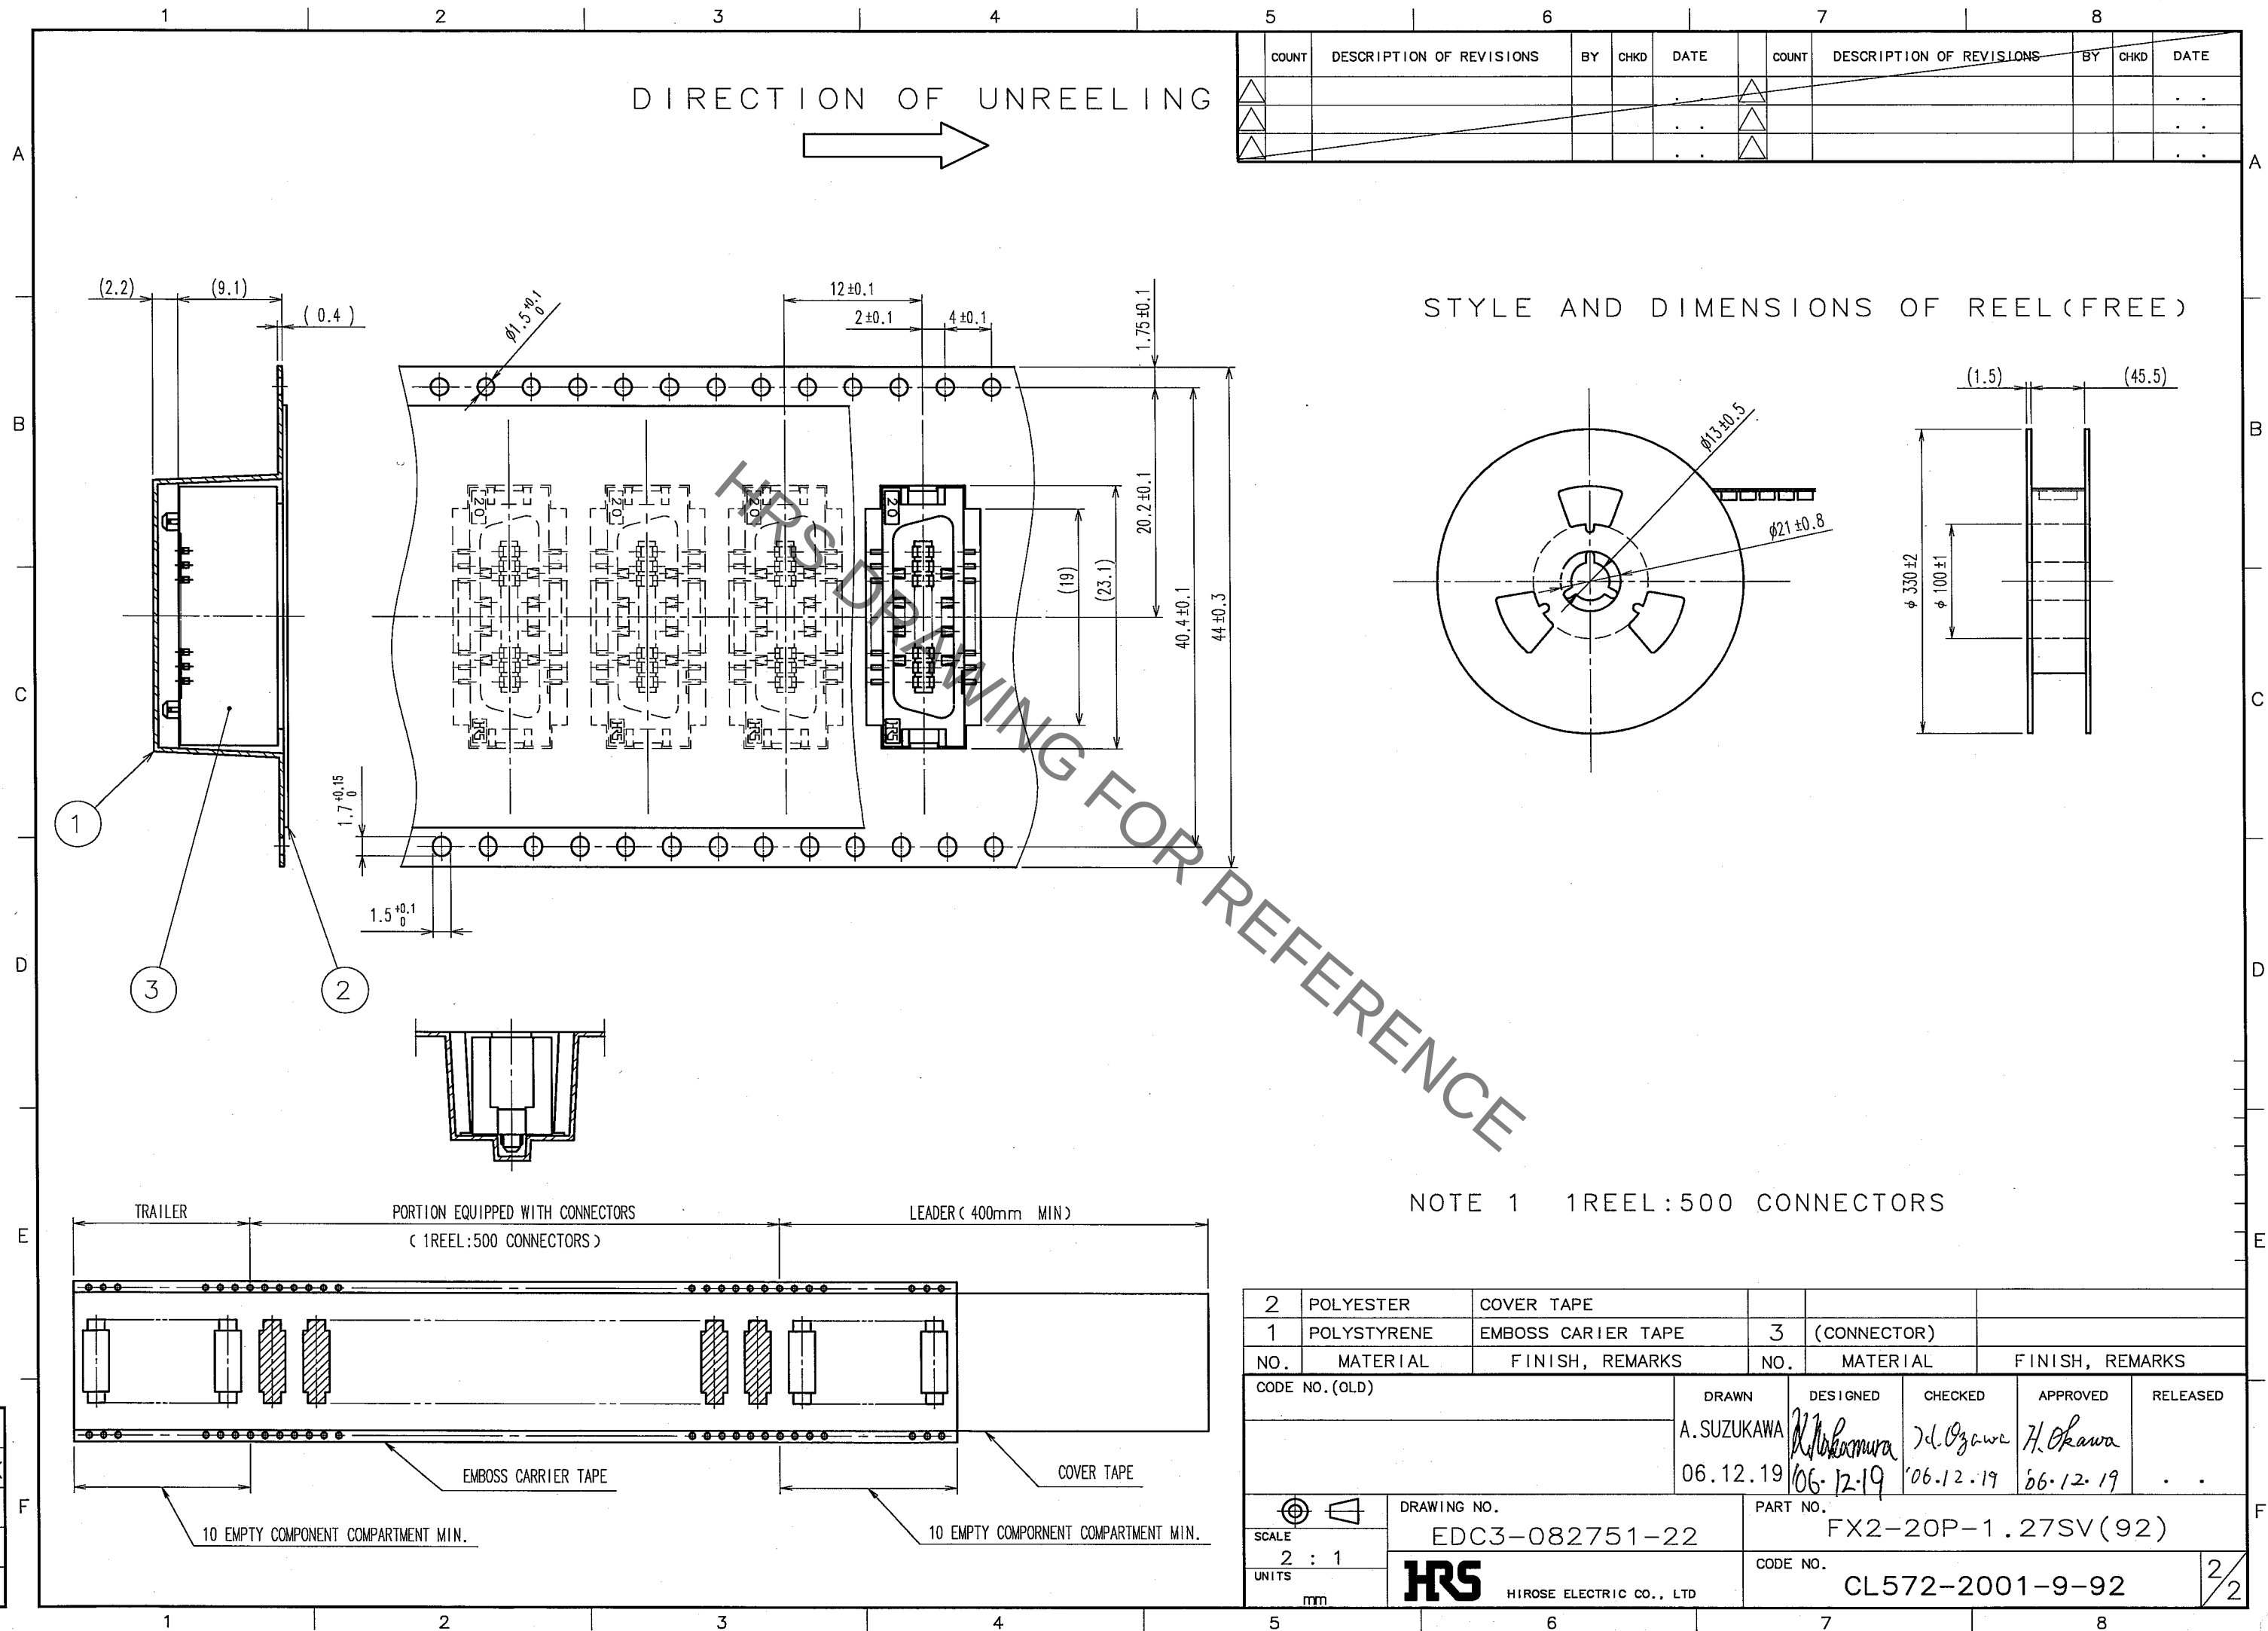

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX2-20P-1.27SV\(92\)](#)