


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

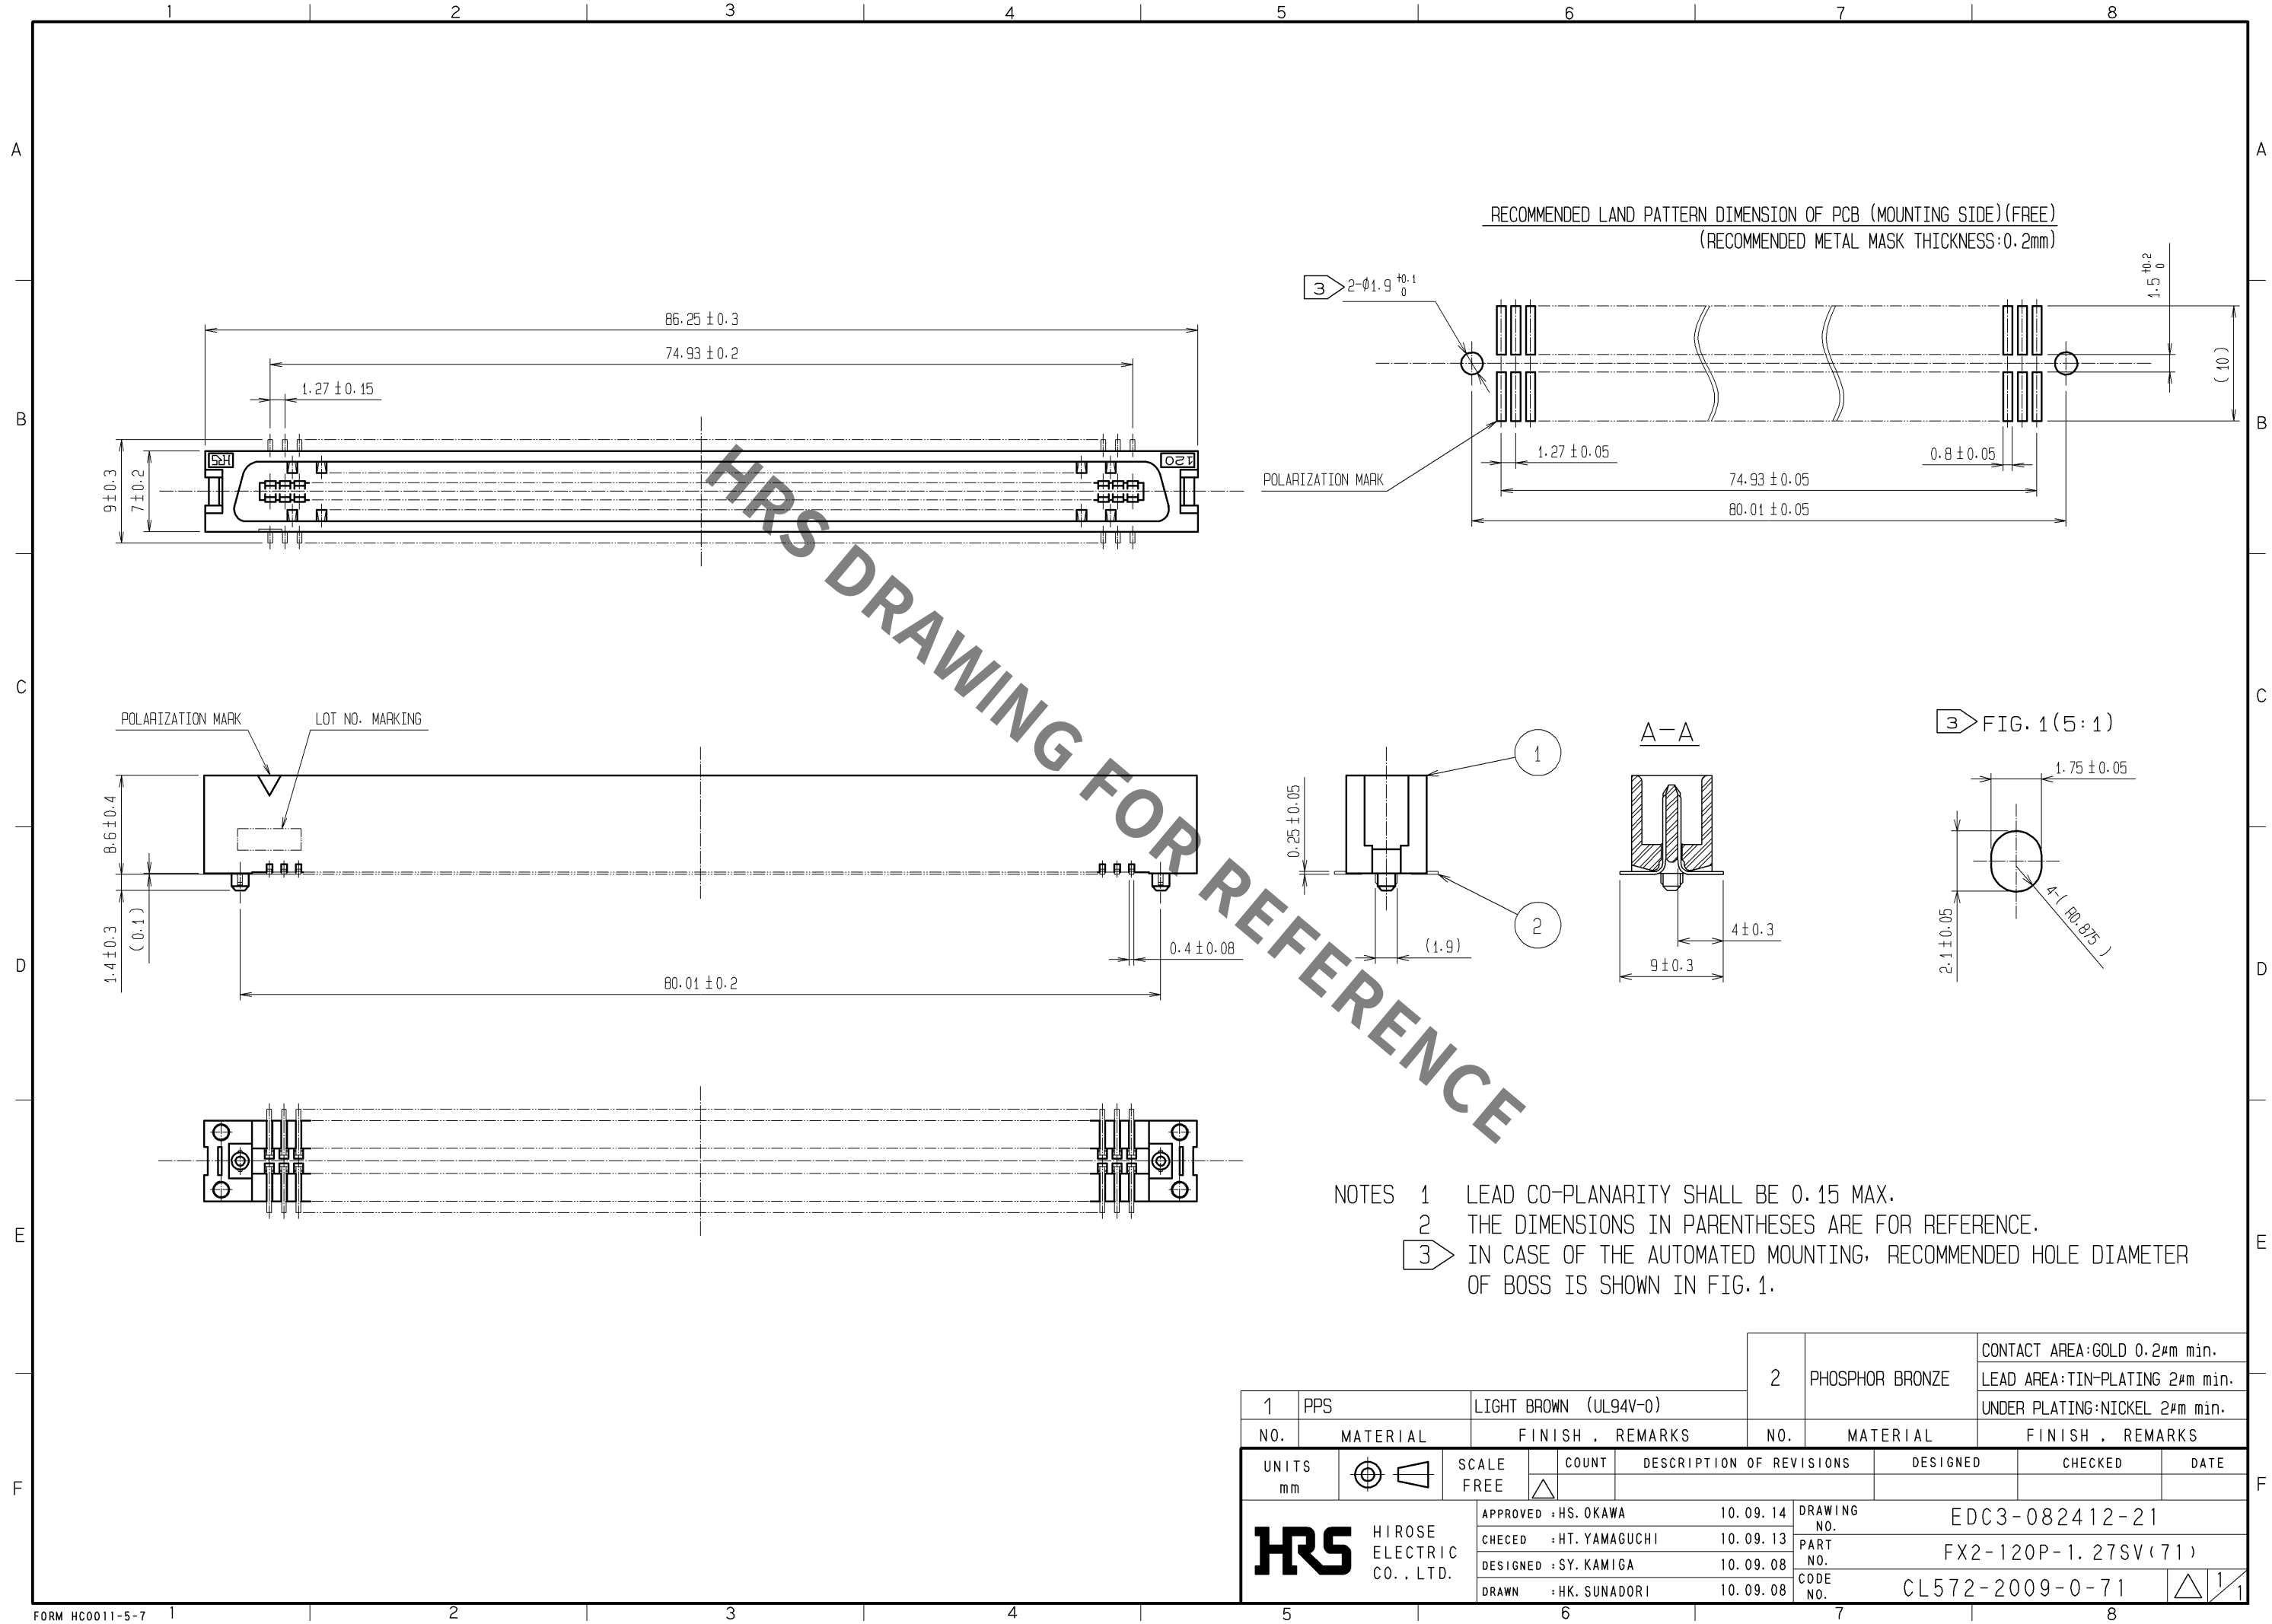

- NOTES 1 LEAD CO-PLANARITY SHALL BE 0.15 MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 IN CASE OF THE AUTOMATED MOUNTING, RECOMMENDED HOLE DIAMETER OF BOSS IS SHOWN IN FIG.1.

					2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μm min.				
							LEAD AREA:TIN-PLATING 2μm min.				
							UNDER PLATING:NICKEL 2μm min.				
1	PPS	LIGHT BROWN (UL94V-0)									
NO.		MATERIAL		FINISH , REMARKS		NO.	MATERIAL		FINISH , REMARKS		
UNITS mm				SCALE FREE		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO. , LTD.		APPROVED : HS. OKAWA				10. 09. 14	DRAWING NO. EDC3-082412-21				
		CHECED : HT. YAMAGUCHI				10. 09. 13	PART NO. FX2-120P-1. 27SV (71)				
		DESIGNED : SY. KAMIGA				10. 09. 08	CODE NO.				
		DRAWN : HK. SUNADORI				10. 09. 08	CL572-2009-0-71				
							 1/1				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX2-120P-1.27SV\(71\)](#)