

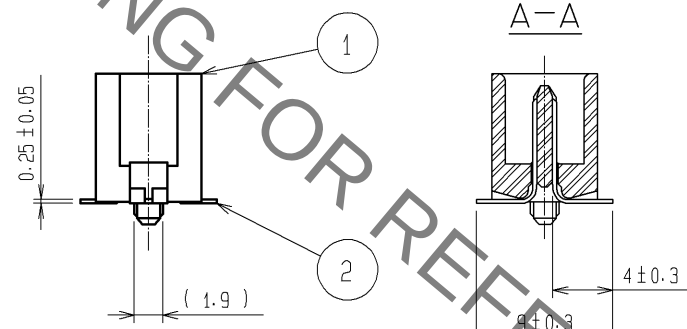
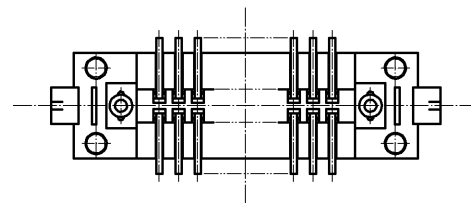
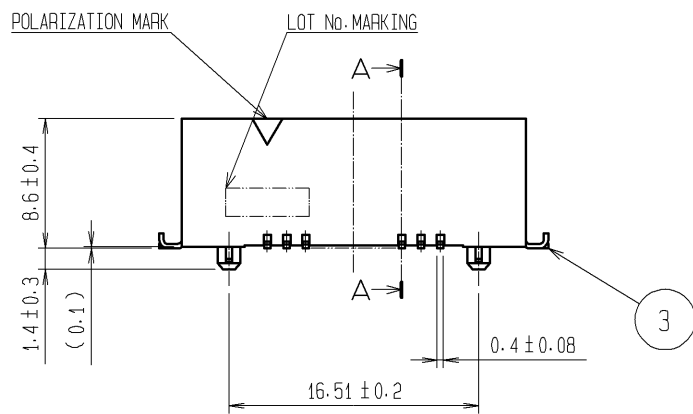



Aug.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

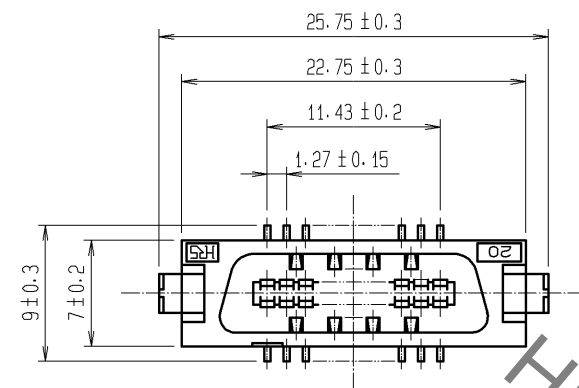


RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS:0.2mm)

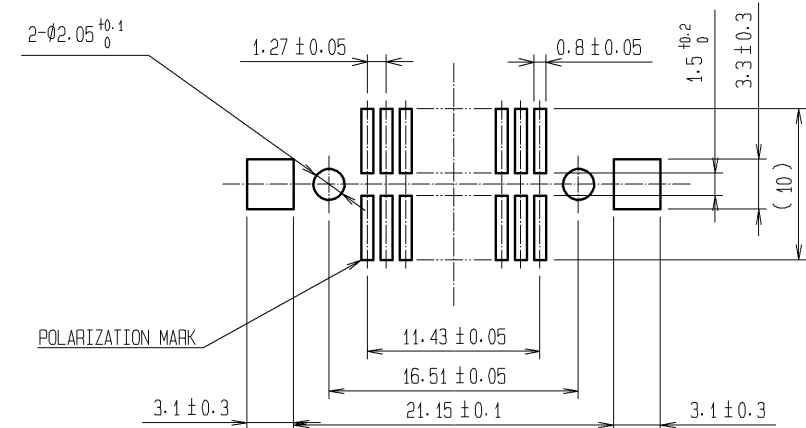

- NOTE 1 LEAD CO-PLANARITY SHALL BE 0.15mm MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 TRAY PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μm min.							
		LEAD AREA:TIN-PLATING 2μm min.							
		UNDER PLATING:NICKEL 2μm min.		4	PS	TRAY			
1	PPS	LIGHT BROWN (UL94V-0)		3	BRASS	TIN-PLATING			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm			SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.			APPROVED : HS. OKAWA		11. 06. 22	DRAWING NO. EDC3-082752-25			
			CHECKED : HT. YAMAGUCHI		11. 06. 22	PART NO. FX2-20P-1. 27SVL(95)			
			DESIGNED : SY. KAMIGA		11. 06. 22	CODE NO. CL572-2051-7-95			
			DRAWN : HK. SUNADORI		11. 06. 21	 1/2			

Aug.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

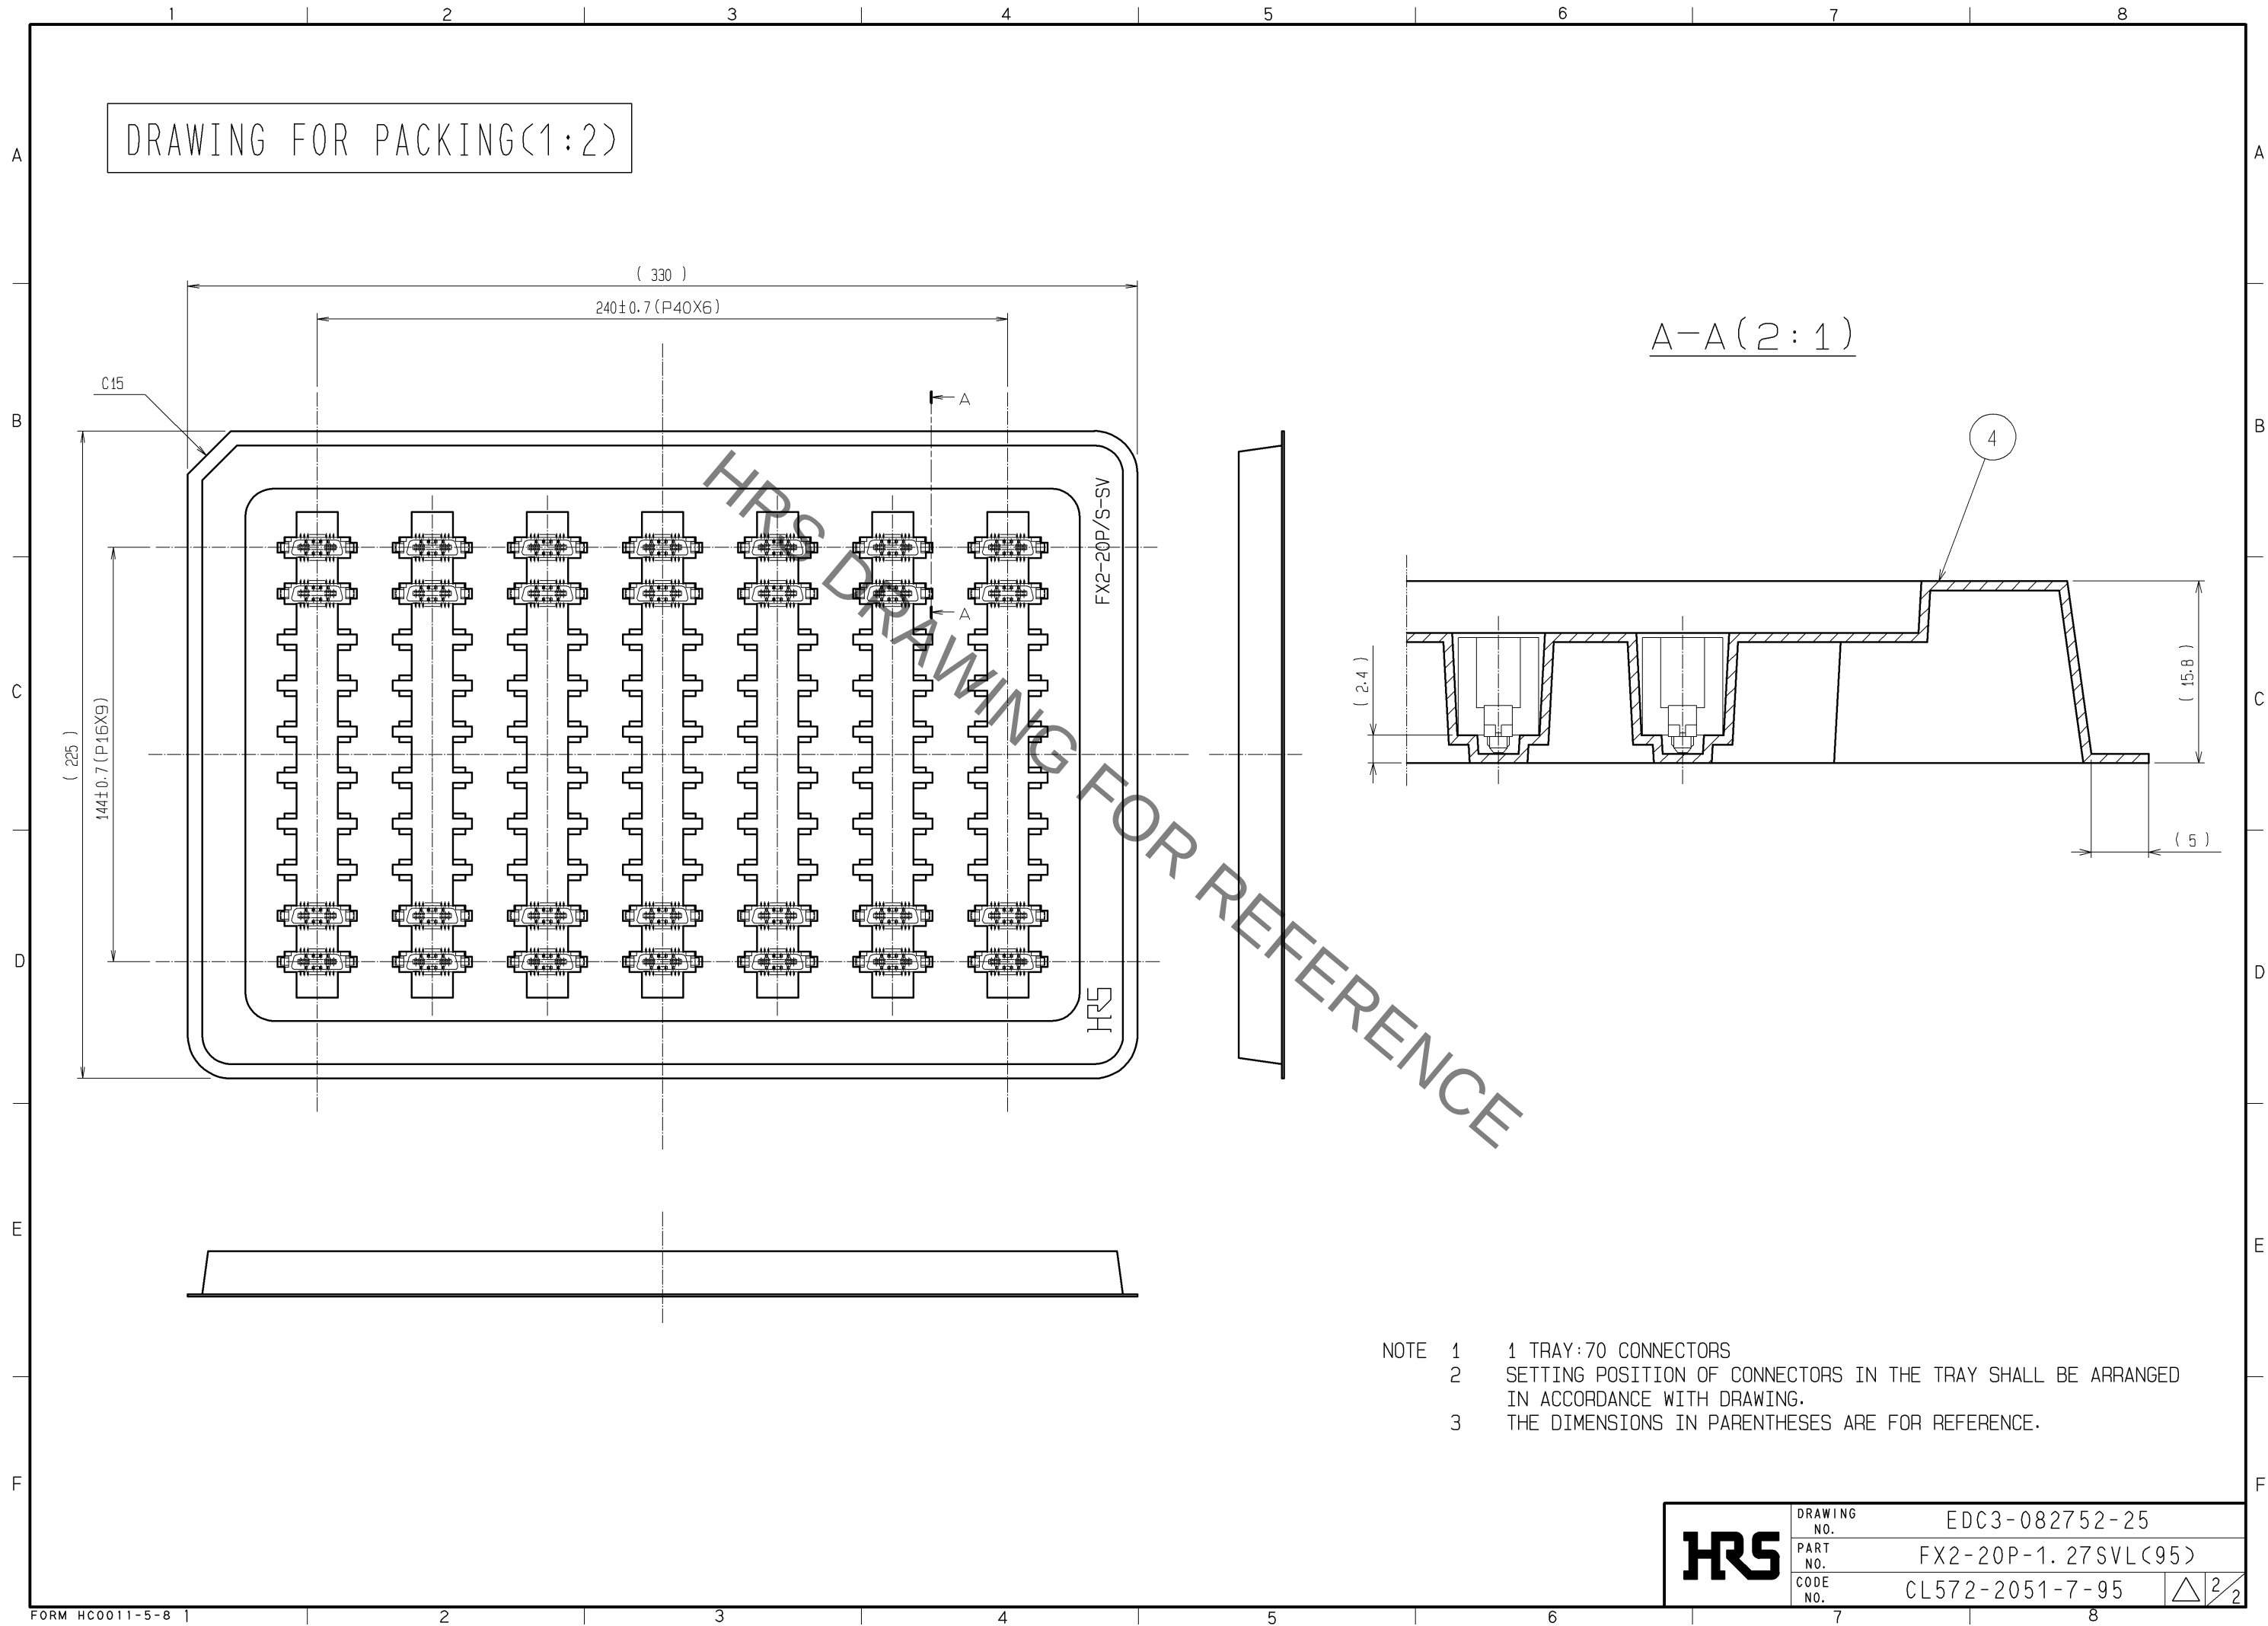

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX2-20P-1.27SVL\(95\)](#)