
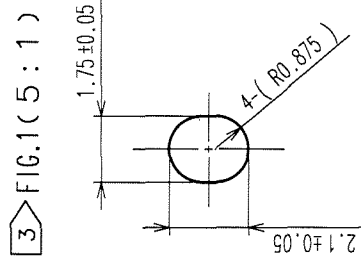
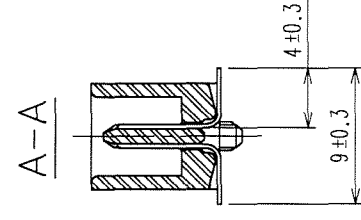
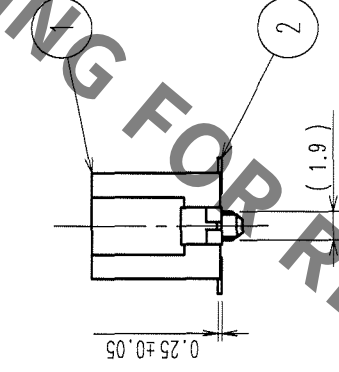
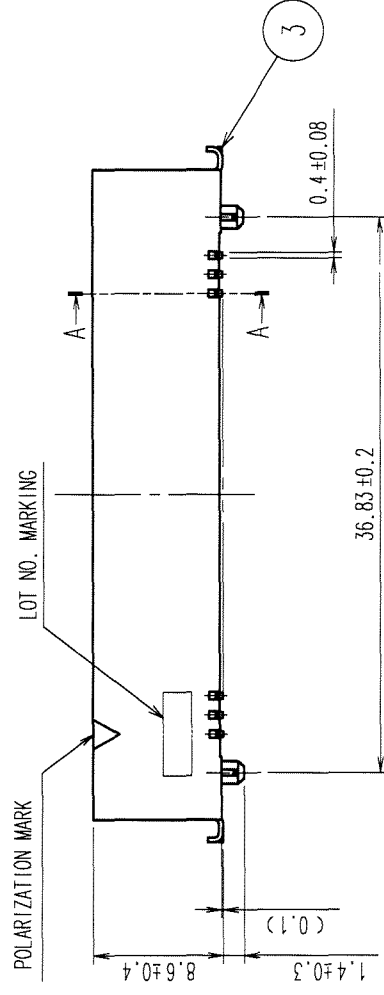
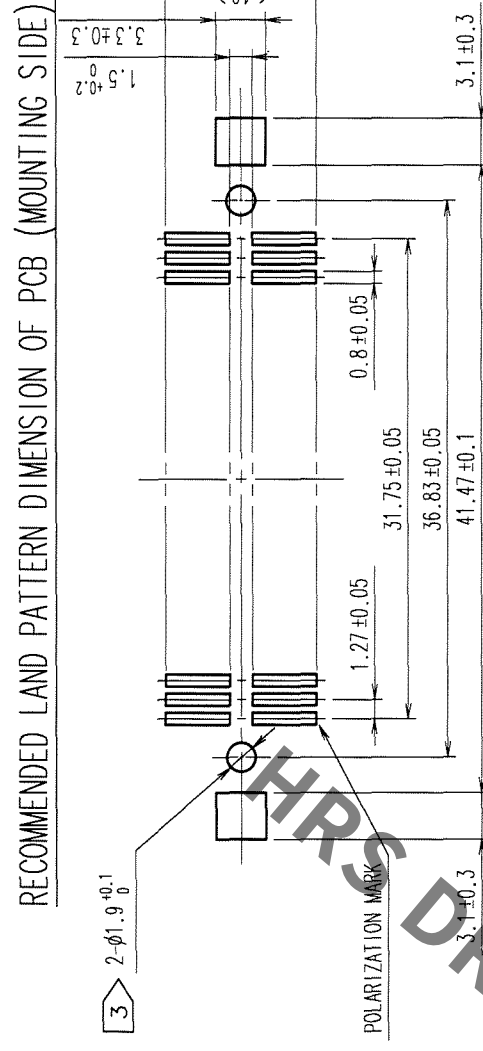


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
	△				• •	△				• •
	△				• •	△				• •
	△				• •	△				• •

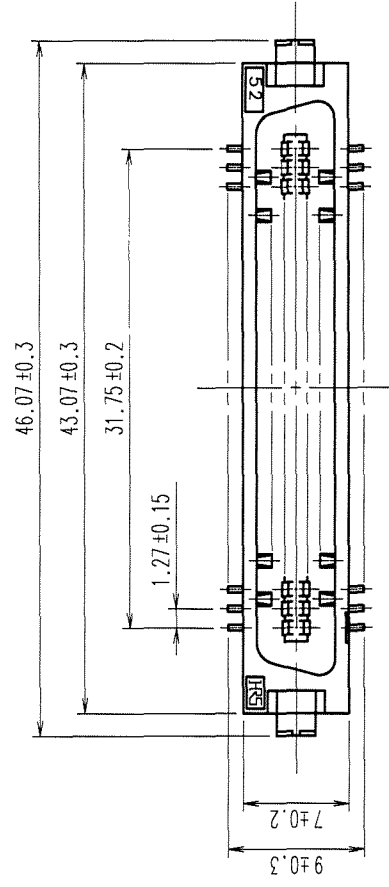

NOTES 1 LEAD CO-PLANARITY SHALL BE 0.15 MAX.

2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3 IN CASE OF THE AUTOMATED MOUNTING, RECOMMENDED HOLE DIAMETER OF BOSS IS SHOWN IN FIG.1.

3	BRASS	TIN-PLATING	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.2μm min.
1	PPS	LIGHT BROWN (UL94V-0)			LEAD AREA: TIN-PLATING 2μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	UNDER PLATING: NICKEL 2μm min.
CODE NO. (OLD)			FINISH, REMARKS		
CL			DRAWN	DESIGNED	CHECKED
			A. SUZUKAWA	<i>M. Nakamura</i>	<i>K. Ogawa</i>
			06.02.08	06.02.13	06.02.13
DRAWING NO.			PART NO.		
EDC3-082403-21			FX2-52P-1.27SVL(71)		
SCALE			CODE NO.		
2 : 1			CL572-2054-5-71		
UNITS			1		
HRS			1		
HIROSE ELECTRIC CO., LTD					
UNIT					

TO	PCK		
----	-----	--	--

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX2-52P-1.27SVL\(71\)](#)