

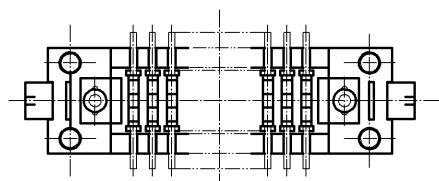
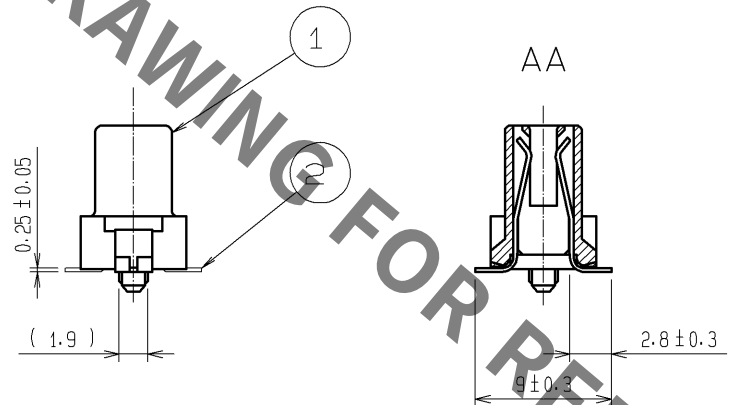
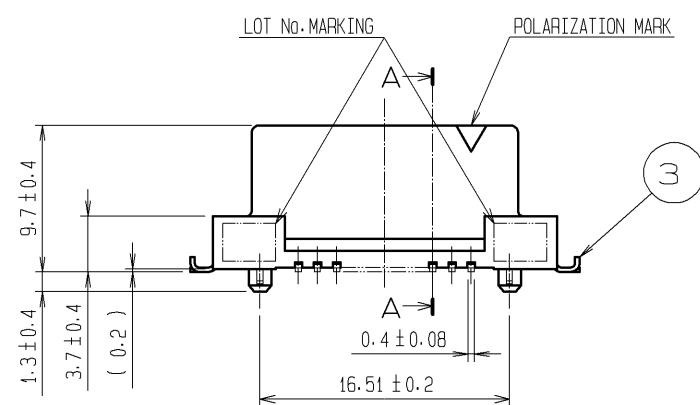


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

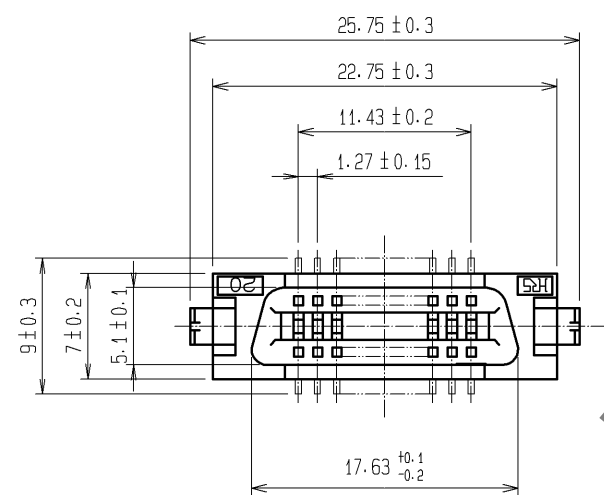


RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS: 0.2mm)

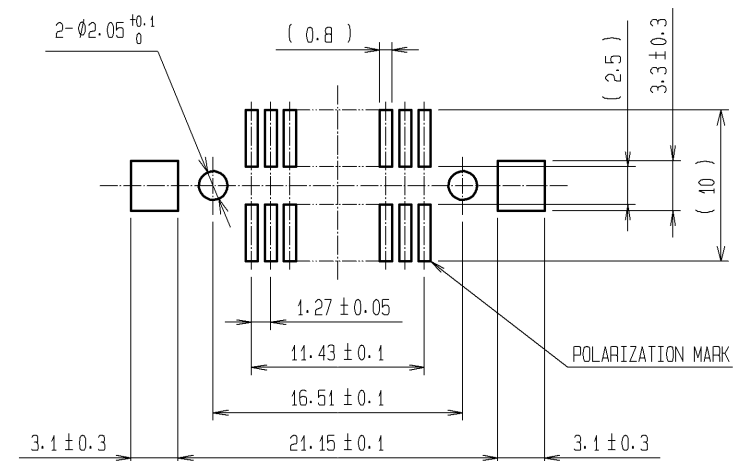

- NOTE 1 LEAD CO-PLANARITY SHALL BE 0.15mm MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 TRAY PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.

2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.2µm min.							
		LEAD AREA: TIN-PLATING 2µm min.							
		UNDER PLATING: NICKEL 1.5µm min.	4	PS		TRAY			
1	PPS	LIGHT BROWN (UL94V-0)	3	BRASS		TIN-PLATING			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL		FINISH . REMARKS			
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS			DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	11.06.22	DRAWING NO. EDC3-082756-25					
		CHECKED : HT. YAMAGUCHI	11.06.22	PART NO. FX2-20S-1.27SVL(95)					
		DESIGNED : SY. KAMIGA	11.06.22	CODE NO. CL572-2151-1-95					
		DRAWN : HK. SUNADORI	11.06.21						

Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

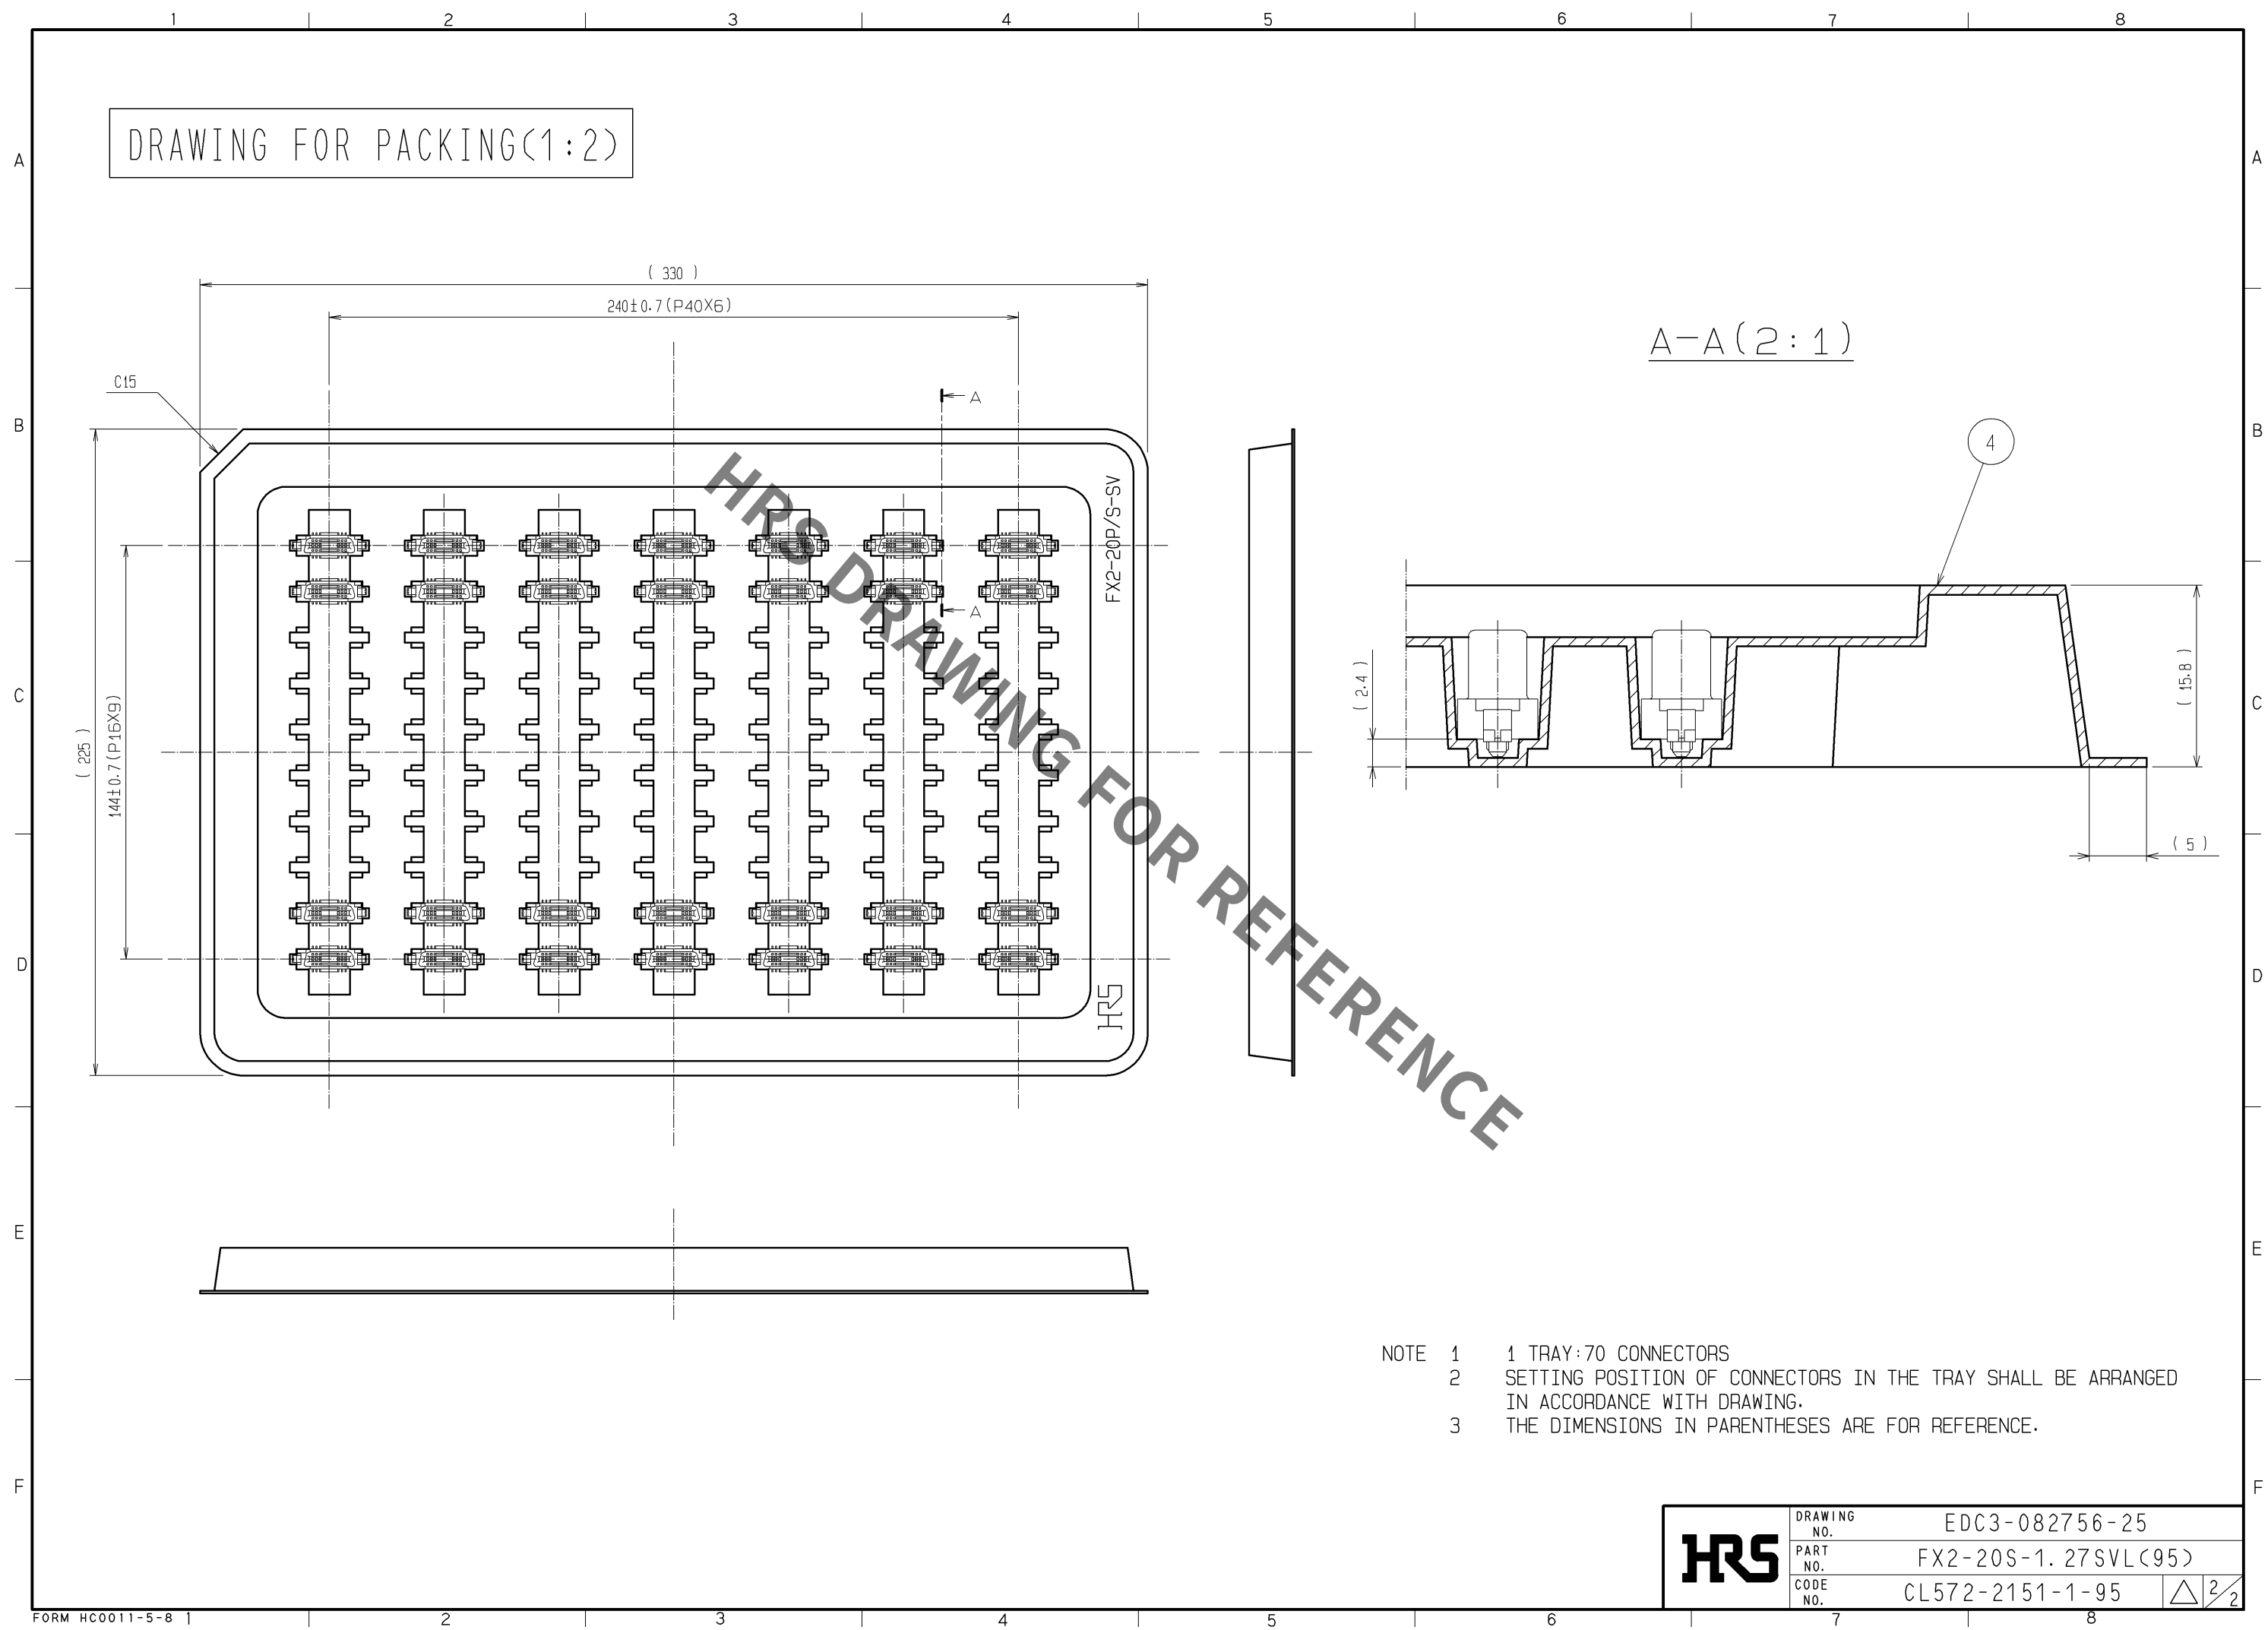

- NOTE 1 1 TRAY:70 CONNECTORS
2 SETTING POSITION OF CONNECTORS IN THE TRAY SHALL BE ARRANGED IN ACCORDANCE WITH DRAWING.
3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

HRS	DRAWING NO.	EDC3-082756-25	
	PART NO.	FX2-20S-1. 27SVL(95)	
	CODE NO.	CL572-2151-1-95	2 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX2-20S-1.27SVL\(95\)](#)