

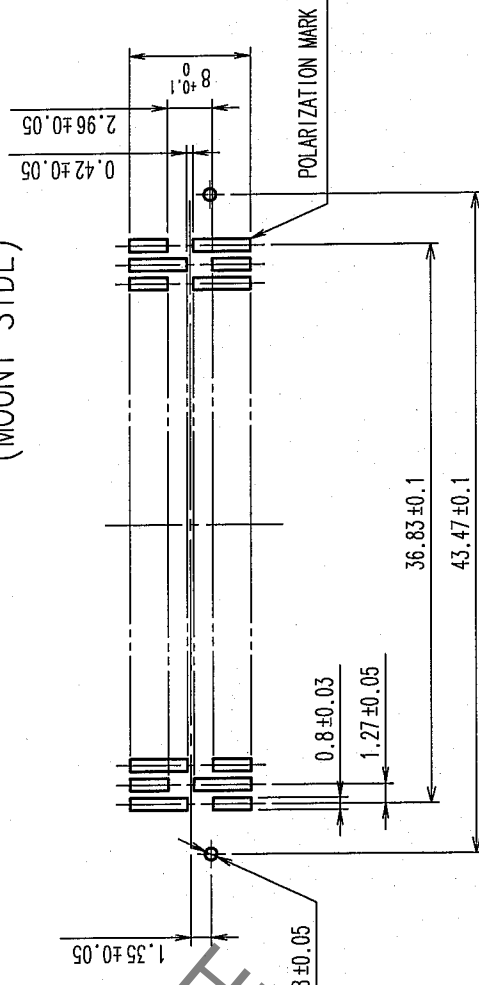


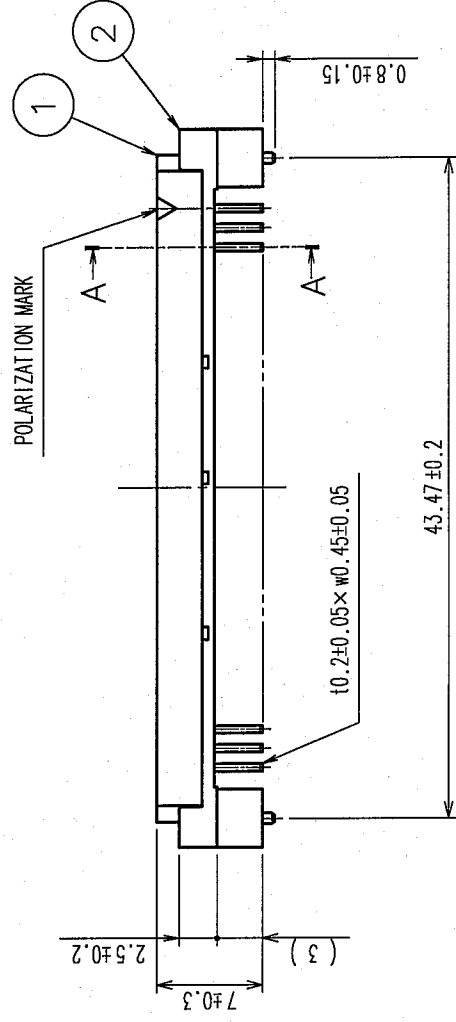


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				. .	△				. .
△				. .	△				. .
△				. .	△				. .

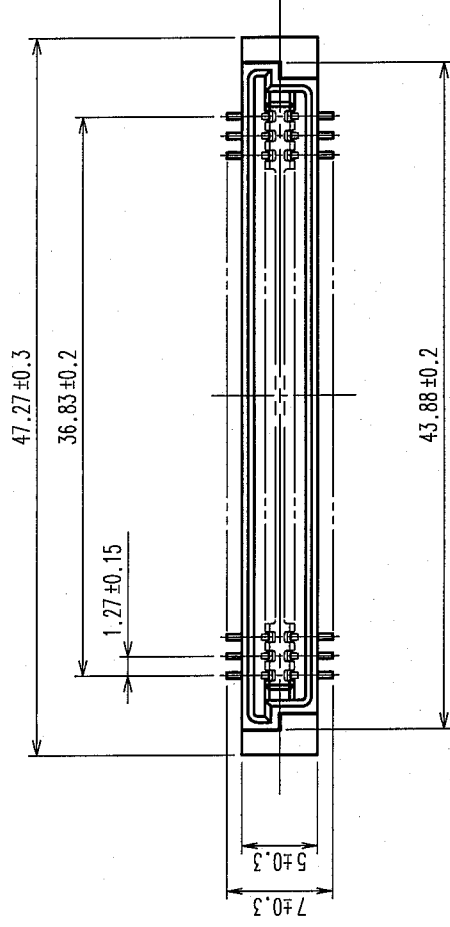

A-A(5:1)

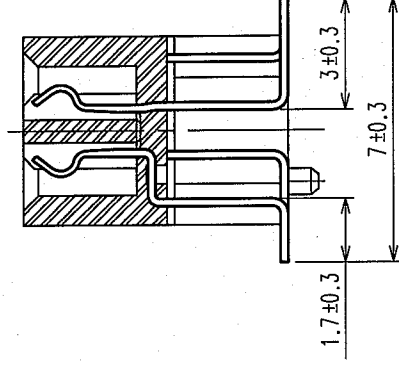

NOTES 1 LEAD CO-PLANARITY SHALL BE 0.15mm MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 LOT No. SHALL BE INDICATED AT OPTIIONAL POSITION

1,2,4 POLYAMIDE		BEIGE		UL94V-0		3		PHOSPHOR BRONZE		CONTACT AREA: GOLD 0.2μ m min. LEAD AREA: TIN-PLATING 1.2μ m min. UNDER PLATING: NICKEL 1μ m min.					
NO.	MATERIAL		FINISH, REMARKS		NO.		MATERIAL		FINISH, REMARKS						
CODE NO. (OLD) CL					DRAWN K. Doo 05-09-02		DESIGNED K. Dai 05-09-02		CHECKED K. Ogawa 05-09-02		APPROVED H. Kawara 05-09-02		RELEASED .		
DRAWING NO. EDC3-083951-21					PART NO. F4B3-60S-1.27SV(71)										
SCALE 2 : 1					CODE NO. CL574-0335-6-71									1	
UNITS mm					HIROSE ELECTRIC CO., LTD										

TO	PCK			
----	-----	--	--	--

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX4B3-60S-1.27SV\(71\)](#)