

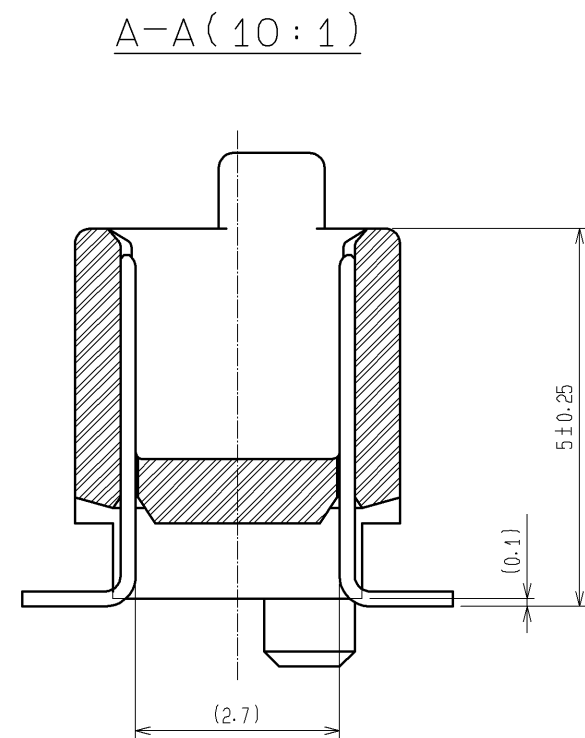


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

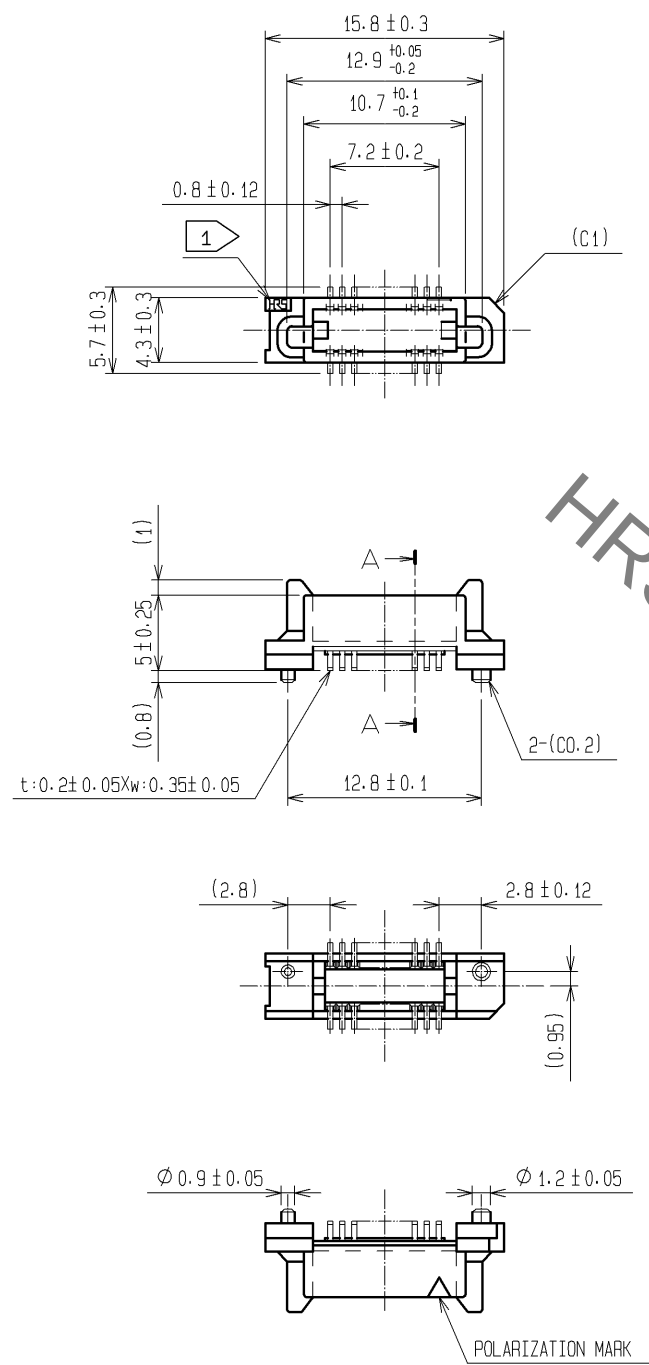

- NOTE
- 1 HRS MARK SHALL BE OPTIONAL.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 - 3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 4 PACKING SHALL BE EMBOSSED CARRIER TAPE.
SEE NEXT PAGE FOR DETAILS.
 - 5 FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.


RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNT SIDE)
(RECOMMENDED METAL MASK THICKNESS: 0.15mm) $\triangle 1$

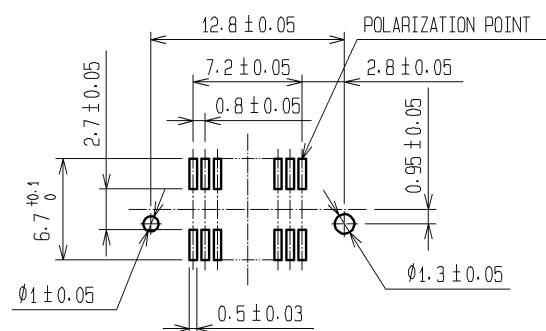

1	POLYPHENYLENE SULFIDE	LIGHT BROWN UL94V-0	4	POLYESTER	COVER TAPE
NO.	MATERIAL	FINISH, REMARKS	3	POLYSTYRENE	EMBOSSED CARRIER TAPE
UNITS mm		SCALE 2 : 1	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min. LEAD AREA: TIN-PLATING 1μm min. UNDER PLATING: NICKEL 1μm min.
COUNT 3	DESCRIPTION OF REVISIONS DIS-F-006187	DESIGNED Y.J. ASAO	NO.	MATERIAL	FINISH, REMARKS
APPROVED : HS. OKAWA	05.08.03	DRAWING NO.	EDC3-084963-22		
CHECKED : HS. OZAWA	05.08.02	PART NO.	FX6-20P-0.8SV1(92)		
DESIGNED : TK. YANAGISAWA	05.08.02	CODE NO.	CL576-0021-0-92		
DRAWN : TK. YANAGISAWA	05.08.02				

HRS HIROSE ELECTRIC CO., LTD.

Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

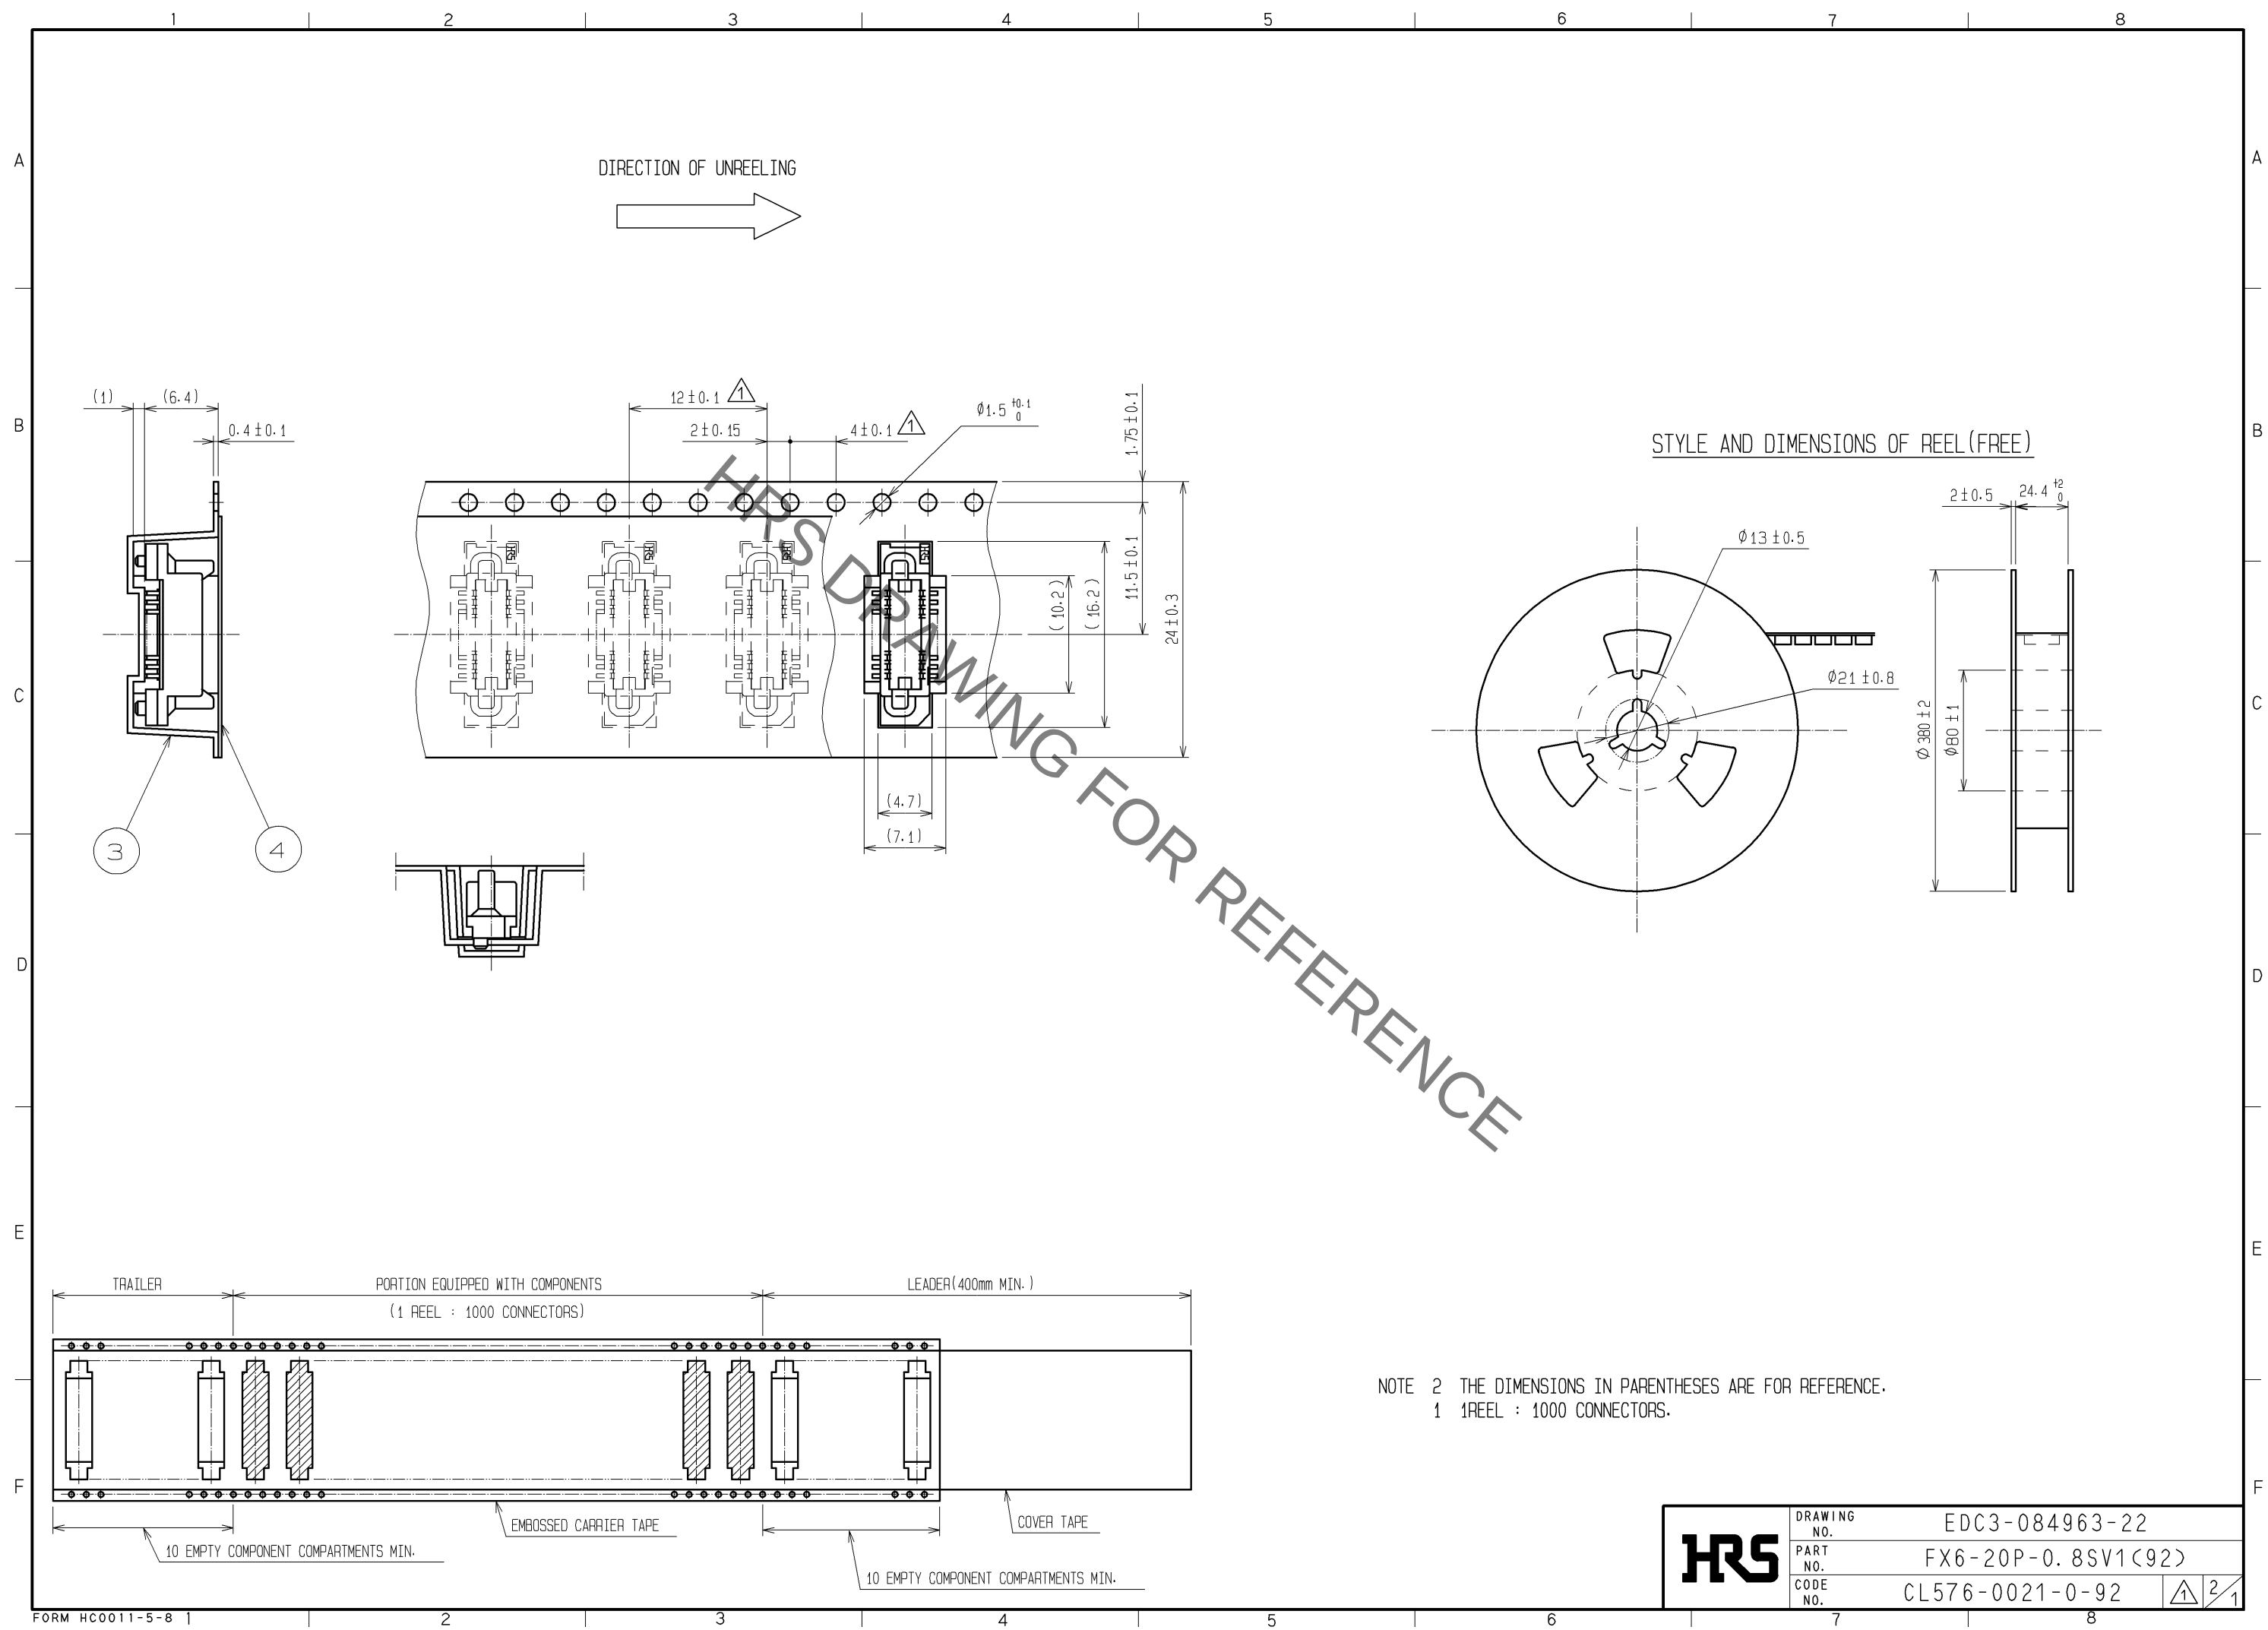

HRS	DRAWING NO.	EDC3-084963-22		
	PART NO.	FX6-20P-0.8SV1(92)		
	CODE NO.	CL576-0021-0-92		
			$\triangle$	$\frac{2}{1}$

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX6-20P-0.8SV1\(92\)](#)