

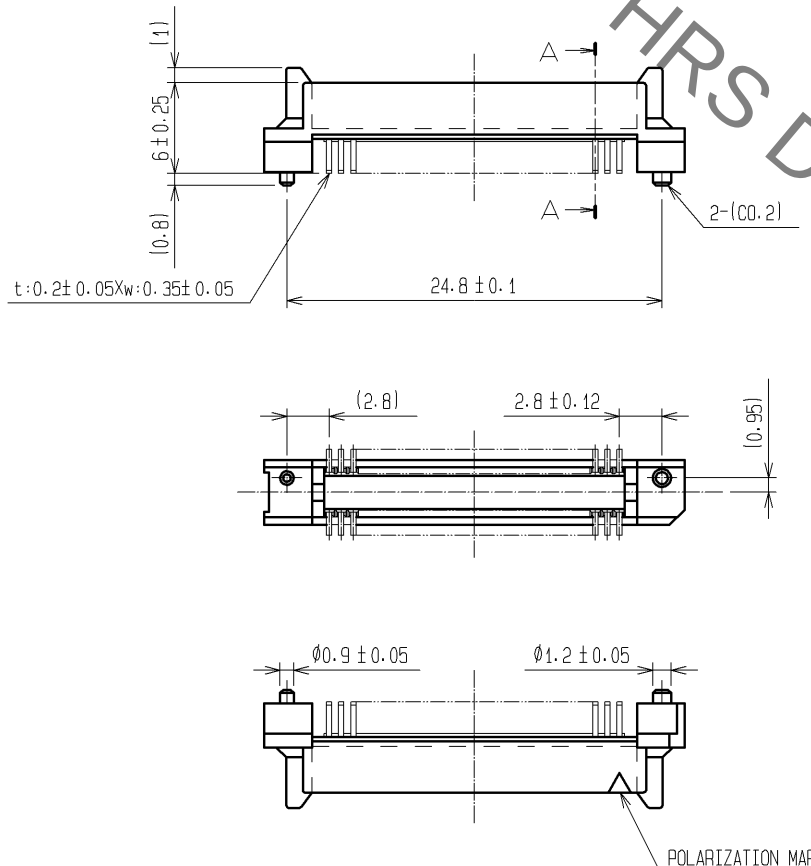


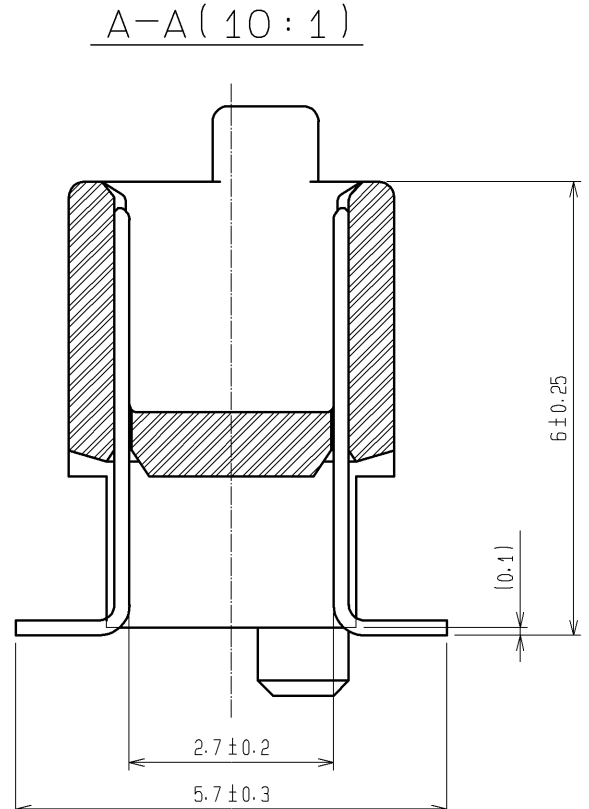


RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

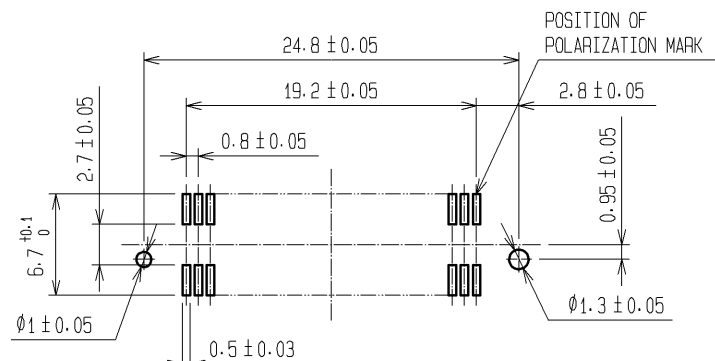

- NOTE 1 HRS MARK SHALL BE OPTIONAL.
- 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
- 3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.
- 4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
- 5 FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE
ADDED ACCORDING TO CIRCUMSTANCES.
- 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.				
					LEAD AREA:TIN-PLATING 1μm min.				
					UNDER PLATING:NICKEL 1μm min.				
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.	APPROVED :HS. OKAWA		07. 06. 05		DRAWING NO.		EDC3-071639-23		
	CHECKED :HS. OZAWA		07. 06. 04		PART NO.		FX6-50P-0. 8SV2 (93)		
	DESIGNED :KT. DOI		07. 06. 04		CODE NO.		C1576-0044-6-93		
	DRAWN :TS. MIYAKI		07. 06. 01				 1		

Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

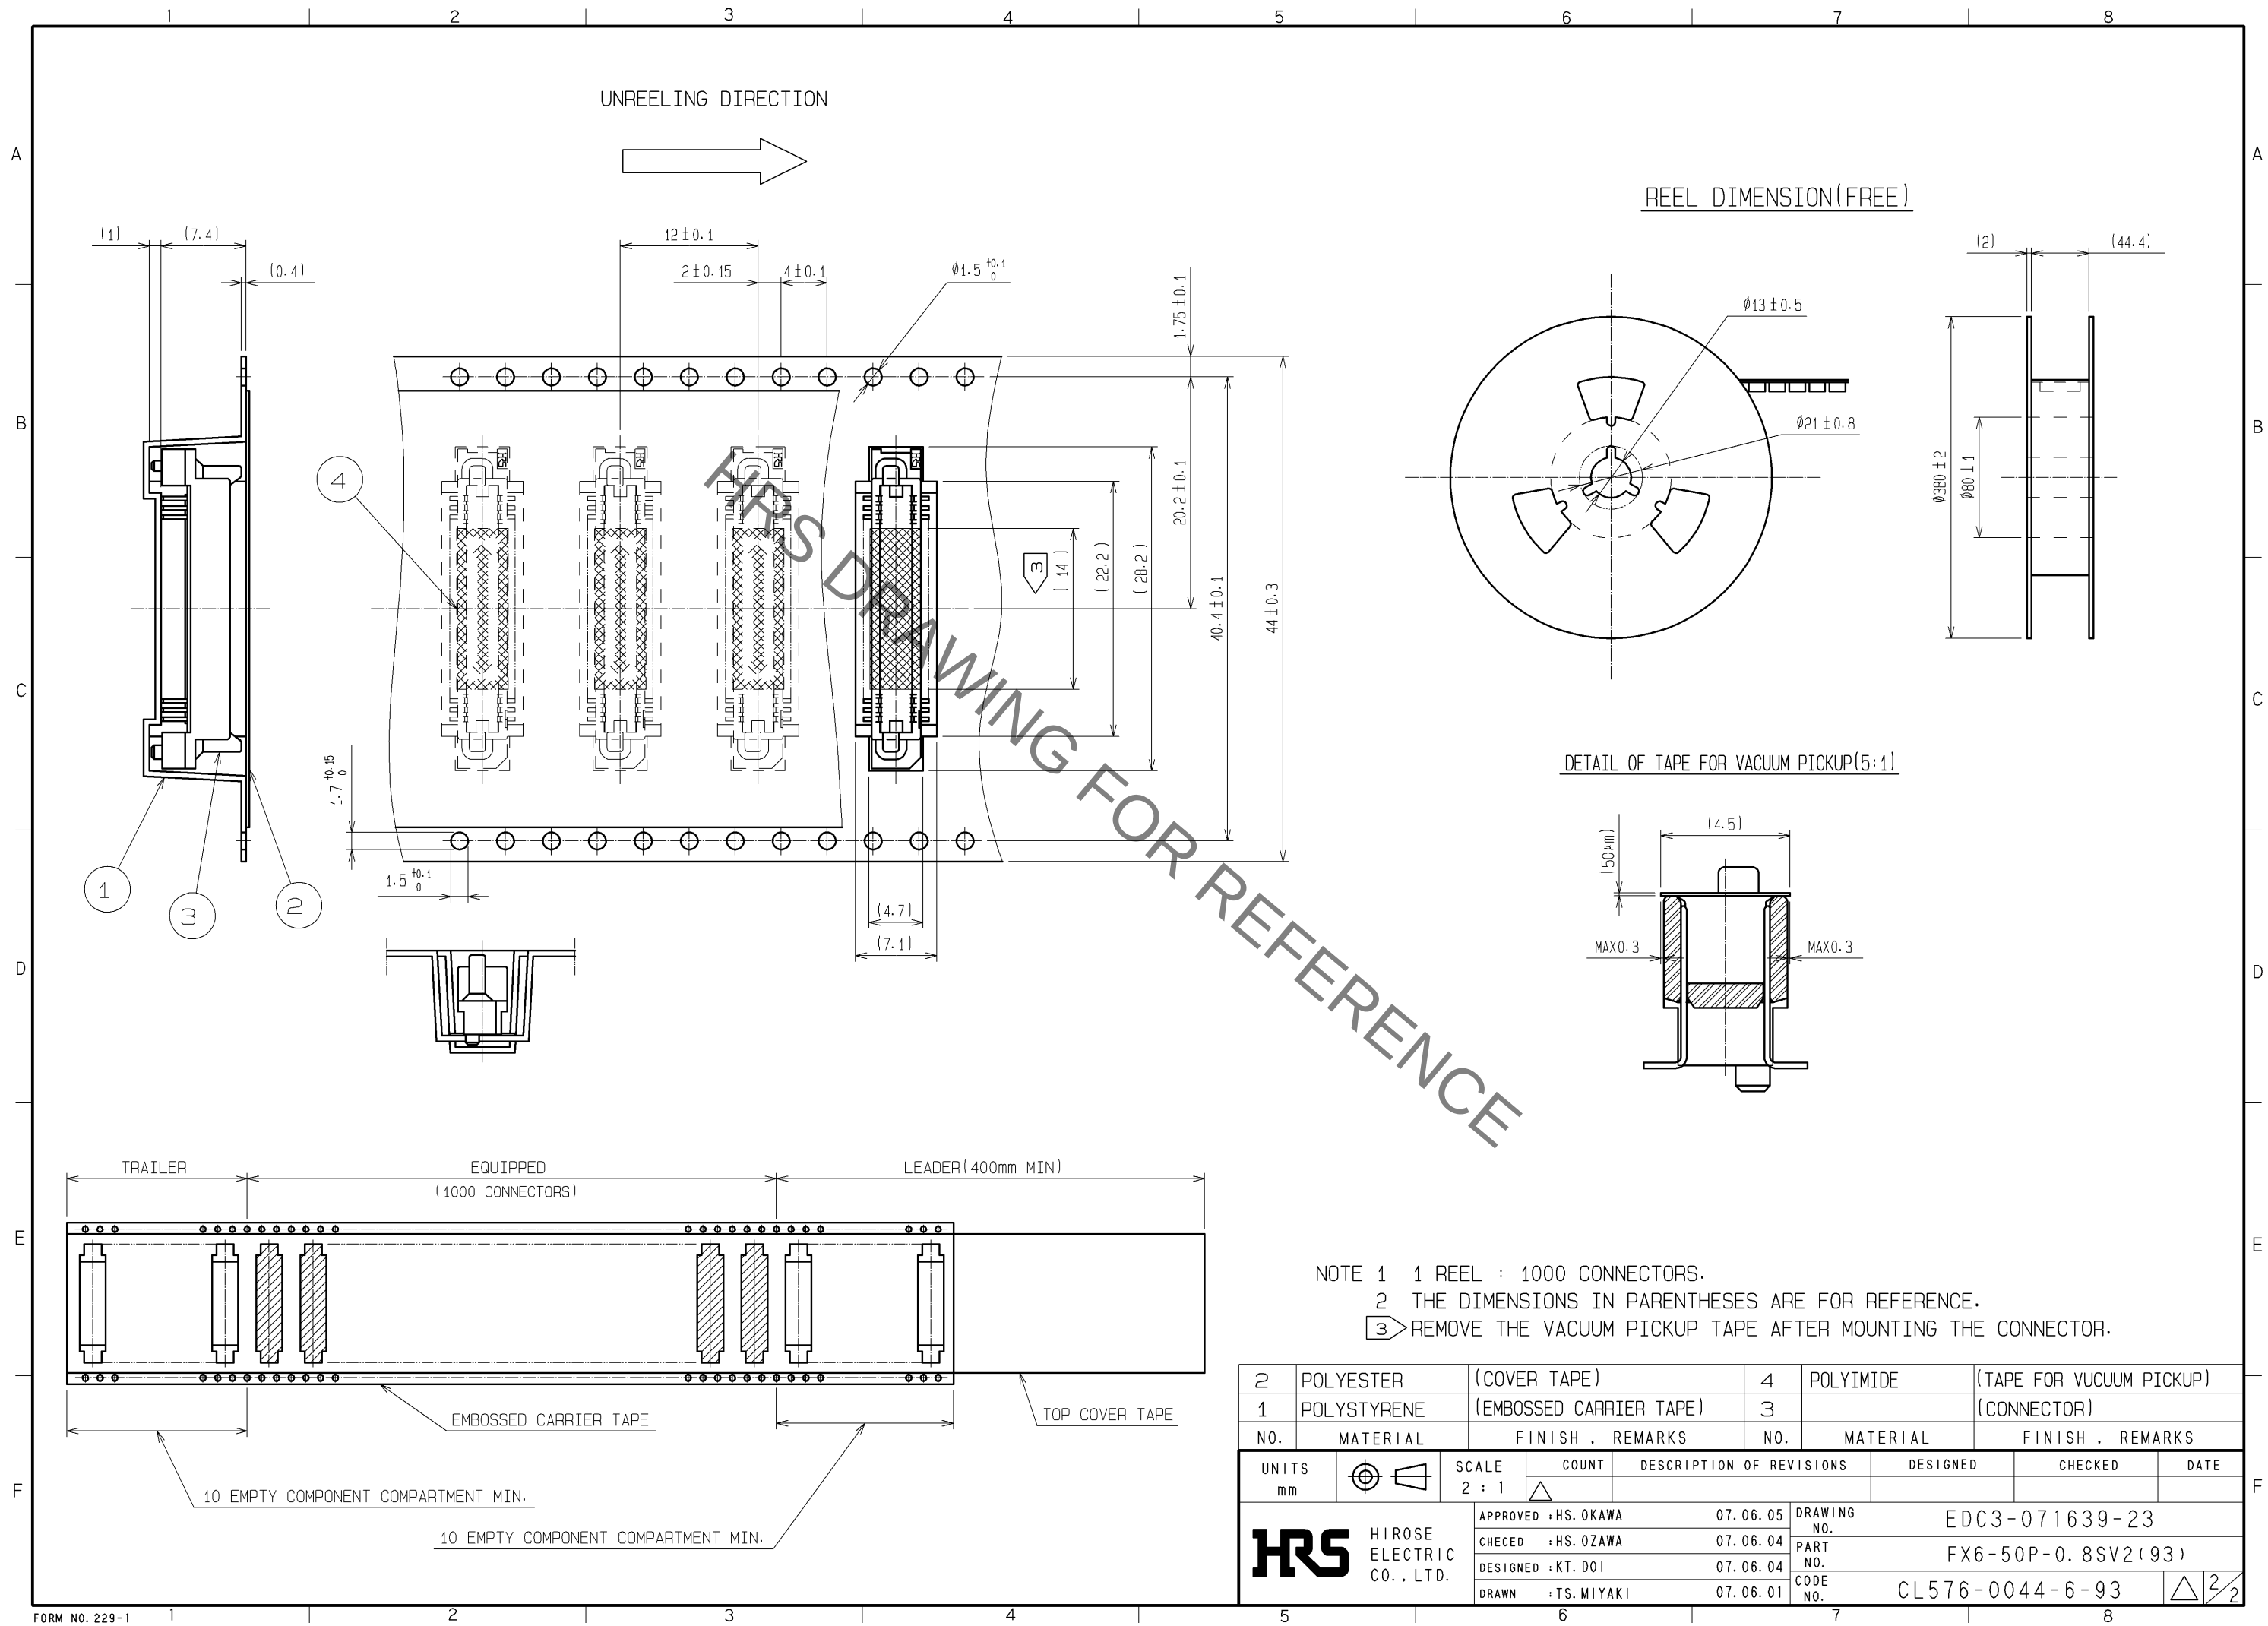

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX6-50P-0.8SV2\(93\)](#)