



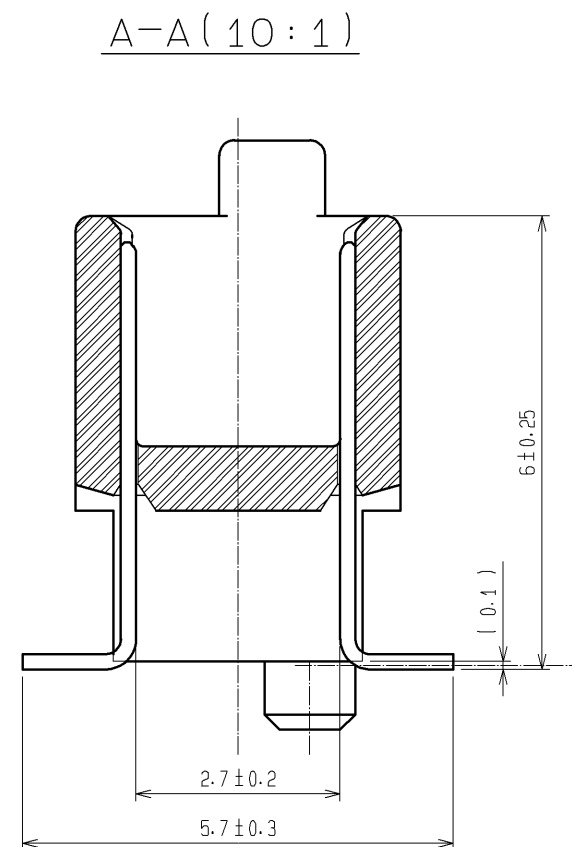


RECOMMENDED LAND PATTERN DIMENSION OF PCB(MOUNTING SIDE)

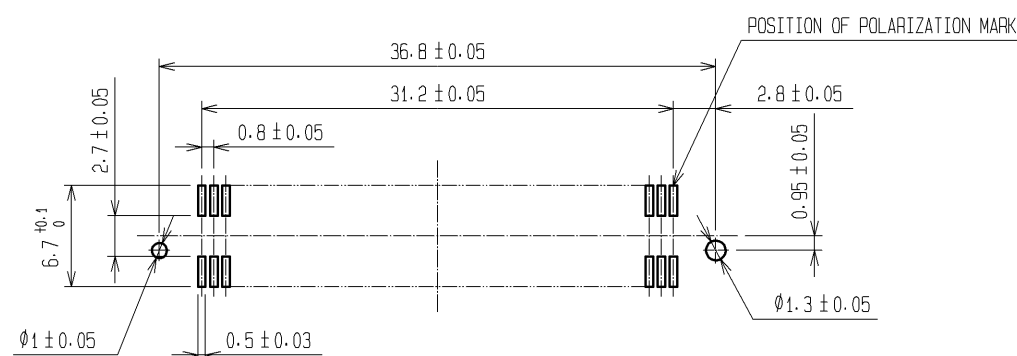

1	PPS	LIGHT BROWN (UL94V-0)		2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.	
					LEAD AREA:TIN-PLATING 1μm min.		
					UNDER PLATING:NICKEL 1μm min.		
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS	
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED
							CHECKED
							DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	07. 06. 20	DRAWING NO.	EDC3-084973-23		
		CHECKED : HS. OZAWA	07. 06. 20	PART NO.	FX6-80P-0. 8SV2 (93)		
		DESIGNED : KT. DOI	07. 06. 20	CODE NO.	CL576-0047-4-93		
		DRAWN : TS. MIYAKI	07. 06. 18				

Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

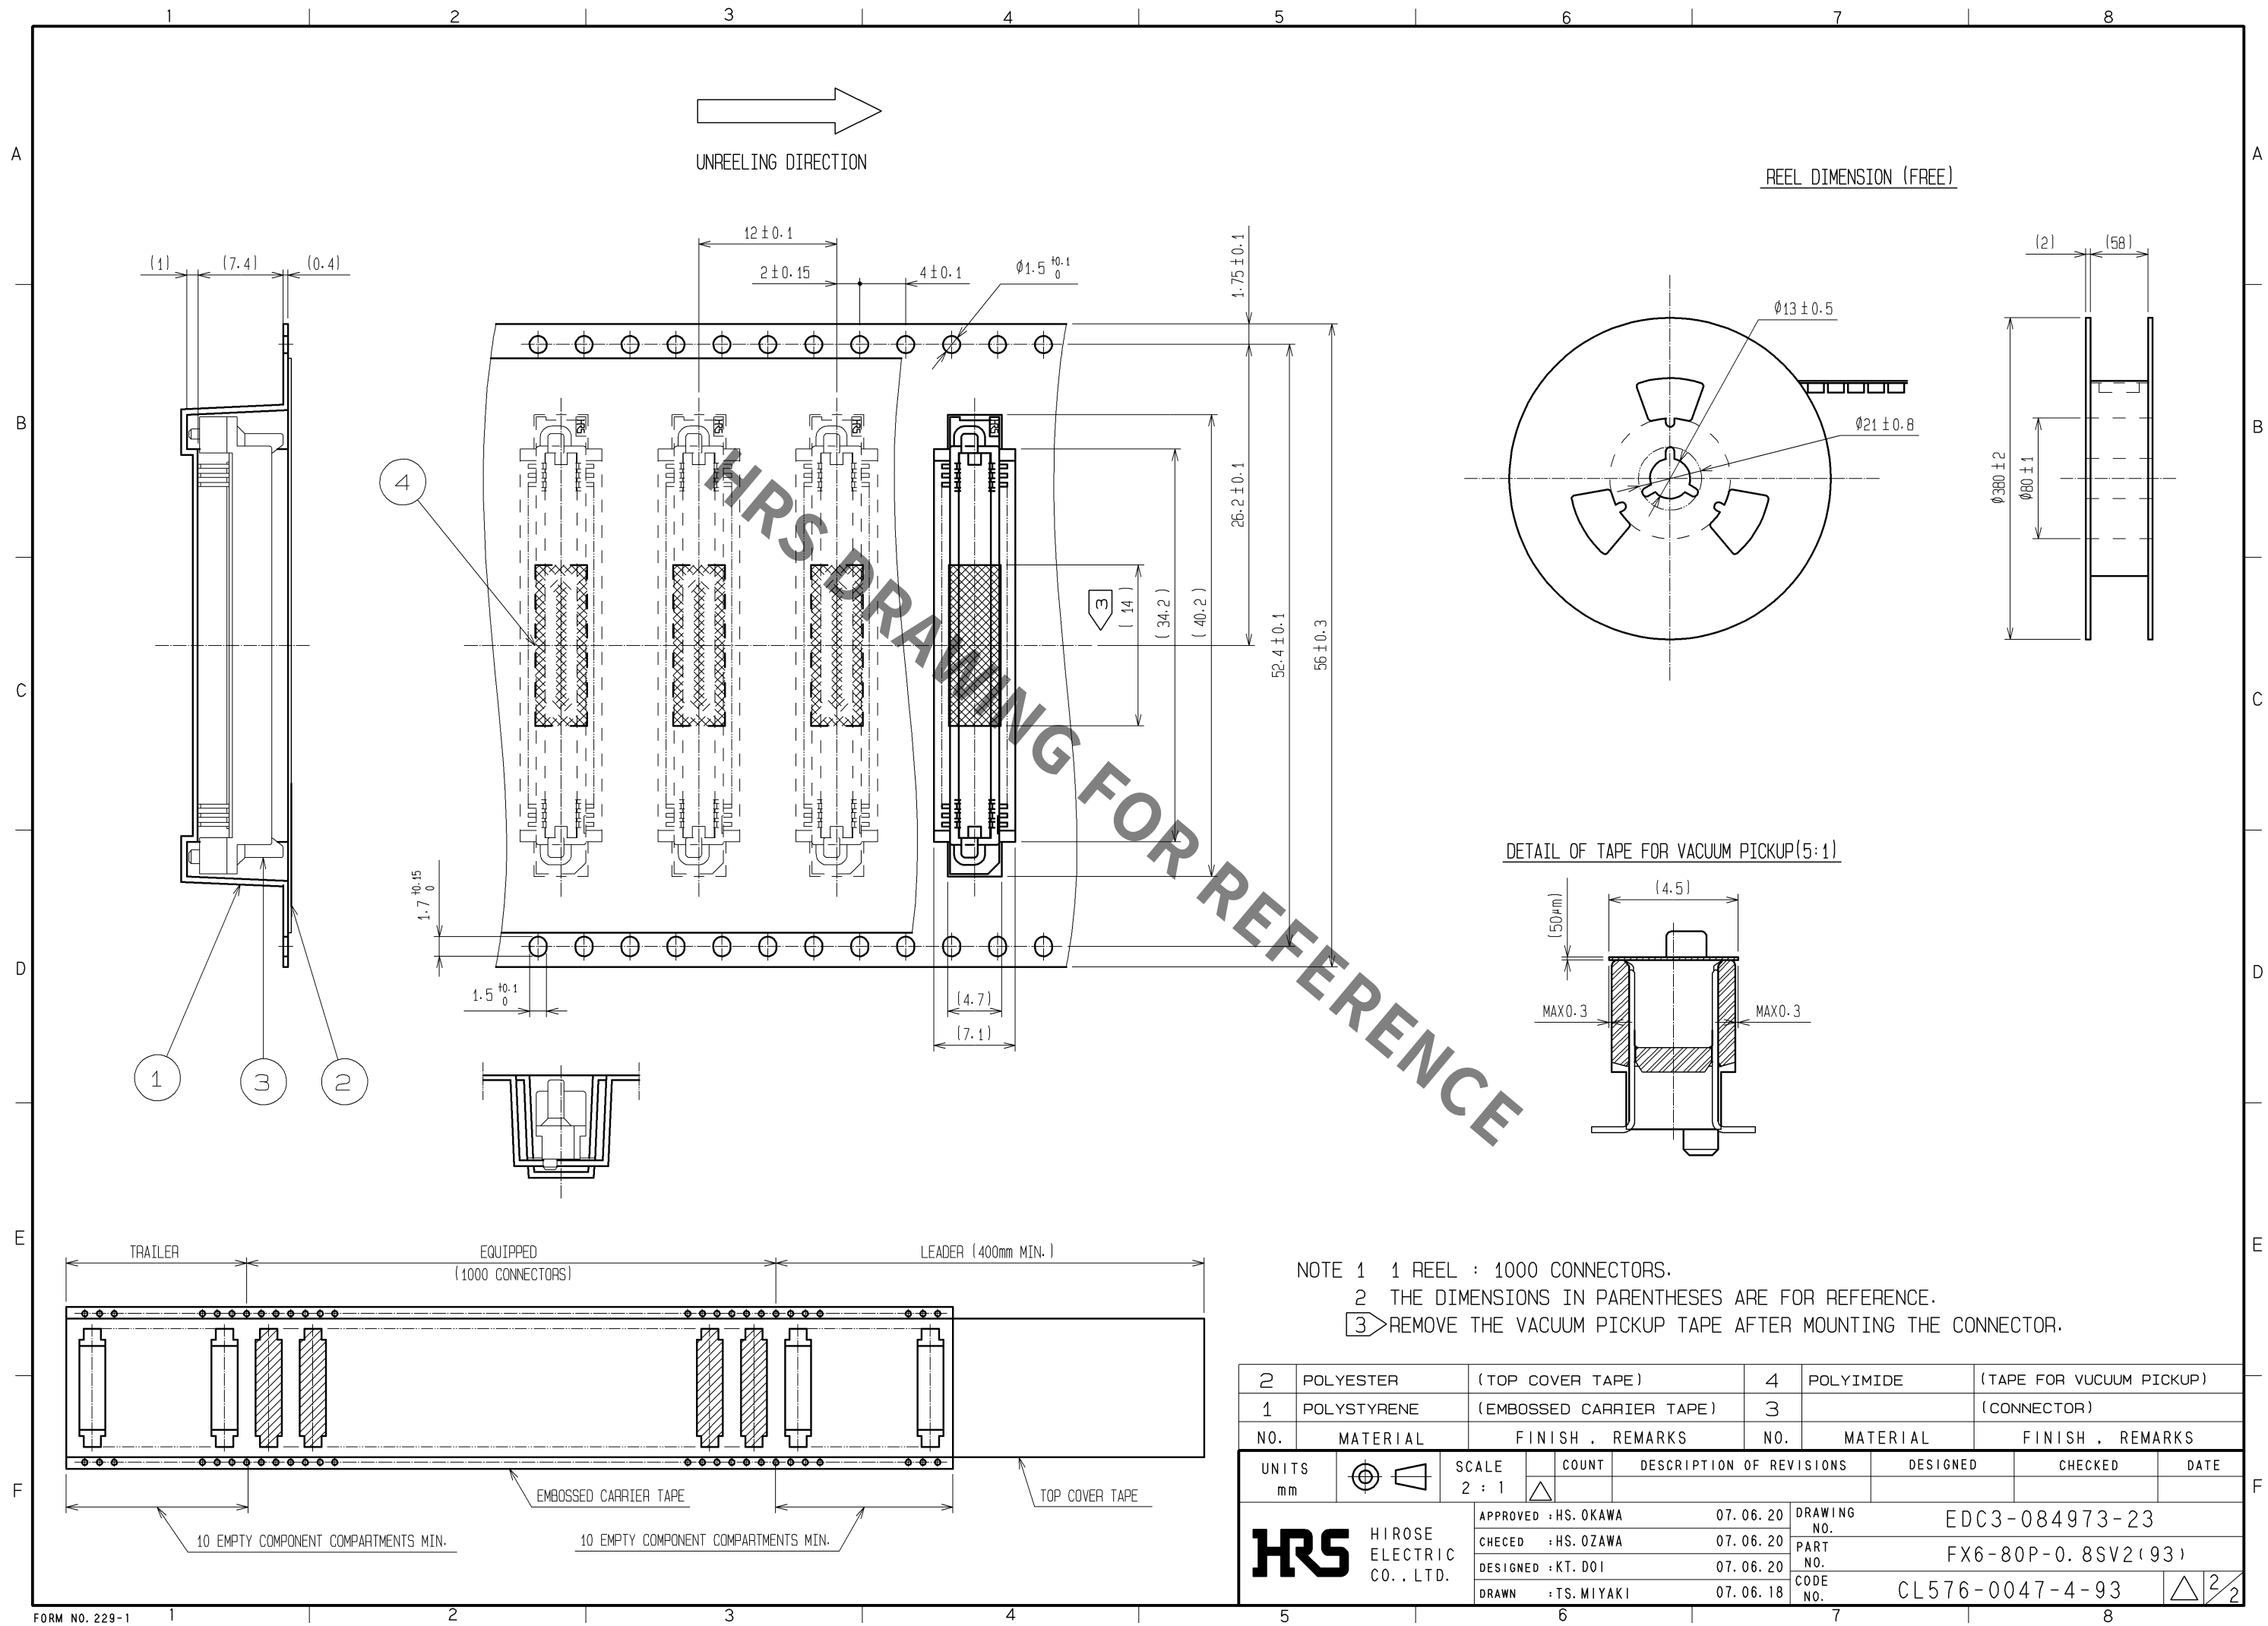

2	POLYESTER	(TOP COVER TAPE)		4	POLYIMIDE	(TAPE FOR VUCUUM PICKUP)		
1	POLYSTYRENE	(EMBOSSSED CARRIER TAPE)		3		(CONNECTOR)		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO. , LTD.		APPROVED : HS. OKAWA	07.06.20	DRAWING NO.	EDC3-084973-23			
		CHECED : HS. OZAWA	07.06.20	PART NO.	FX6-80P-0.8SV2(93)			
		DESIGNED : KT. DOI	07.06.20	CODE NO.	CL576-0047-4-93			
		DRAWN : TS. MIYAKI	07.06.18	2/2				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX6-80P-0.8SV2\(93\)](#)