


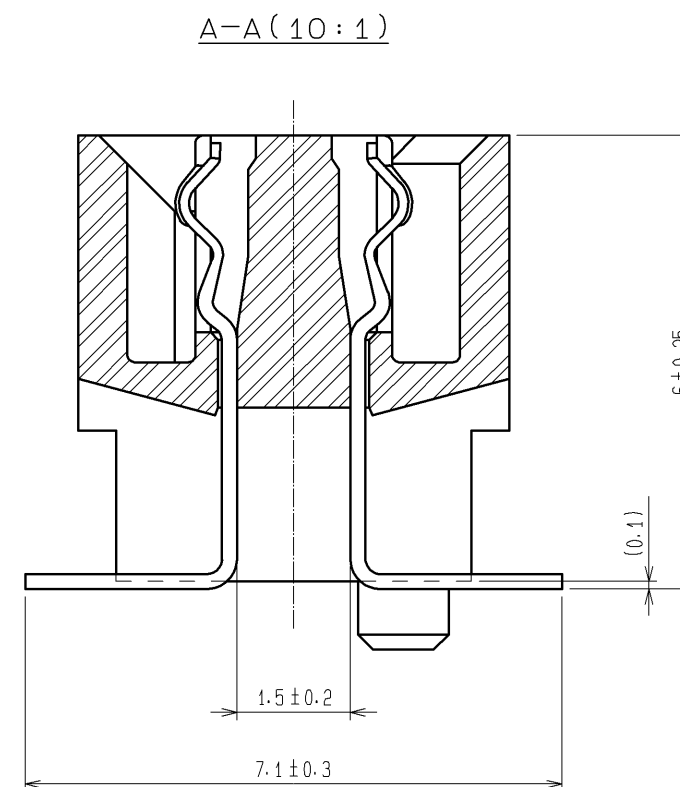

NOTE 1 ▶ R/S MARK SHALL BE OPTIONAL.

2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.

3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.

4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.

5 FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE
ADDED ACCORDING TO CIRCUMSTANCES.

6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

Technical drawing of a rectangular plate with dimensions and tolerances. The drawing shows a rectangular plate with a central horizontal slot. The overall width is 23.2 ± 0.05 . The distance from the left edge to the center of the slot is 19.2 ± 0.05 . The distance from the right edge to the center of the slot is 2 ± 0.05 . The overall height is 1.45 ± 0.05 . The distance from the top edge to the center of the slot is 0.8 ± 0.05 . The distance from the bottom edge to the center of the slot is 1.5 ± 0.05 . The distance from the left edge to the center of the slot is 8.1 ± 0.1 . The distance from the right edge to the center of the slot is 0.5 ± 0.03 . The diameter of the hole is $\phi 1 \pm 0.05$. The diameter of the slot is $\phi 1.3 \pm 0.05$. The position of the hole is indicated by a dashed line and the text "POSITION OF HOLE".

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.							
		LEAD AREA:TIN-PLATING 1μm min.							
		UNDER PLATING:NICKEL 2μm min.							
1	PPS	LIGHT BROWN (UL94V-0)		5	POLYIMIDE	(TAPE FOR VUCUUM PICKUP)			
				4	POLYESTER	(TOP COVER TAPE)			
				3	POLYSTYRENE	(EMBOSSSED CARRIER TAPE)			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			


UNITS mm		SCALE 2 : 1		COUNT 2	DESCRIPTION OF REVISIONS DIS-F-003246	DESIGNED HK. SUNADORI	CHECKED HT. YAMAGUCHI	DATE 08. 07. 22
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	08. 06. 13	DRAWING NO. EDC3-071641-23				
		CHECED : HT. YAMAGUCHI	08. 06. 13	PART NO. FX6-50S-0. 8SV2(93)				
		DESIGNED : SY. KAMIGA	08. 06. 12	CODE NO. CL576-0124-3-93				
		DRAWN : HK. SUNADORI	08. 06. 12	 				

Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING(2:1)

UNREELING DIRECTION
→

REELED DIMENSION (FREE)

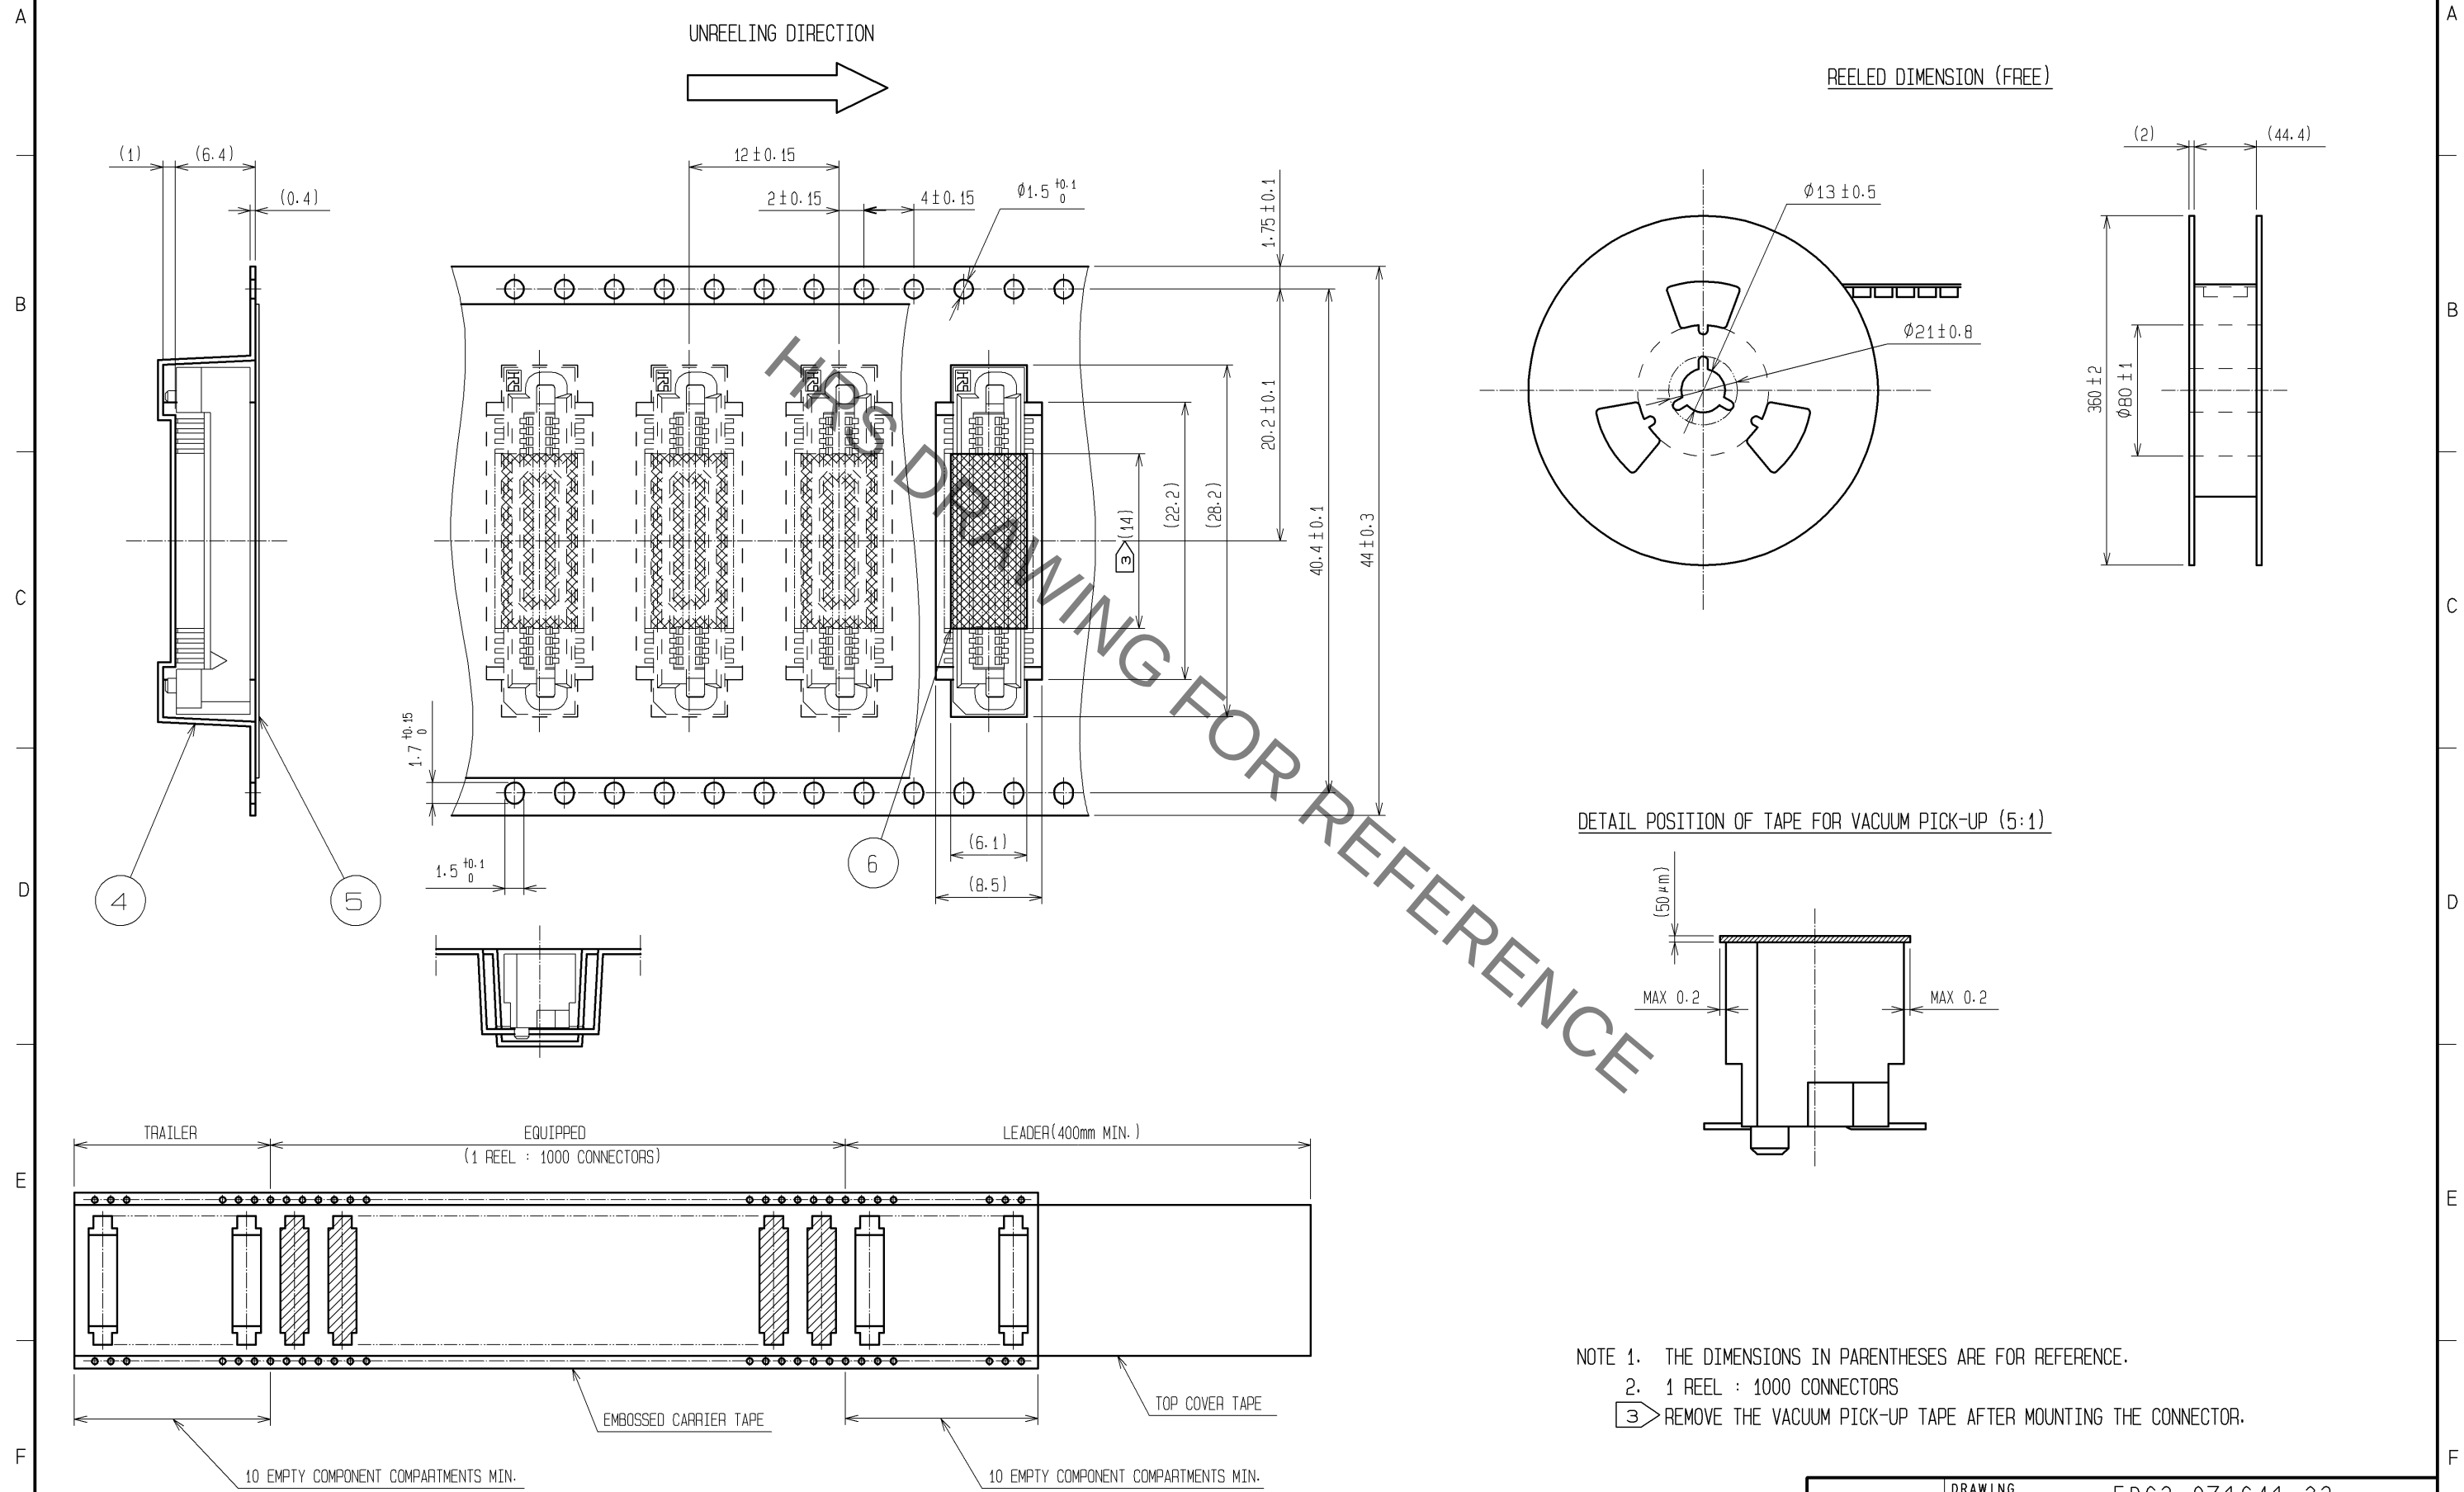

- NOTE 1. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
2. 1 REEL : 1000 CONNECTORS
3. REMOVE THE VACUUM PICK-UP TAPE AFTER MOUNTING THE CONNECTOR.

HRS	DRAWING NO.	EDC3-071641-23
	PART NO.	FX6-50S-0.8SV2(93)
	CODE NO.	CL576-0124-3-93
		2/2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX6-50S-0.8SV2\(93\)](#)