


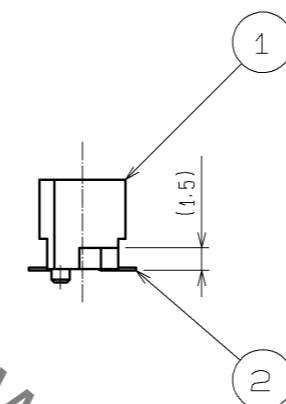


RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

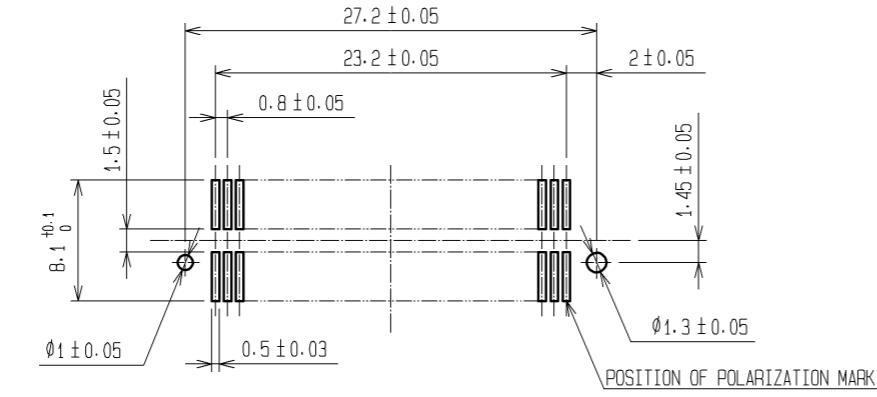

A-A (10 : 1)

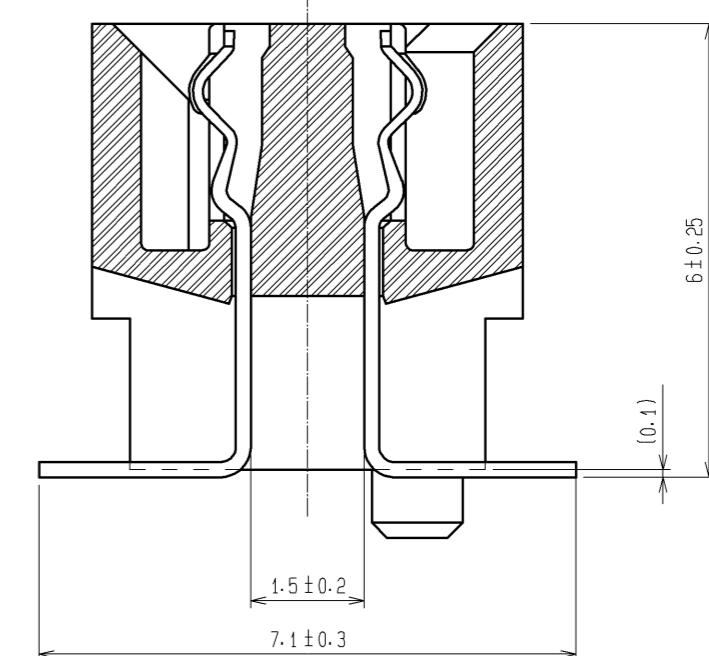



NOTE

- 1 HRS MARK SHALL BE OPTIONAL.
- 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
- 3 TUBE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT. SEE NEXT PAGE FOR DETAILS.
- 4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
- 5 FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
- 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.


NO.	MATERIAL	FINISH, REMARKS	CONTACT AREA: GOLD 0.1µm min.		DESIGNED	CHECKED	DATE		
			UNITS mm	SCALE 2 : 1					
2	PHOSPHOR BRONZE	LEAD AREA: TIN-PLATING 1µm min. UNDER PLATING: NICKEL 2µm min.			5	POLYIMIDE	(TAPE FOR VACUUM PICKUP)		
1	PPS	LIGHT BROWN (UL94V-0)			4	PVC	(STOPPER)		
					3	PVC	(TUBE)		
NO.	MATERIAL	FINISH, REMARKS	UNITS mm	SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
						APPROVED : HS. OKAWA	08.07.23	DRAWING NO.	EDC3-084982-21
						CHECDED : HT. YAMAGUCHI	08.07.23	PART NO.	FX6-60S-0.8SV2(91)
						DESIGNED : SY. KAMIGA	08.07.22	CODE NO.	CL576-0125-6-91
						DRAWN : HK. SUNADORI	08.07.18		△ 1/2

HRS
HIROSE
ELECTRIC
CO., LTD.

DRAWING FOR PACKING(FREE)

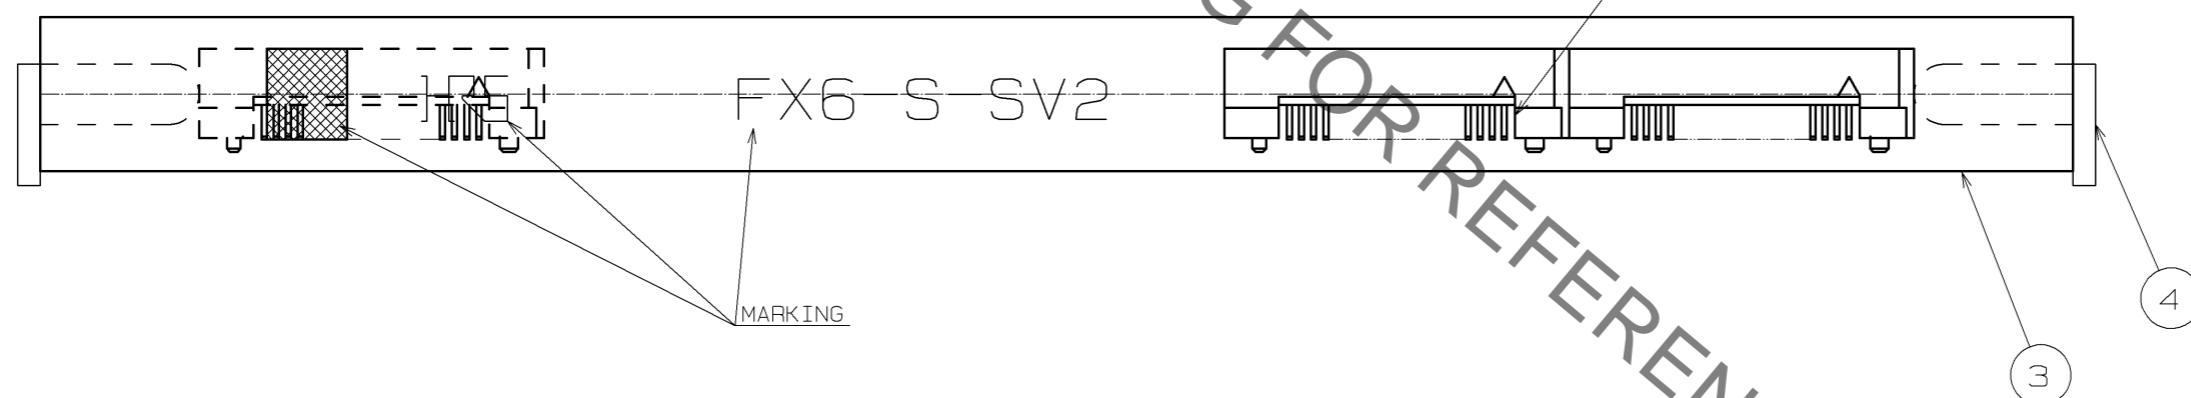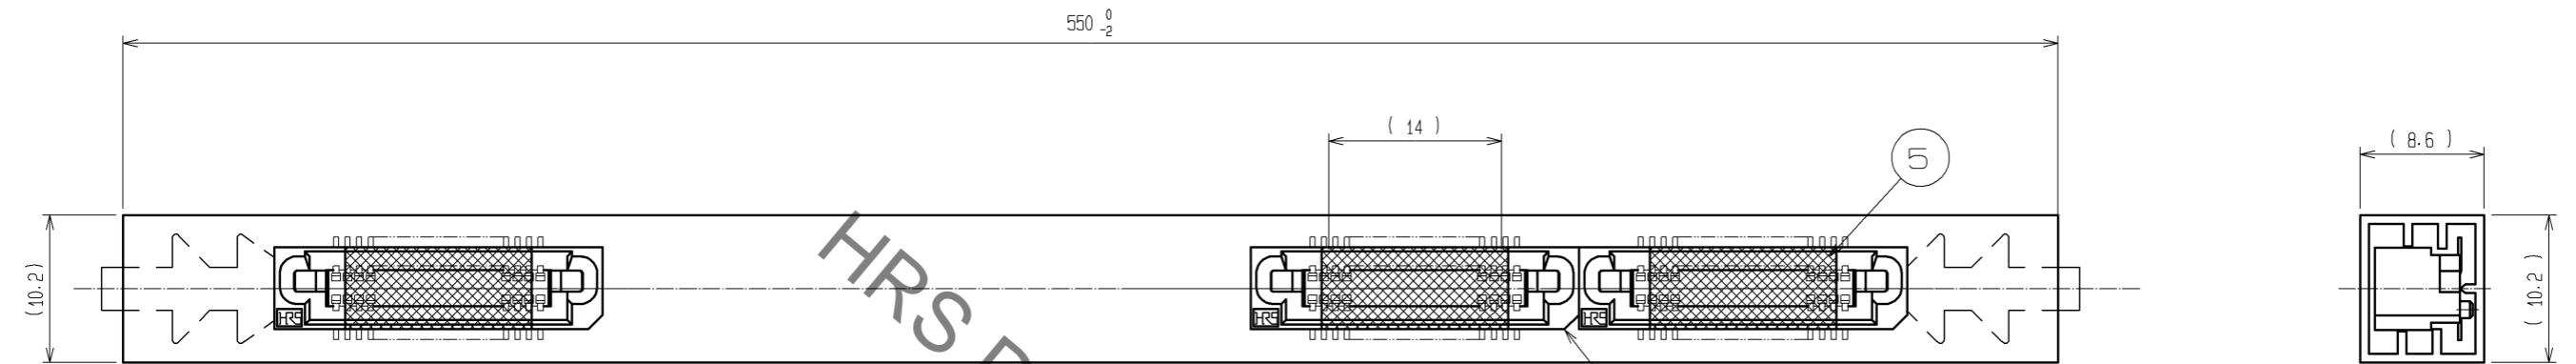

DETAIL FOR TAPE FOR VACUUM PICK-UP(5:1)

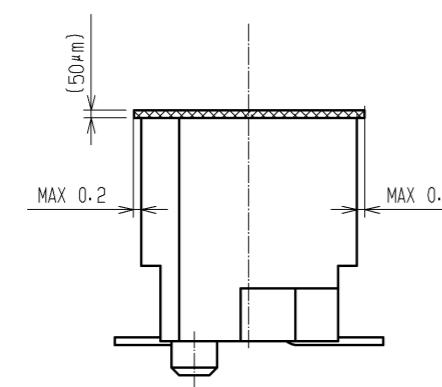

NOTE 1 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
2 ONE TUBE CONSISTS OF 16 PIECES.
3 REMOVE THE VACUUM PICK-UP TAPE AFTER MOUNTING THE CONNECTOR.

HRS	DRAWING NO. EDC3-084982-21
	PART NO. FX6-60S-0.8SV2(91)
	CODE NO. CL576-0125-6-91

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX6-60S-0.8SV2\(91\)](#)