

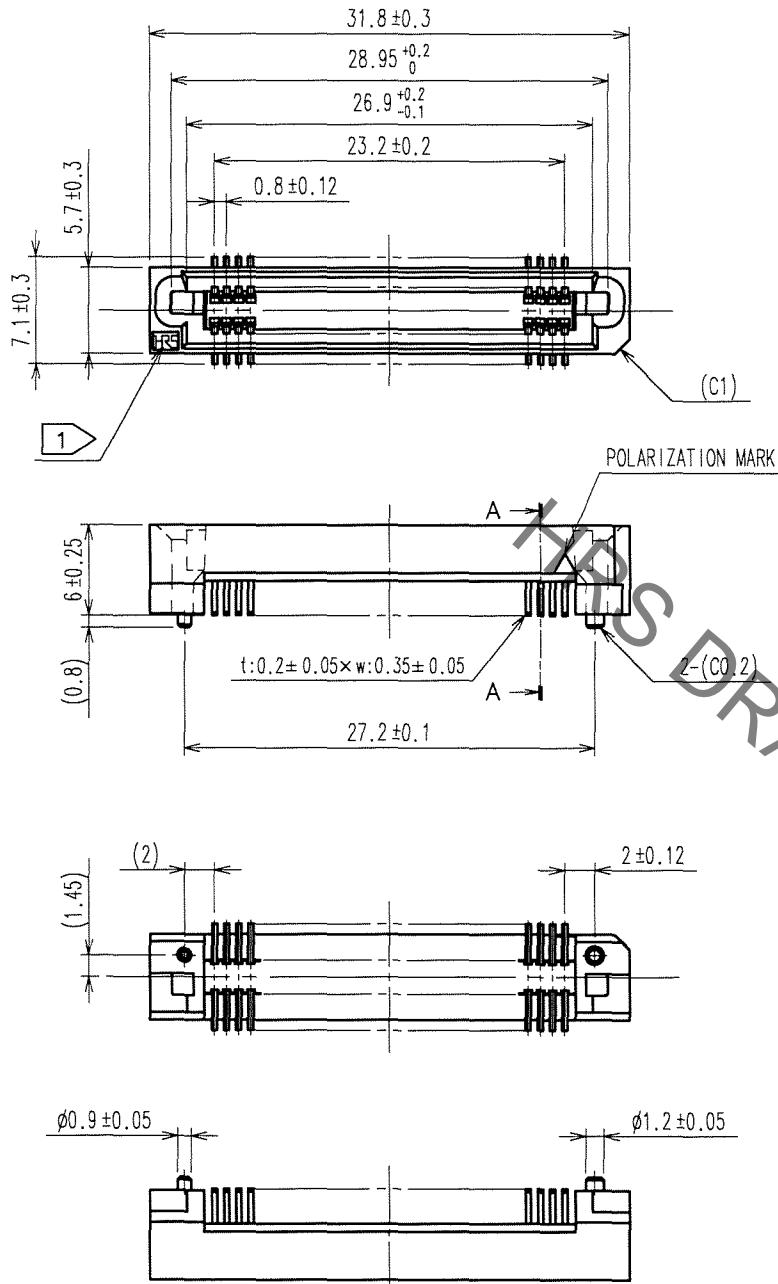


Aug.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
Automotive equipment / device which demand high reliability kindly contact our sales window/ correspondents


RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

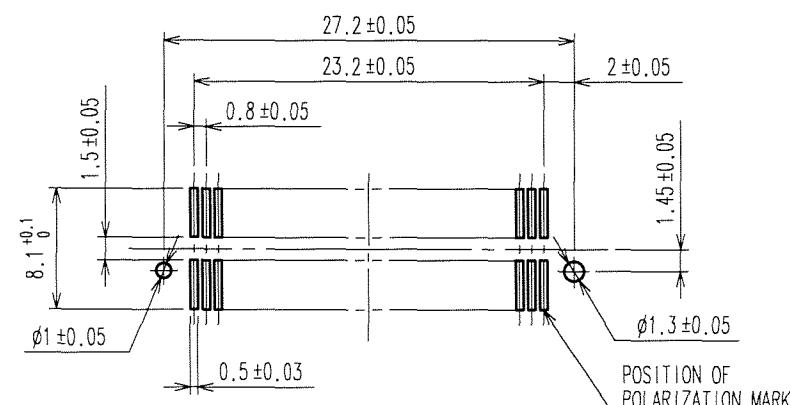

100.2

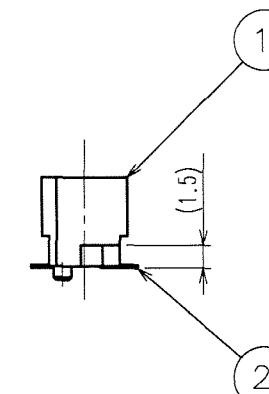

A-A(10:1)

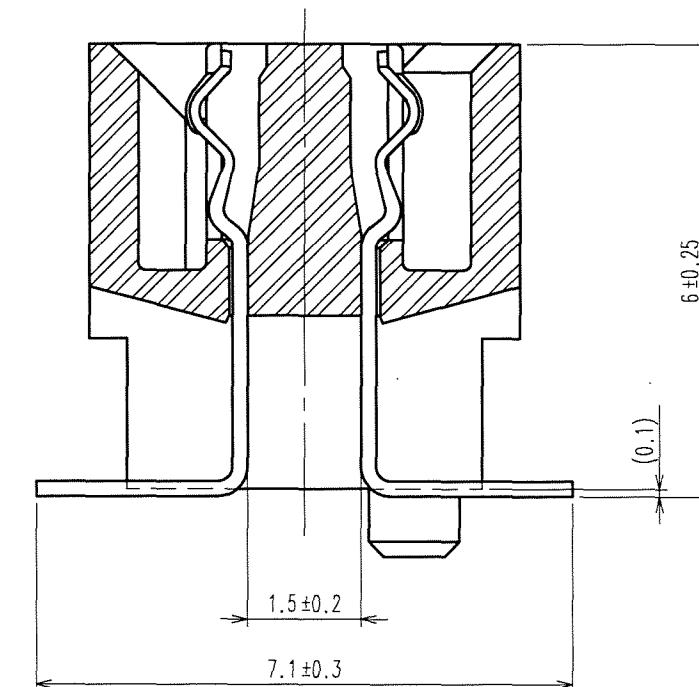

NOTE 1 HRS MARK SHALL BE OPTIONAL.


2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.


3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.

4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.

5 FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE
ADDED ACCORDING TO CIRCUMSTANCES.

6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min.
					LEAD AREA: TIN-PLATING 1μm min.
					UNDER PLATING: NICKEL 2μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO.(OLD)			DRAWN	DESIGNED	CHECKED
			S.KAMIGA	<i>K.Nakamura</i>	<i>K.Ozawa</i>
			06.04.20	06.04.20	06.04.21
					06.04.21
					.
 SCALE 2 : 1		DRAWING NO. EDC3-084982-23	PART NO. FX6-60S-0.8SV2(93)		
UNITS mm		 HIROSE ELECTRIC CO., LTD	CODE NO. CL576-0125-6-93		
			1 2		

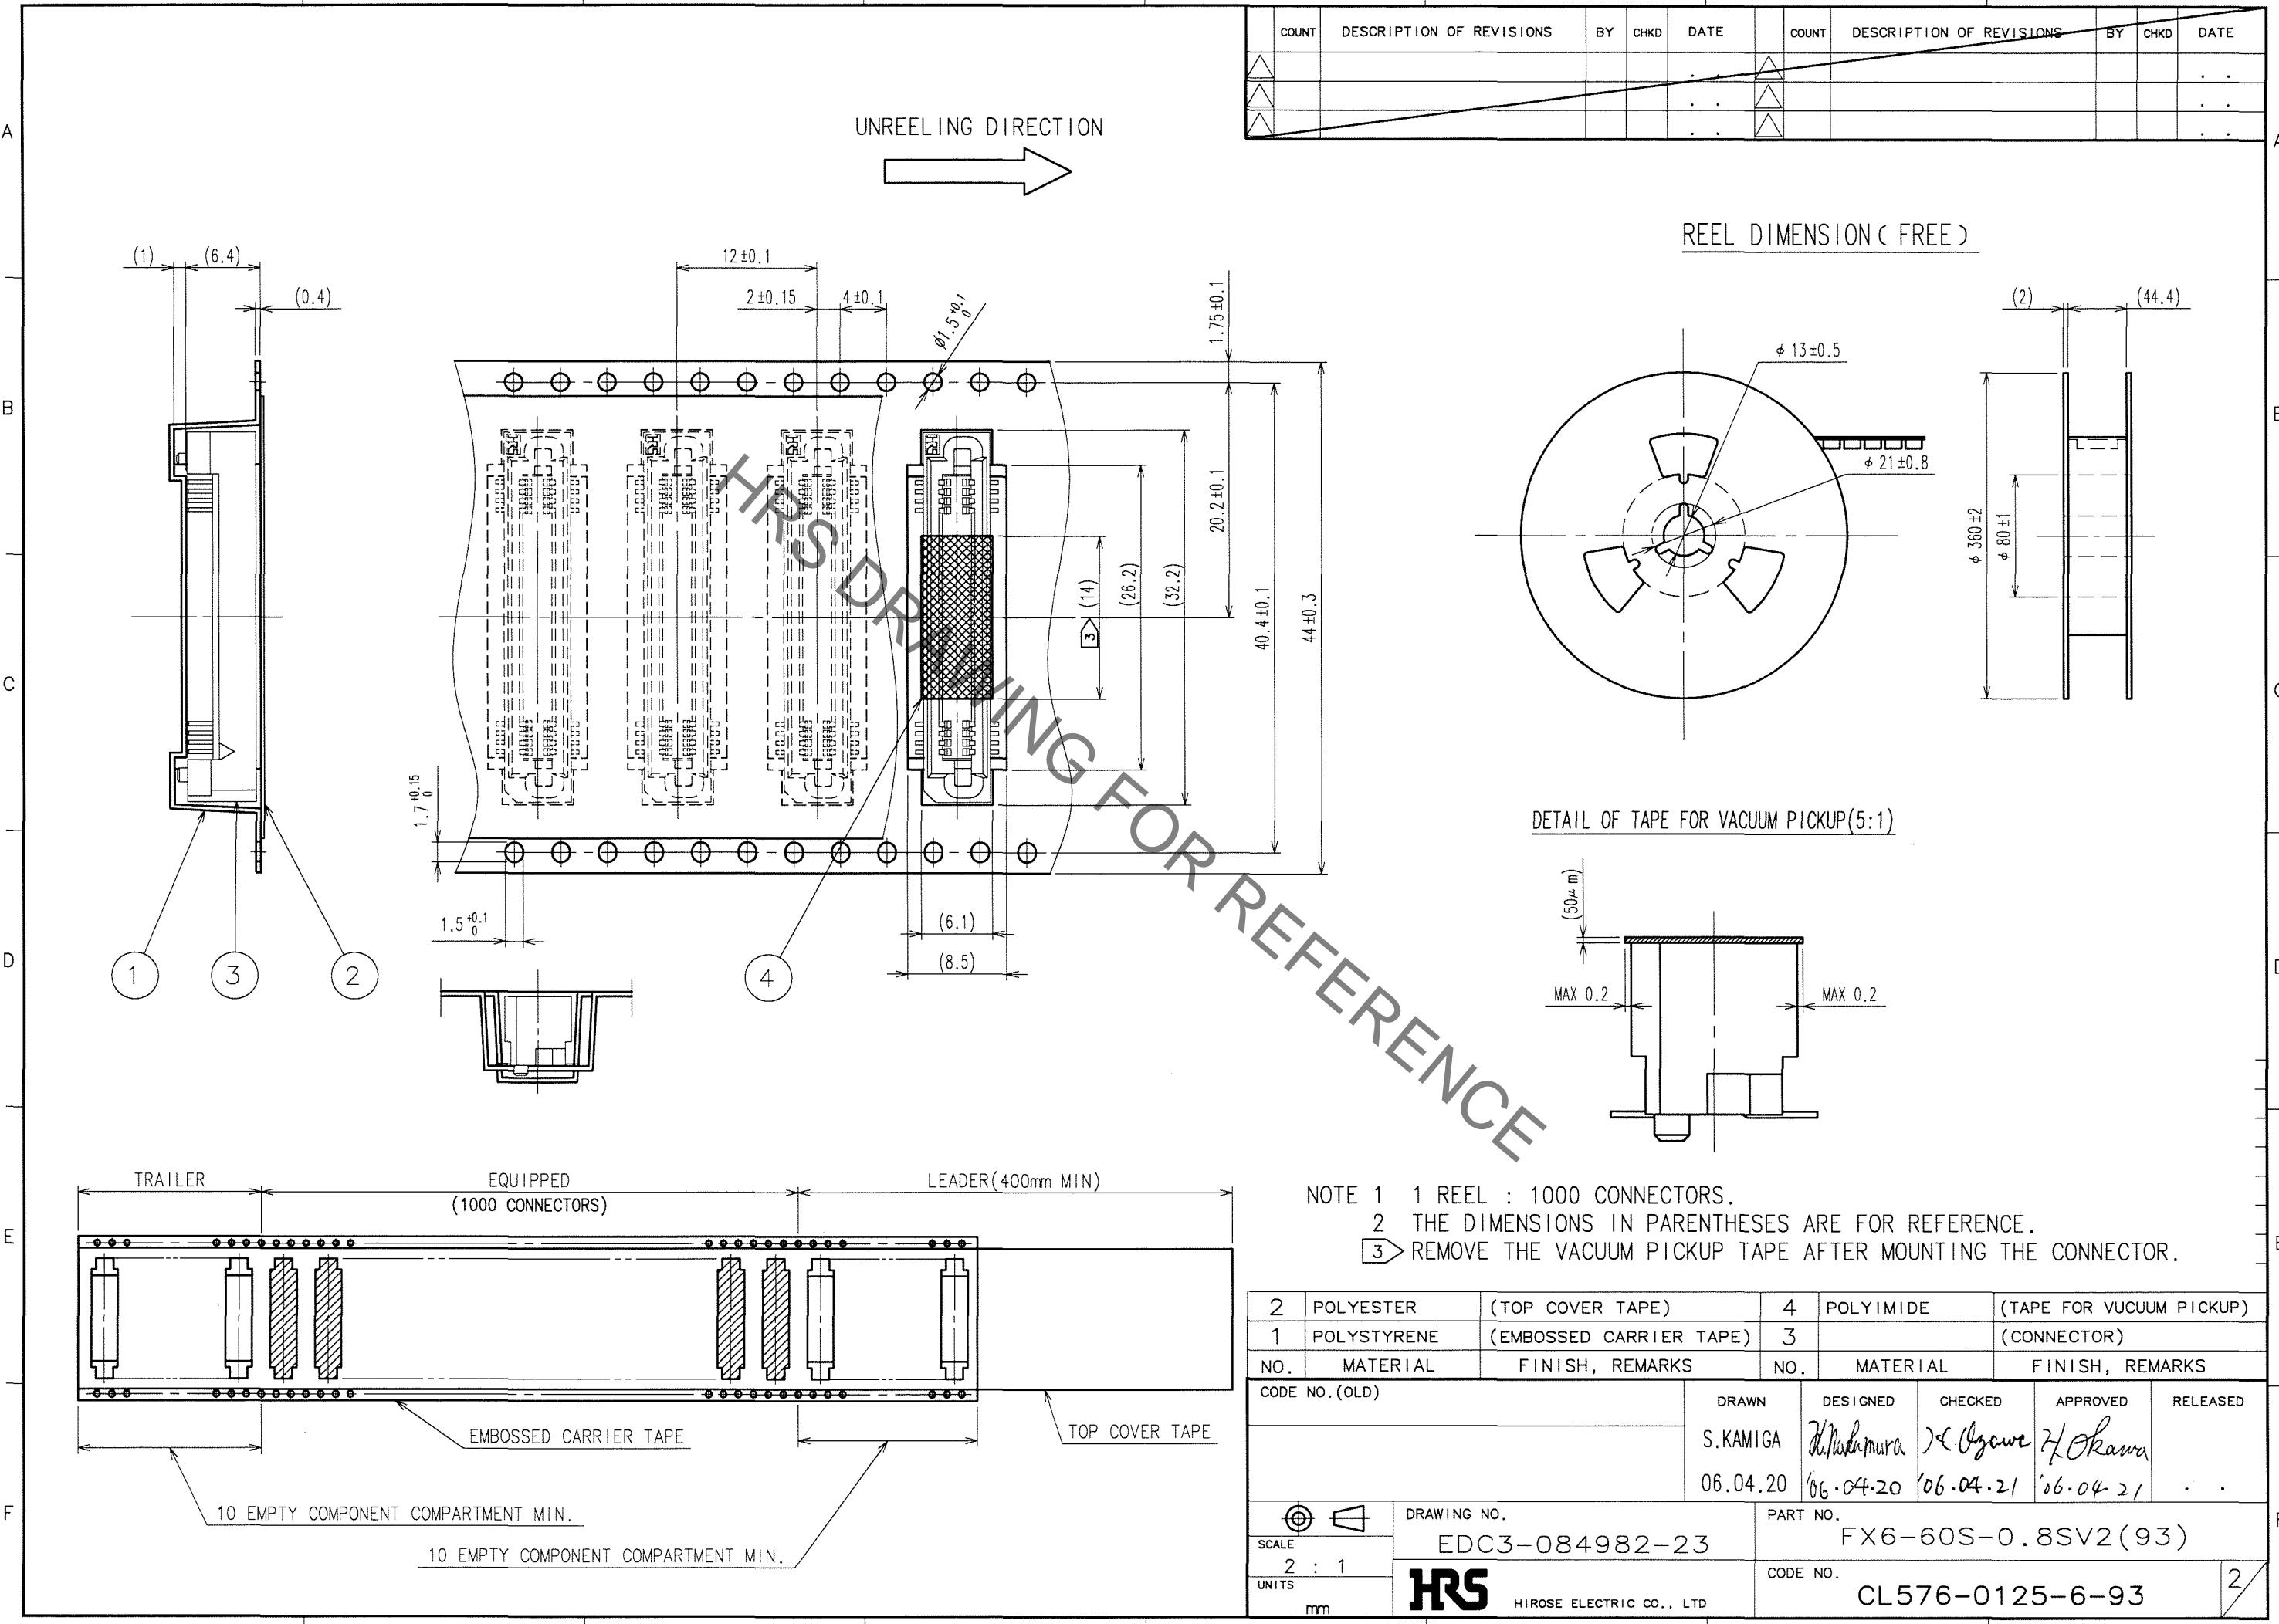

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX6-60S-0.8SV2\(93\)](#)