


Technical drawing of the front view of a mechanical part. The drawing shows a rectangular component with a central vertical slot. Dimensions are indicated as follows:

- Overall width: 23.2 ± 0.05
- Distance from the left edge to the start of the central slot: 2.7 ± 0.05
- Distance from the left edge to the center of the slot: 0.8 ± 0.05
- Distance from the left edge to the center of the slot (alternative dimension): 0.5 ± 0.03
- Distance from the left edge to the center of the slot (alternative dimension): 6.7 ± 0.1
- Distance from the left edge to the center of the slot (alternative dimension): 2.7 ± 0.05

A "POLARIZATION MARK" is indicated on the right side of the component.

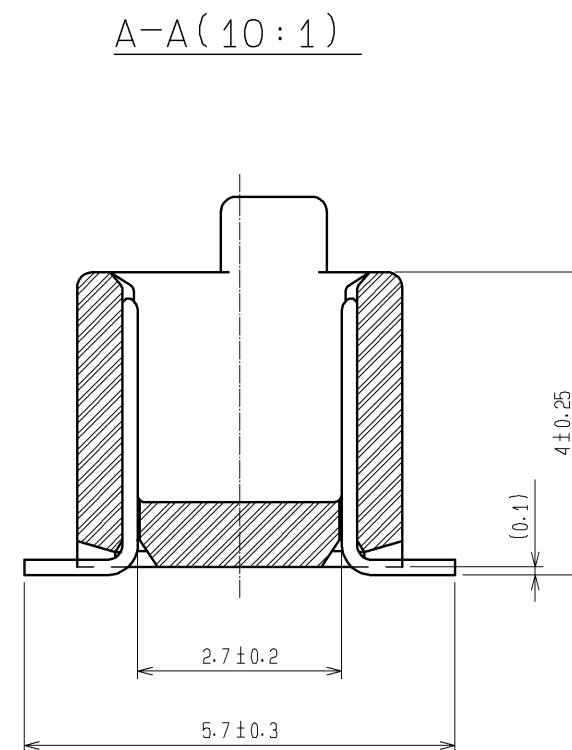

- NOTES ① HRS MARK SHOULD BE OPTIONAL.
2. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 3. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 4. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	PPS	LIGHT BROWN	UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.
						LEAD AREA:GOLD 19H
						UNDER PLATING:NICKEL 1μm min.
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		2 : 1						

HIROSE ELECTRIC CO., LTD.	APPROVED	: HS. OKAWA	08.06.26	DRAWING NO.	EDC3-071324-25
	CHECED	: HT. YAMAGUCHI	08.06.25	PART NO.	FX6A-60P-0.8SV(71)
	DESIGNED	: SY. KAMIGA	08.06.23	CODE NO.	CL576-0205-3-71
	DRAWN	: TP. MATSUMOTO	08.06.18		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX6A-60P-0.8SV\(71\)](#)