


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

A-A (10:1)

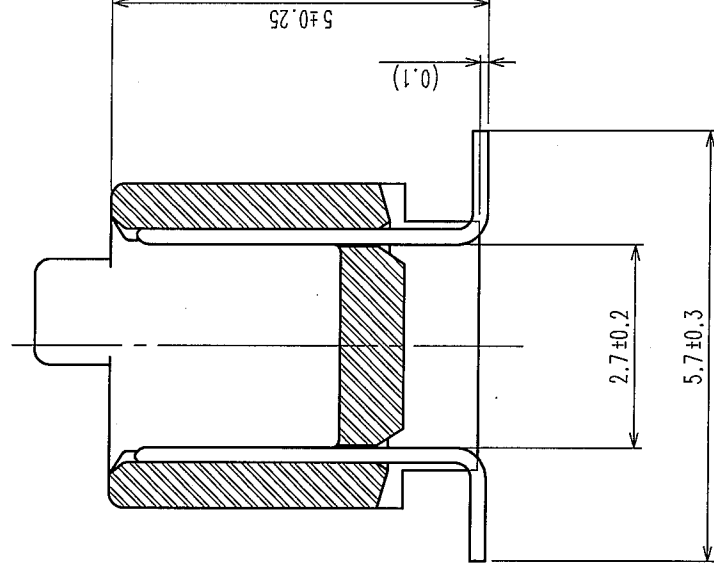

NOTE 1 HRS MARK SHALL BE OPTIONAL.

2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.

3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.




4 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.

5 FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE



ADDED ACCORDING TO CIRCUMSTANCES.

HRS DRAWING FOR REFERENCE

RECOMMENDED P.C.B. LAND PATTERN (MOUNT SIDE)

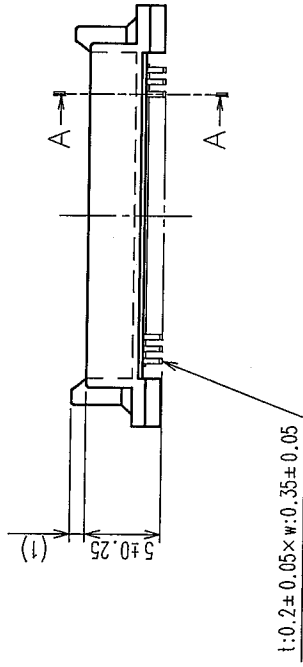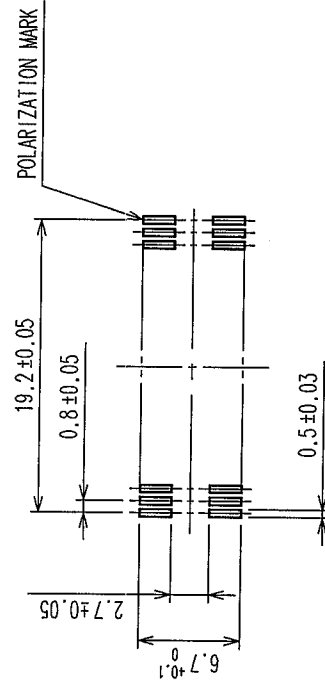

t:0.2±0.05×w:0.35±0.05

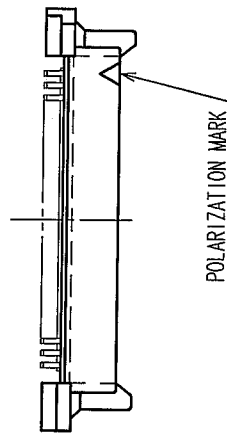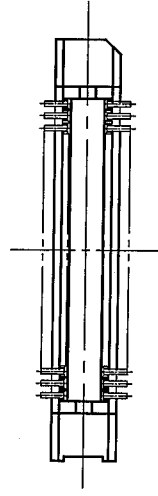

1	POLYPHENYLENE SULFIDE		LIGHT BROWN	UL 94V-0	2	PHOSPHOR BRONZE		CONTACT AREA : GOLD 0.1μm min. LEAD AREA : TIN-PLATING 1μm min. UNDER PLATING : NICKEL 1μm min.				
NO.	MATERIAL		FINISH, REMARKS		NO.	MATERIAL		FINISH, REMARKS				
CODE NO. (OLD) CL			DRAWN Y. AOYAGI '05.09.15		DESIGNED J. Mada '05.09.26		CHECKED J. Ooyama '05.09.26		APPROVED H. Kawa '05.09.26		RELEASED .	
			DRAWING NO. EDC3-071643-22		PART NO. FX6A-50P-0.8SV1 (92)							
SCALE 2 : 1							CODE NO. CL576-0224-8-92					
UNITS mm							HIROSE ELECTRIC CO., LTD					
							1/2					

TO

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX6A-50P-0.8SV1\(92\)](#)