

Unreeling direction

$$12 \pm 0.1$$

4 ± 0.1

1.5 $\begin{smallmatrix} +0.1 \\ 0 \end{smallmatrix}$

1

A

Technical drawing showing a component with a central cross-hatched area and two circular holes at the top. A dimension line indicates a height of 1.7 with a tolerance of +/- 0.15. Another dimension line indicates a width of 1.5 with a tolerance of +/- 0.0.

A technical drawing of a component, likely a connector or a housing. The central part is cross-hatched. The total width is marked as (13) and the width of the central section is marked as (6).

A circular target with a central bullseye and a dashed outer ring. A horizontal dashed line and a vertical dashed line intersect at the center of the target.

Reeled dimensions

Technical drawing of a reel showing dimensions. The outer diameter is $\varnothing 21 \pm 0.8$. The inner hole diameter is $\varnothing 13 \pm 0.5$. A small irregular shape is shown near the bottom left.

Technical drawing of a cylindrical component. The outer diameter is $\phi 330 \pm 2$. The height of the main body is 3 ± 0.5 . A central slot has a width of $\phi 100 \pm 1$. A top cap is shown with a thickness of 7. The drawing includes a vertical dimension line and a horizontal dimension line with a leader pointing to the slot.

$$\begin{array}{r} 4 & + 2 \\ \hline 0 \end{array}$$

The diagram illustrates a cable assembly with a top cover tape and an emboss carrier tape. The assembly is labeled with 'E' at the top and 'F' at the bottom. The top part shows a cross-sectional view of the cable with a central conductor and two outer jackets. A dimension line indicates a width of 8.4 mm. The bottom part shows the cable's longitudinal view. It is labeled 'Trailer' on the left, 'Equipped (1000 connectors)' in the middle, and 'Leader (400mm min)' on the right. The cable is shown with two distinct sections: a shorter 'Trailer' section on the left and a longer 'Leader' section on the right. The 'Equipped (1000 connectors)' section is the transition between them. The 'Emboss carrier tape' is shown as a thin layer above the cable, and the 'Top cover tape' is shown as a thicker layer below it. Arrows point from the labels to their respective parts of the cable assembly.

Notes 6 1 reel : 1000 connectors.




DRAWING NO.	EDC-150678-23-02
PART NO.	FX8-140S-SV(23)
CODE NO.	CL578-0207-1-23


【Precaution】

When a board with multiple connectors mounted is mated, the connector may be damaged or deformed.
Please divide one side of the board so only one connector is mated per board.

OK

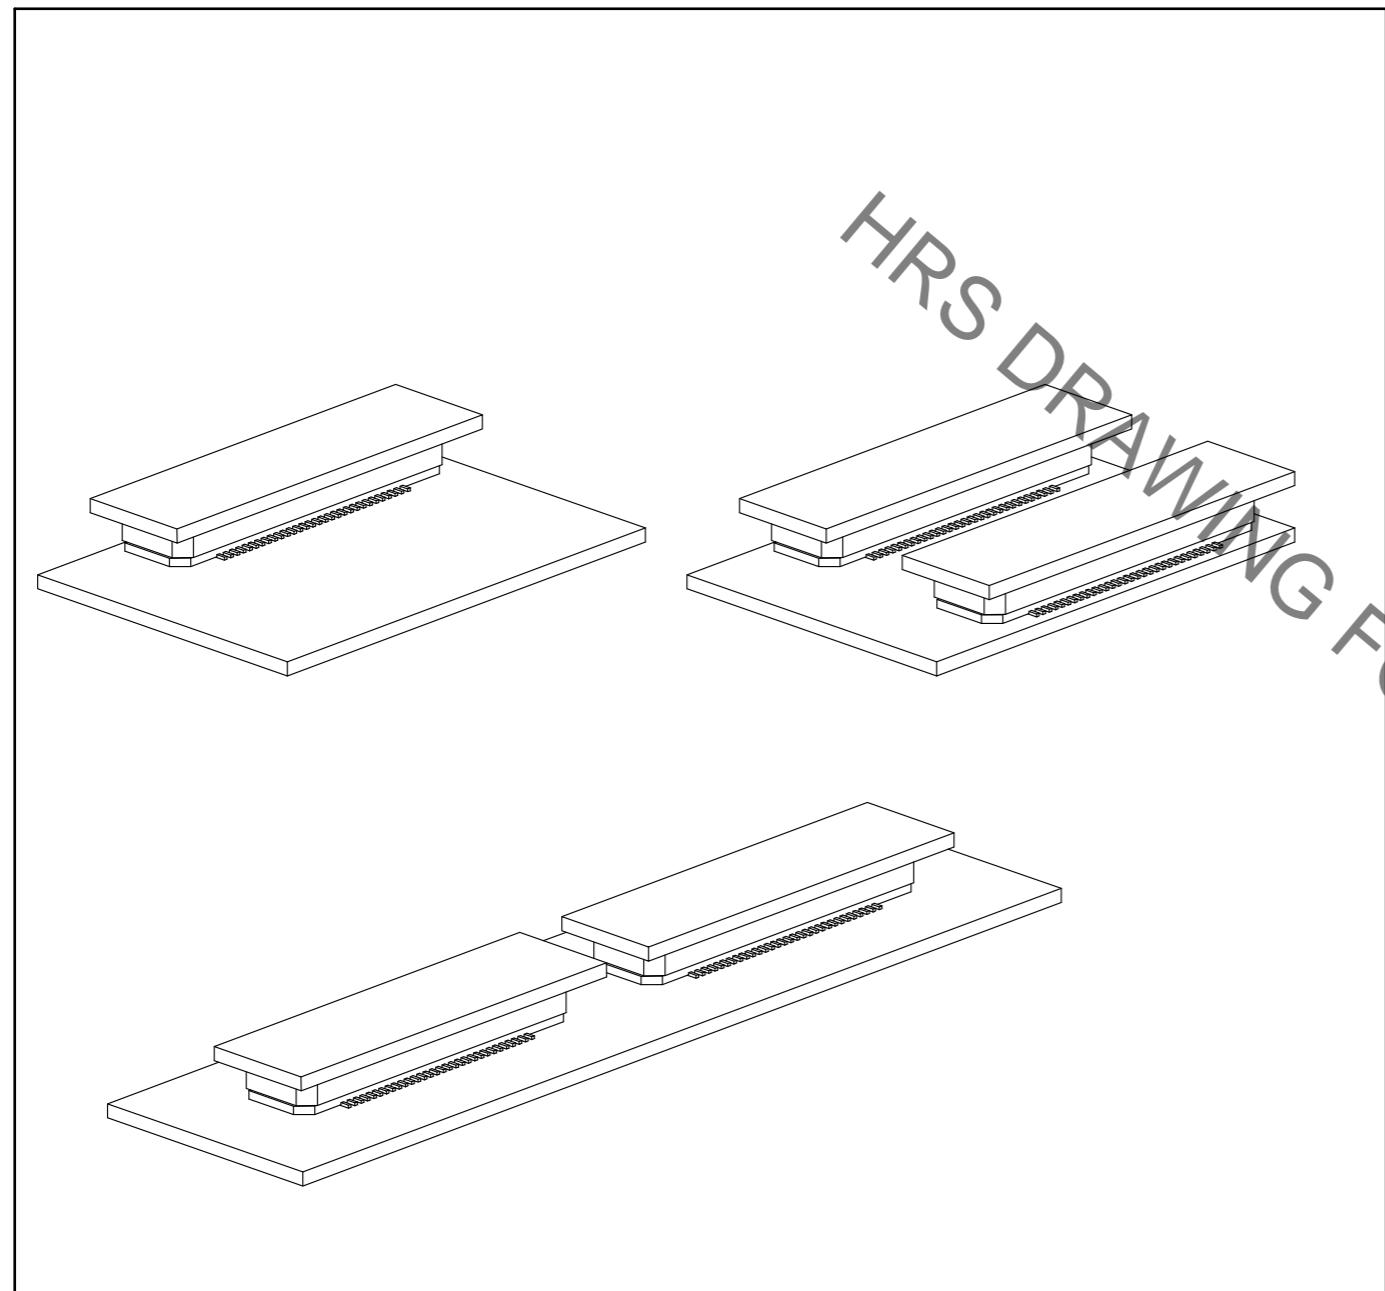

NG

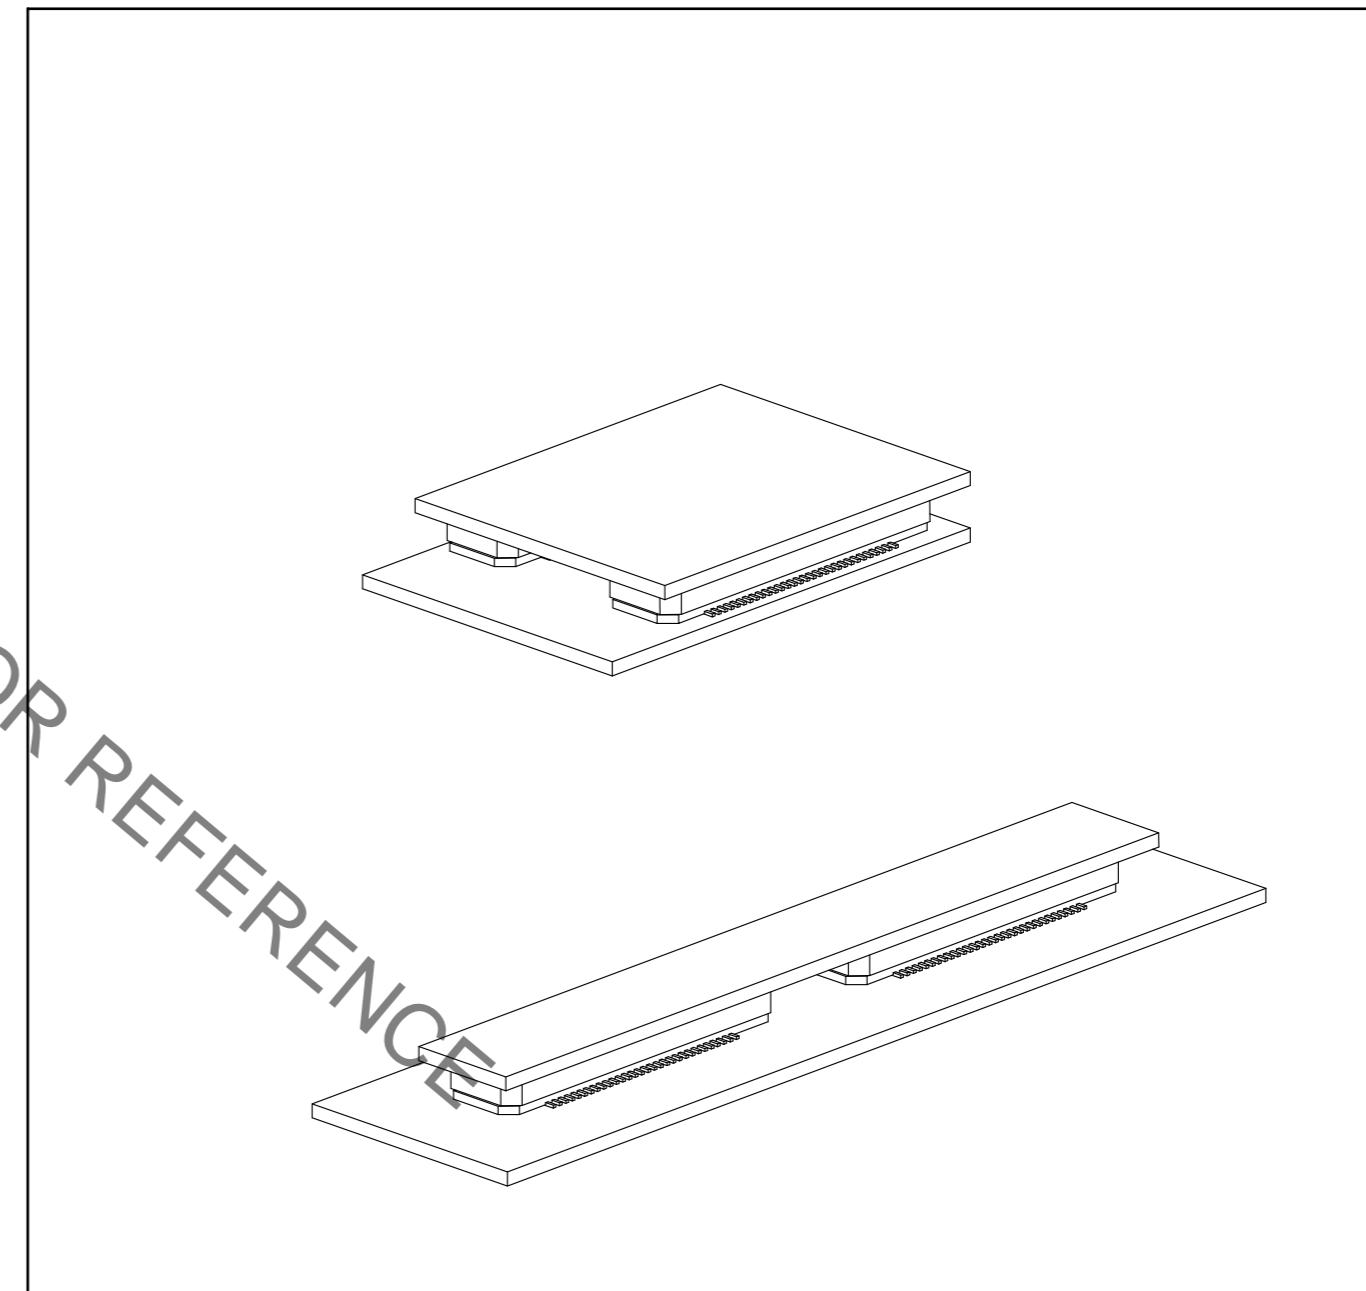

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX8-140S-SV\(23\)](#)