


Aug.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

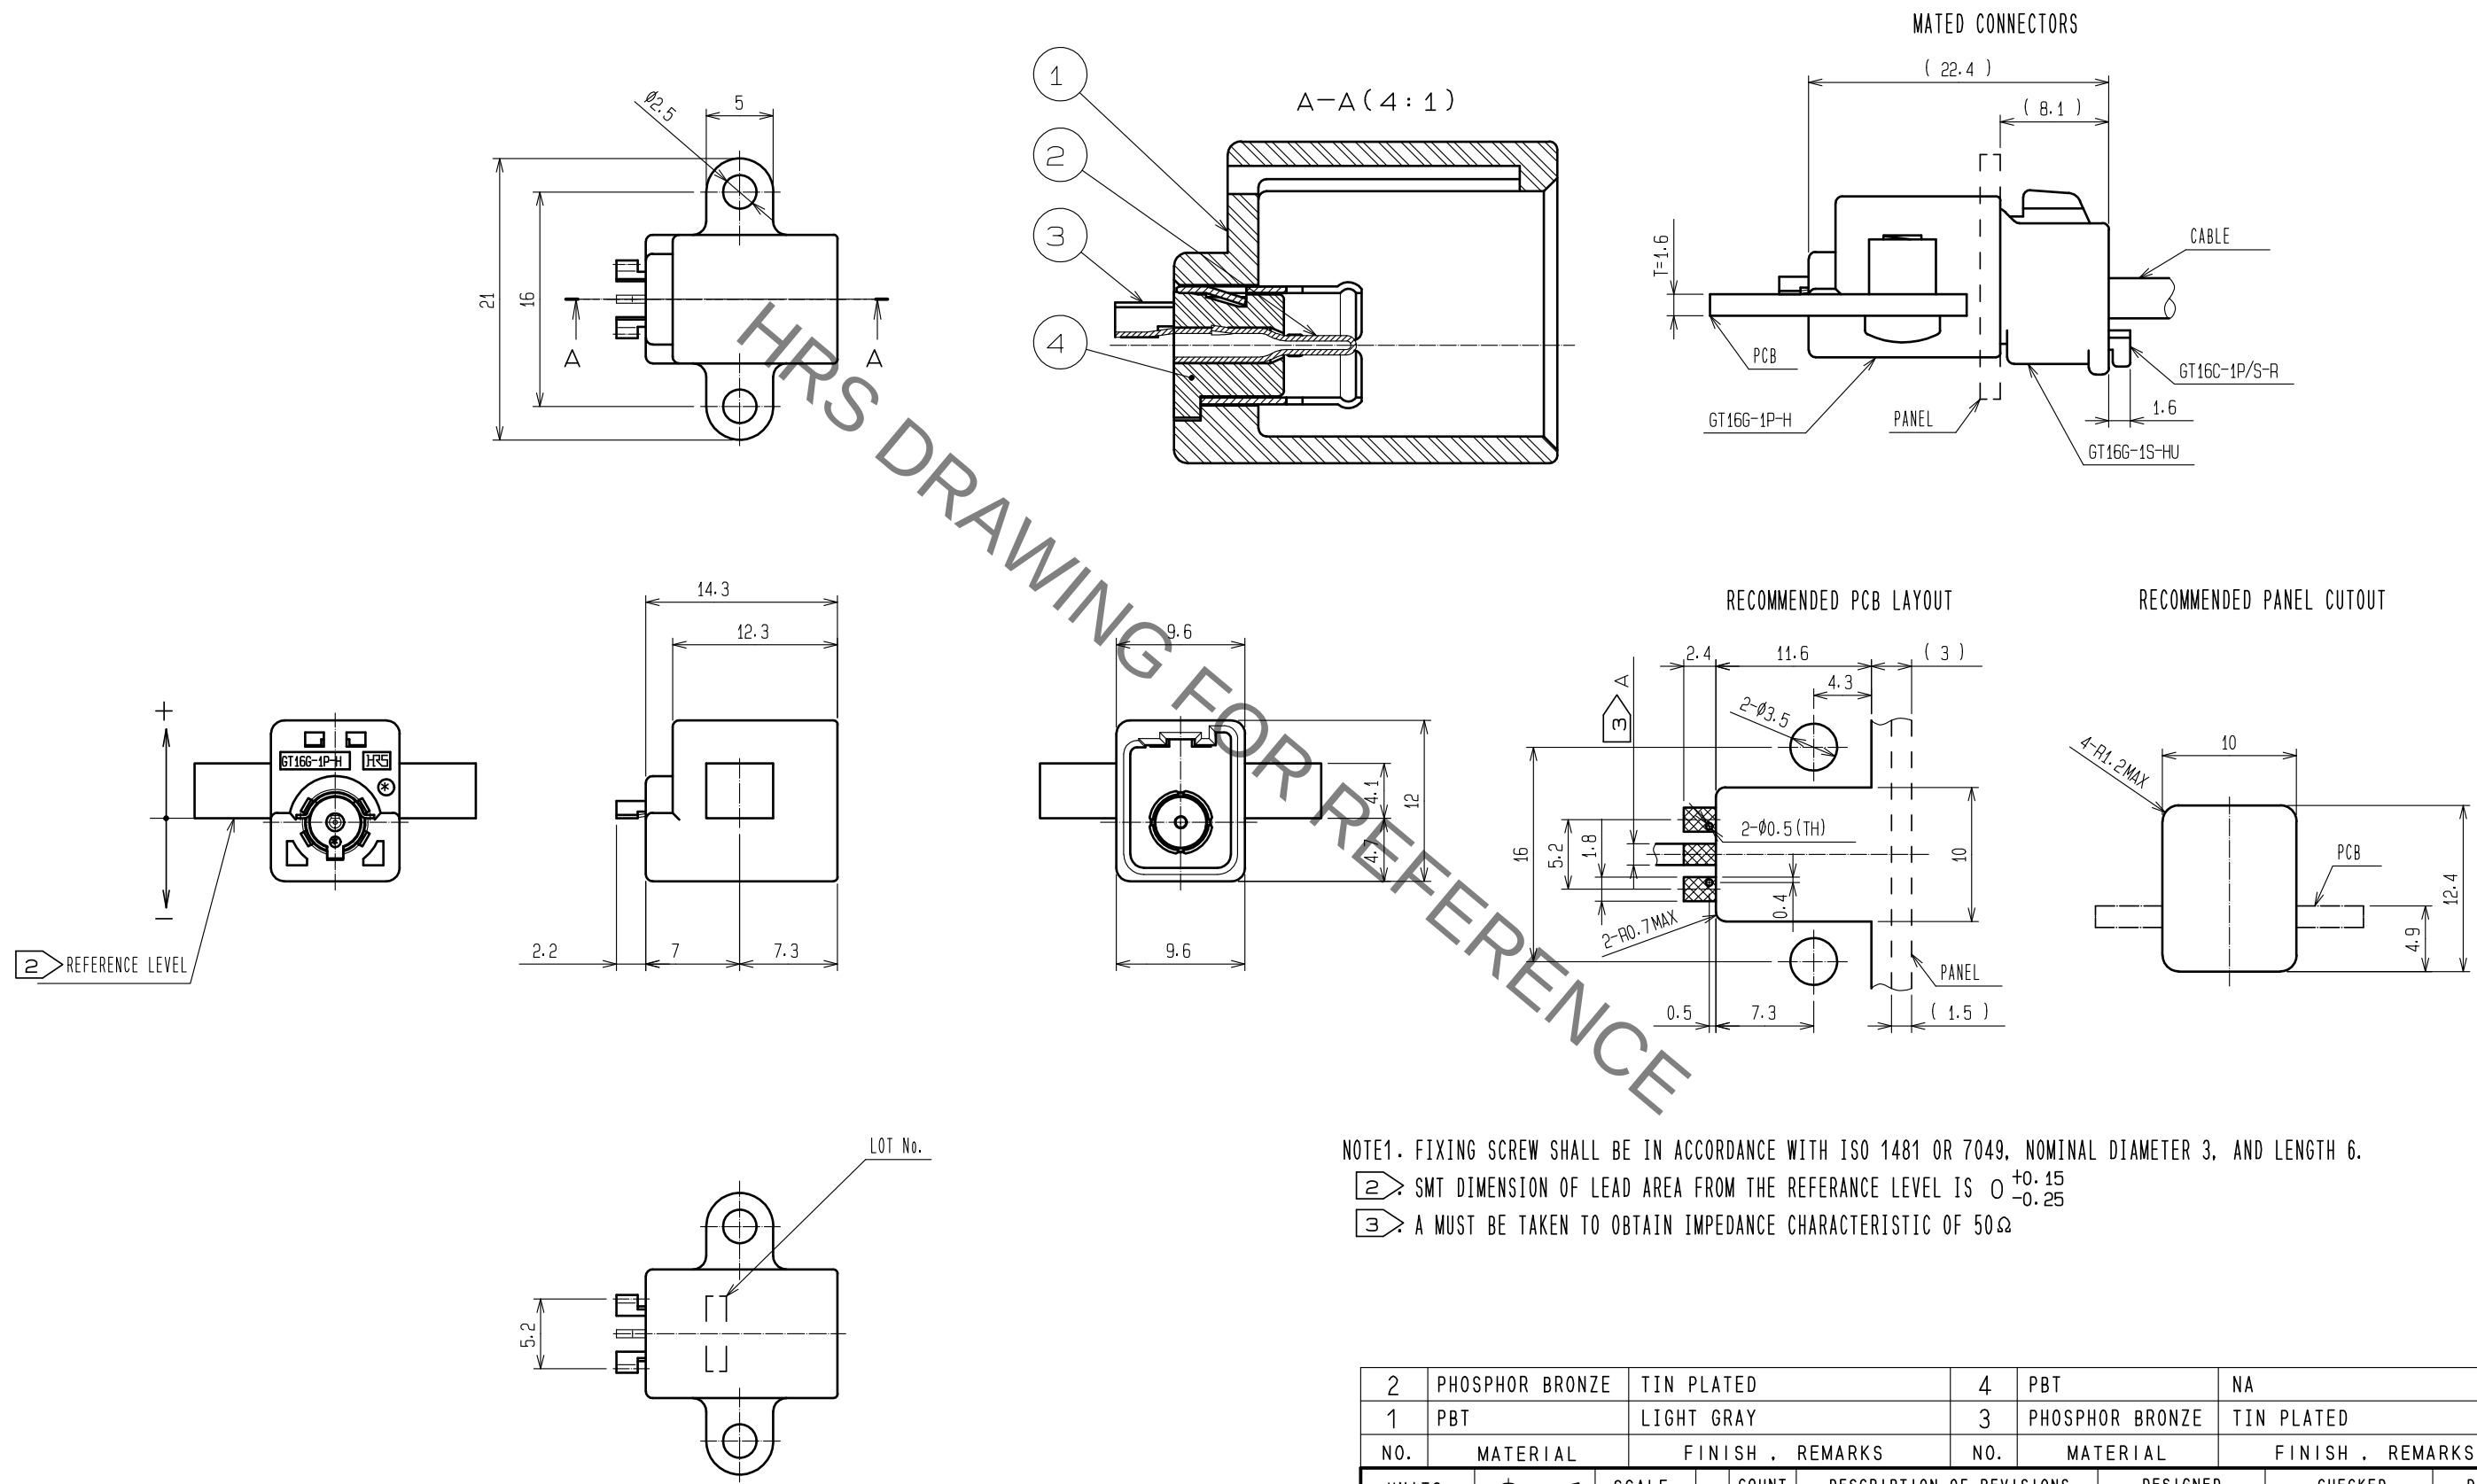

NOTE1. FIXING SCREW SHALL BE IN ACCORDANCE WITH ISO 1481 OR 7049, NOMINAL DIAMETER 3, AND LENGTH 6.

2

SMT DIMENSION OF LEAD AREA FROM THE REFERENCE LEVEL IS

+0.15

-0.25

3

A MUST BE TAKEN TO OBTAIN IMPEDANCE CHARACTERISTIC OF 50Ω

2	PHOSPHOR BRONZE	TIN PLATED	4	PBT	NA		
1	PBT	LIGHT GRAY	3	PHOSPHOR BRONZE	TIN PLATED		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED	: NH. NAKATA	15. 08. 08	DRAWING NO. EDC-165983-00-00		
		CHECKED	: KI. HIROKAWA	15. 08. 07	PART NO. GT16G-1P-H		
		DESIGNED	: NK. IKUTA	15. 08. 06	CODE NO. CL766-0021-0-00		
		DRAWN	: NK. IKUTA	15. 08. 06			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[GT16G-1P-H](#)