

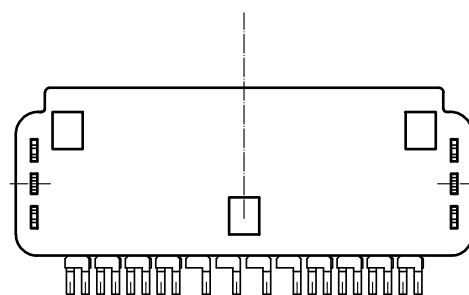
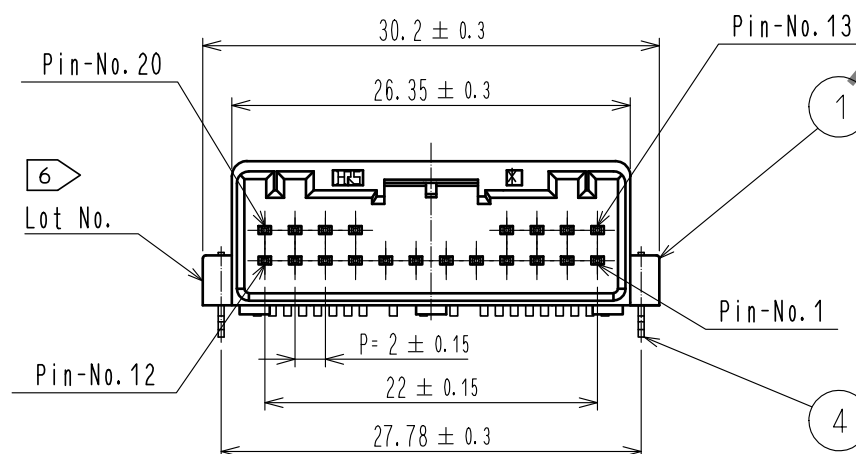
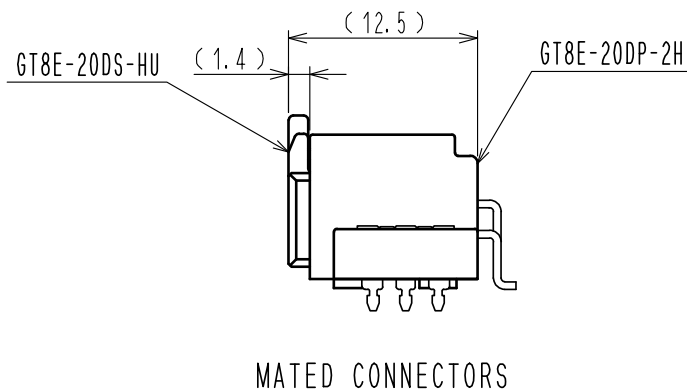
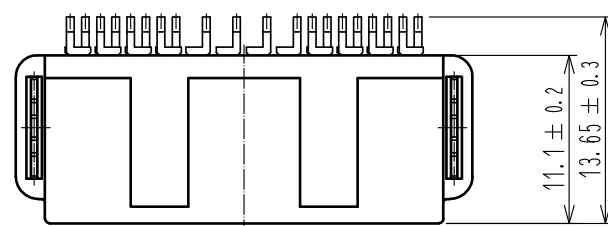
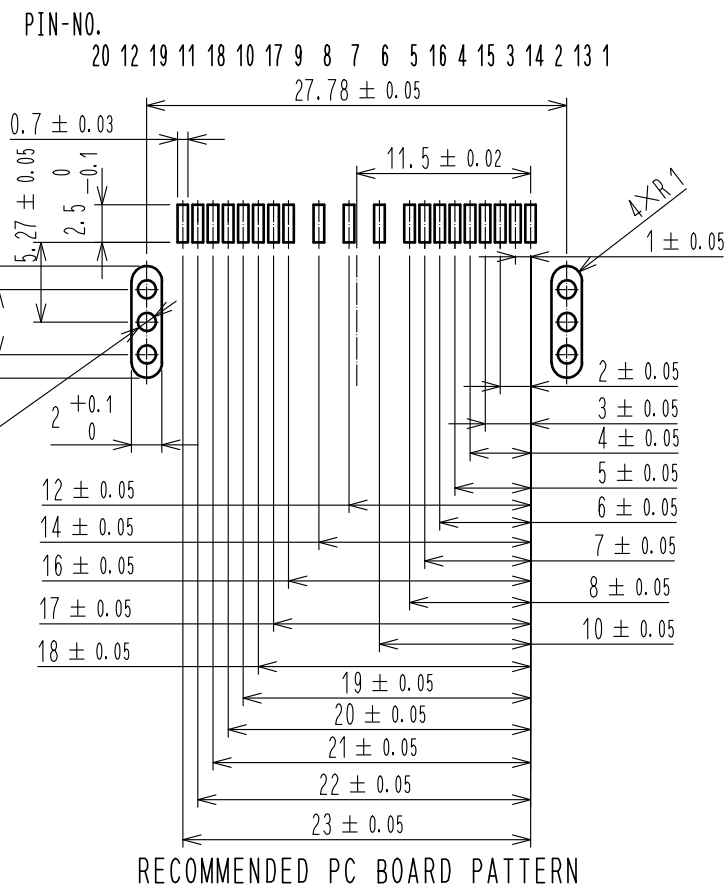


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV. RoHS COMPLIANT

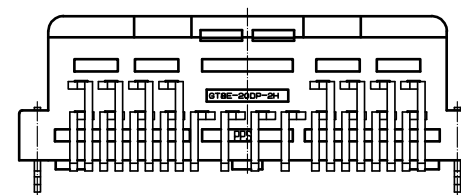


- NOTE1. RECOMMENDED TEMPERATURE PROFILE FOR REFLOW (REFER TO RIGHT FIG.)
USED REFLOW SYSTEM
: IR IN THE AIR OR NITROGEN
NO. OF CYCLES : 2 MAX
PEAK : 250°C
OVER 230°C : 20~40s
PREHEAT : 150~180°C (60~120s)
NOTE2. TEMPERATURE FOR SOLDERING IRON : 280~300°C WITHIN 2s
NOTE3. CO-PLANARITY SHALL BE 0.1 MAX
NOTE4. PC BOARD THICKNESS=1.6
NOTE5. RECOMMENDED SOLDER THICKNESS=0.15
MARKING OF Lot No. :
(EX)2015.8th. June → 15F08---5DIGITS

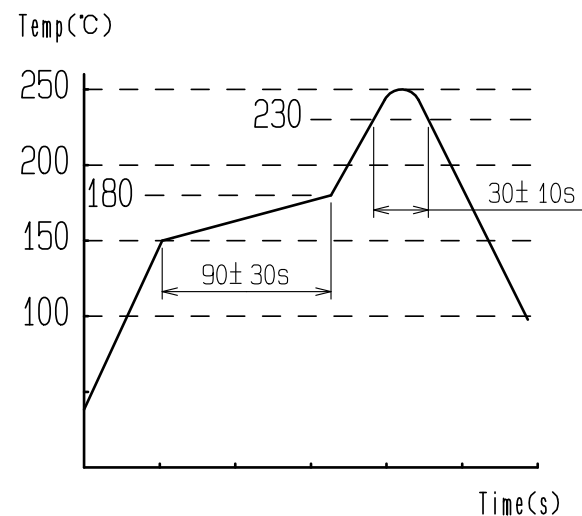

PACKAGING STYLE


1. Place connectors into on embossed carrier tape.

← Pulling out direction

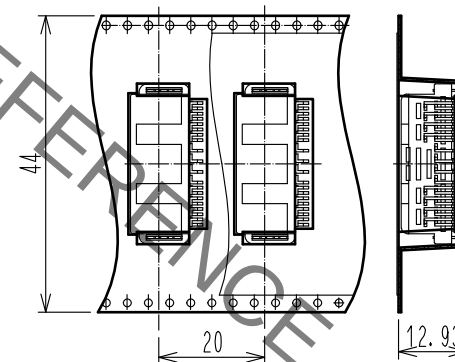

2. Put a reel into a cardboard.

W = (405) (mm)
D = (405) (mm)
H = (51) (mm)

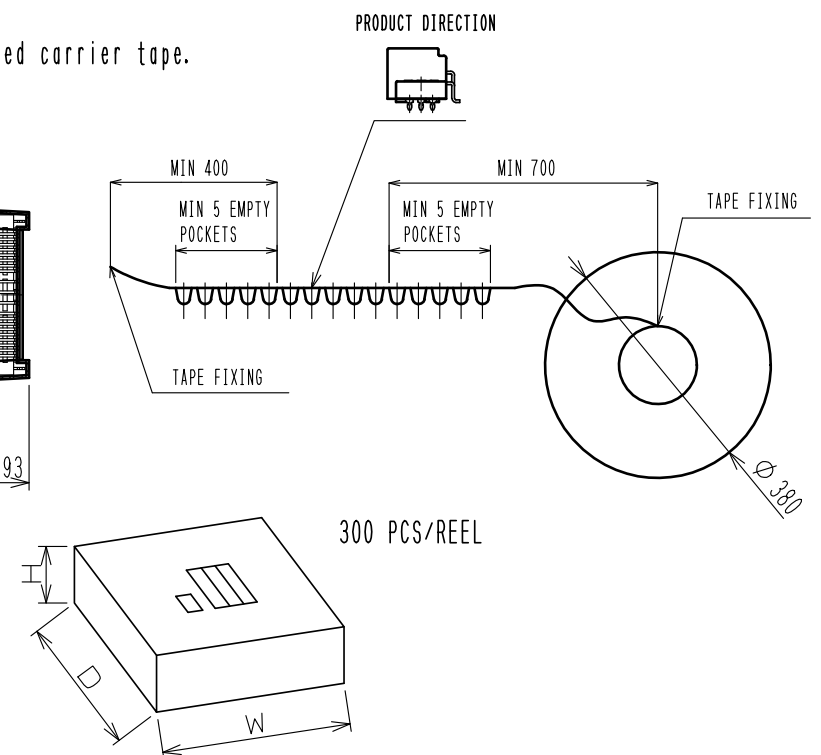

2	BRASS	TIN PLATING	4	BRASS	TIN PLATING
1	PPS	BLACK	3	BRASS	TIN PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
		APPROVED : HH. TSUKUMO		DRAWING NO. EDC-167886-55-00	
		CHECKED : HH. TSUKUMO		PART NO. GT8E-20DP-2H(55)	
		DESIGNED : DONGCHAN KIM		CODE NO. CL758-1010-4-55	
		DRAWN : YK. MITSUISHI			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[GT8E-20DP-2H\(55\)](#)