

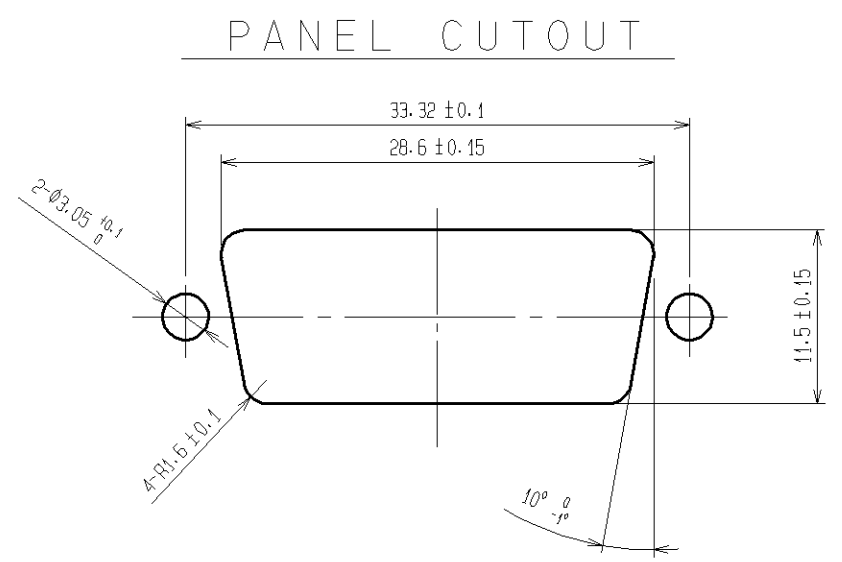
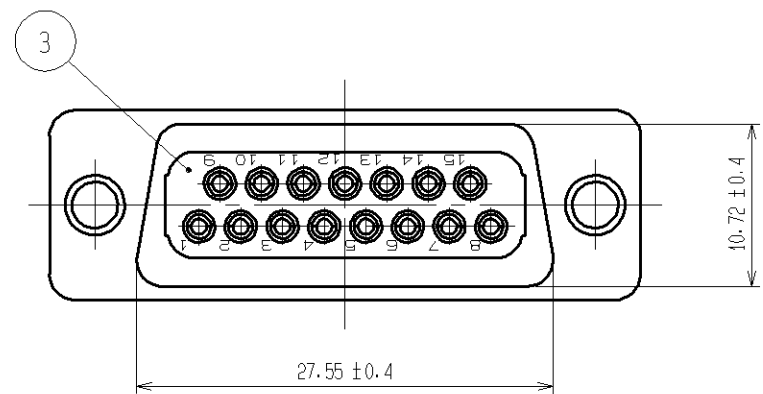
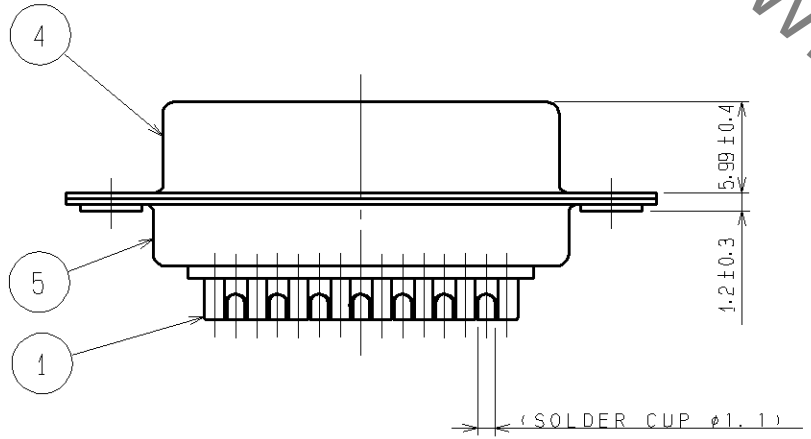


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

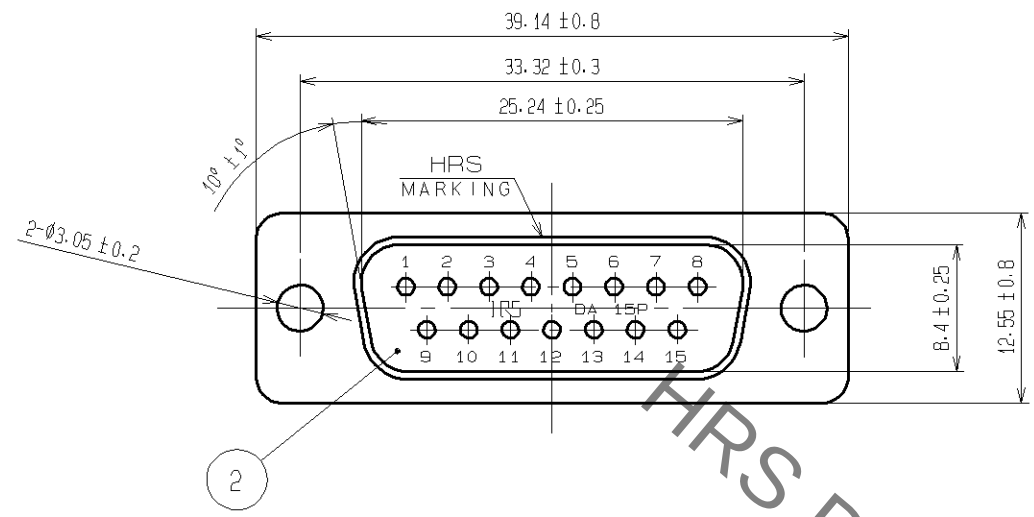

NOTE 1. SOLDERING SHALL BE DONE WITH SOLDERING BIT OF 40W MAX.

3	PBT	BLACK (UL94V-0)			
2	PBT	BLACK (UL94V-0)	5	STEEL	NICKEL PLATING
1	PHOSPHOR BRONZE	GOLD PLATING	4	STEEL	NICKEL PLATING
NO.	MATERIAL	FINISH. REMARKS	NO.	MATERIAL	FINISH. REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
HIROSE ELECTRIC CO., LTD.		APPROVED : HO.MIWA	06.07.13	DRAWING NO. EDC3-009503-01	
		CHECKED : YH.ENAMI	06.07.12	PART NO. HDAB-15P(05)	
		DESIGNED : TU.TANIGUCHI	06.07.12	CODE NO. CL211-0234-1-05	
		DRAWN : MT.ITANO	06.07.12		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HDAB-15P\(05\)](#)