
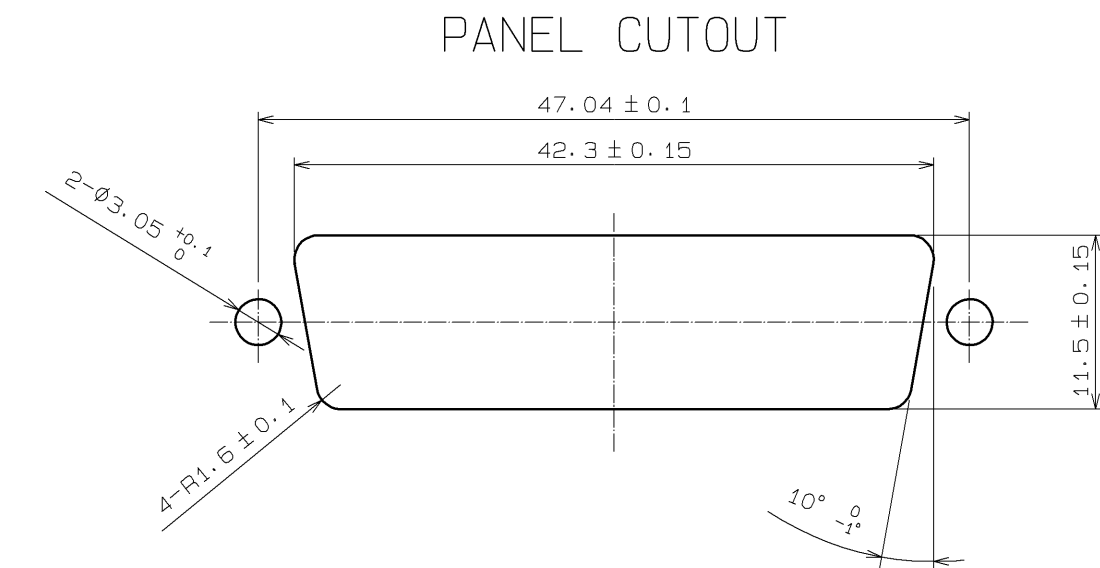
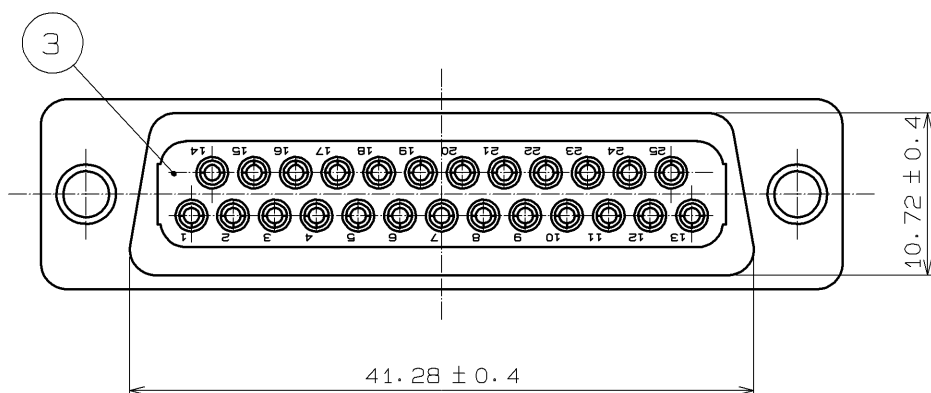
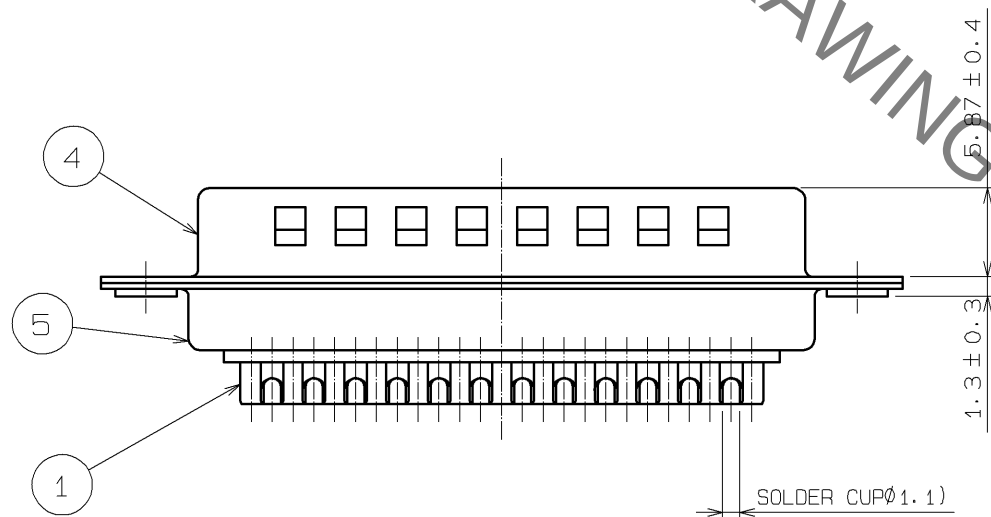


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

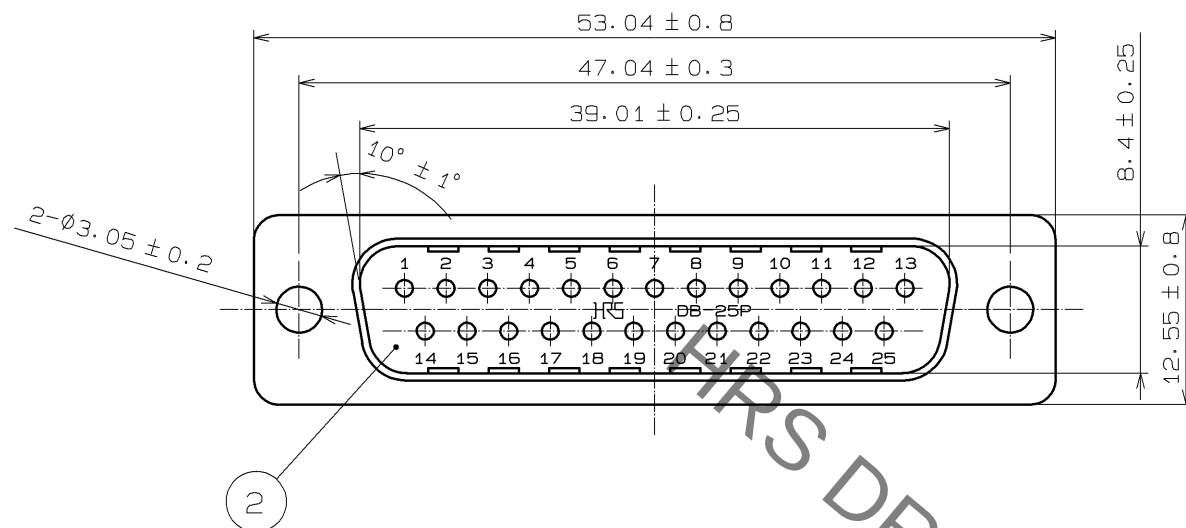

NOTE 1. SOLDERING SHALL BE DOWN WITH SOLDERING BIT OF 40W MAX WITHIN 4s.
2 CONTACT AREA:GOLD PLATING $0.2\mu\text{m}$ MIN
TERMINAL AREA:GOLD PLATING $0.03\mu\text{m}$ MIN
UNDER PLATING:NICKEL PLATING $1\mu\text{m}$ MIN

3	PBT	UL94V-0 BLACK	5	STEEL	SURFACE PLATING : NICKEL 2μm min. UNDER PLATING : COPPER 5μm min.				
2	PBT	UL94V-0 BLACK							
1	PHOSPHOR BRONZE	2							
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
	HIROSE ELECTRIC CO., LTD.	APPROVED : YH. ENAMI		09.01.29		DRAWING NO. EDC3-022424-01			
		CHECED : HO. MIWA		09.01.29		PART NO. HDBB-25PF (05)			
		DESIGNED : YH. MAMADA		09.01.28		CODE NO. CL211-0564-6-05			
		DRAWN : YH. MAMADA		09.01.28		1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HDBB-25PF\(05\)](#)