
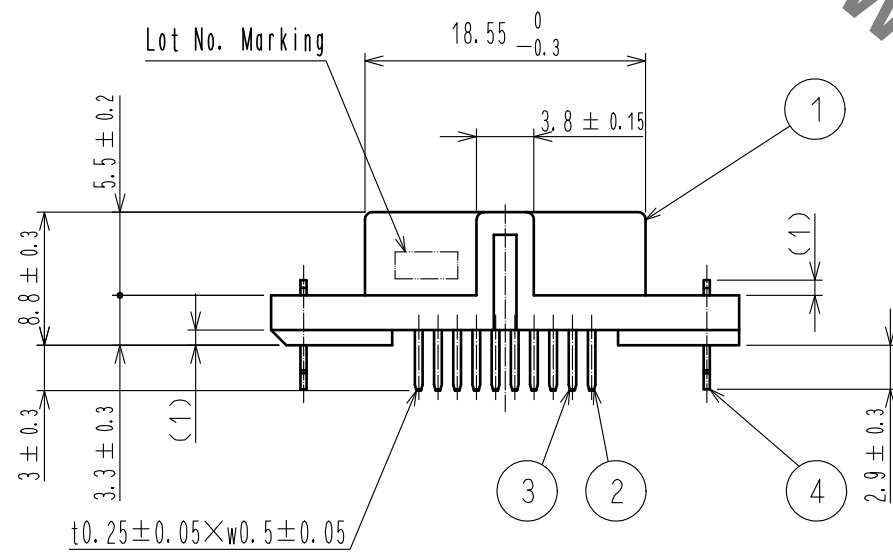
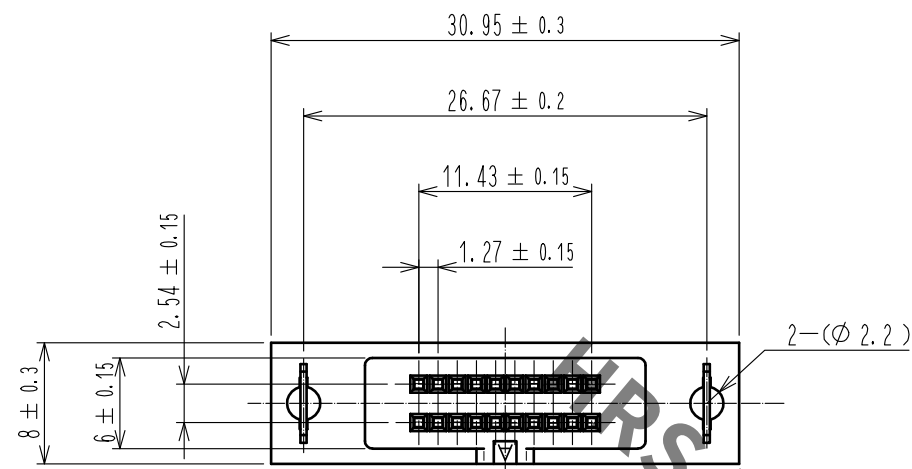
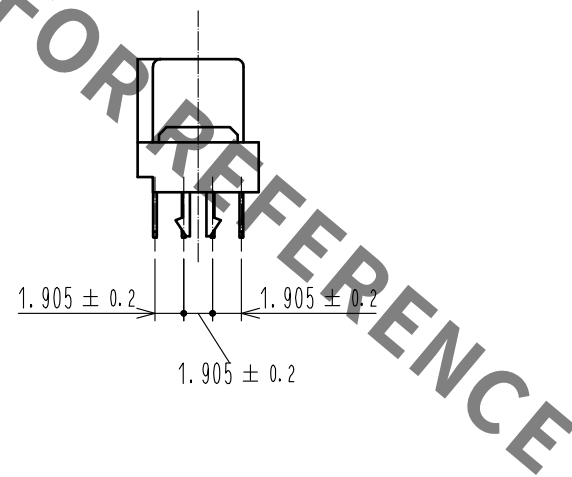


Recommended PC board hole pattern (mounting side)

Polarizing guide key side

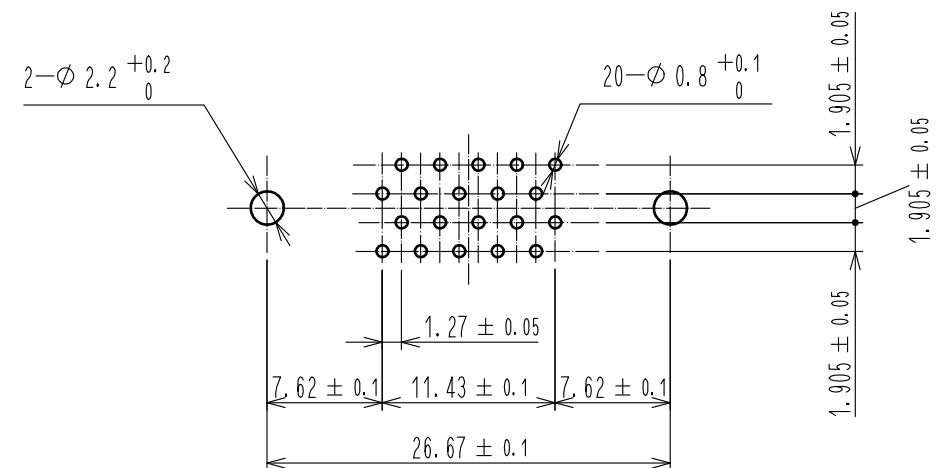

Notes 1 The dimensions in parentheses are for reference.

2	COPPER ALLOY	Contact area : Gold 0.2μm min	4	PHOSPHOR BRONZE	Tin-Plating
		Dip area : TIN-Plating 2μm min	3	COPPER ALLOY	Contact area : Gold 0.2μm min
		Under plating : Nickel 2.5μm min			Dip area : TIN-Plating 2μm min
1	PBT	BLACK UL94V-0			Under plating : Nickel 2.5μm min
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	
HIROSE ELECTRIC CO., LTD.		APPROVED : HT. YAMAGUCHI	18.06.25	DRAWING NO. EDC-019317-71-21	
		CHECKED : HT. YAMAGUCHI	18.06.25	PART NO. HIF6B-20DA-1.27DSAL(71)	
		DESIGNED : TY. EDAGAWA	18.06.25	CODE NO. CL631-0451-7-71	
		DRAWN : MK. OKI	18.06.21		
		DESIGNED		CHECKED	DATE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HIF6B-20DA-1.27DSAL\(71\)](#)