

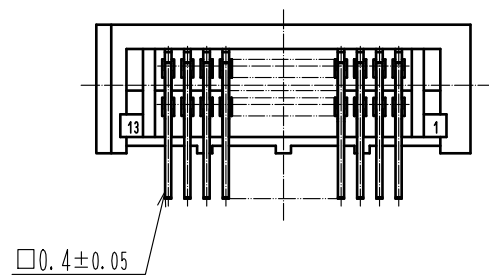
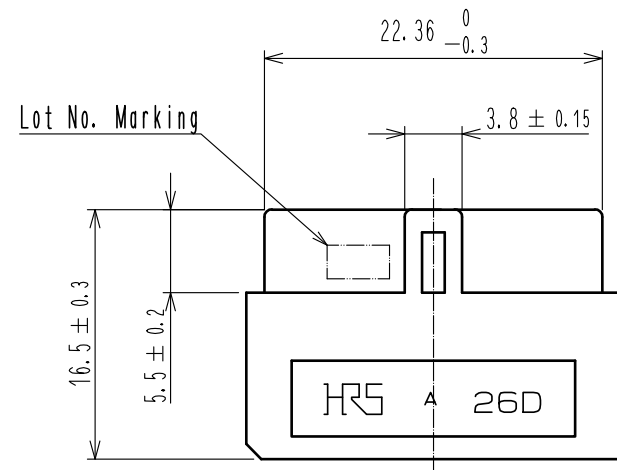
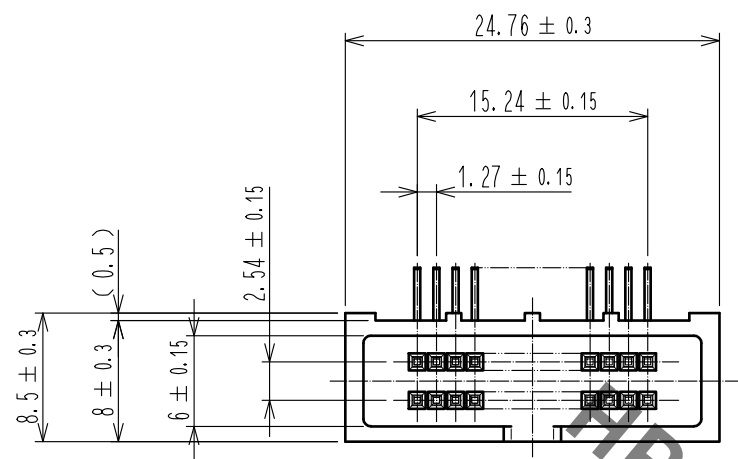


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

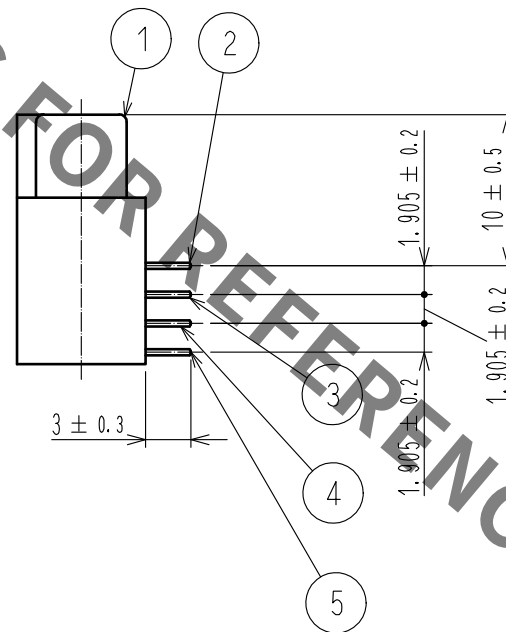


Recommended PC board hole pattern (mounting side)

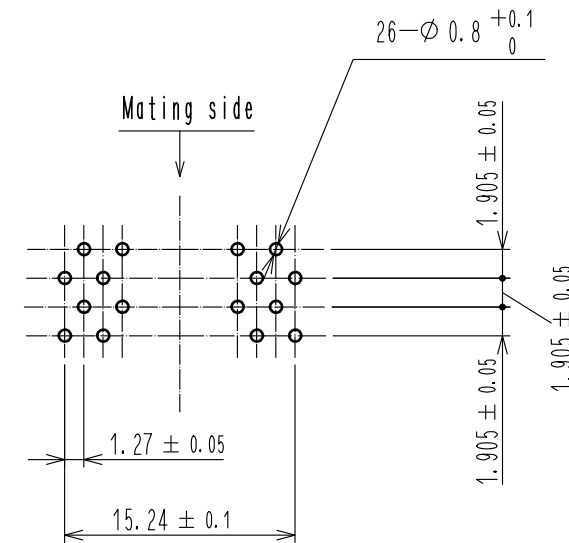

Notes 1 The dimensions in parentheses are for reference.

3	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min. Dip area : TIN-Plating 2μm min. Under plating : Nickel 2.5μm min.	5	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min. Dip area : TIN-Plating 2μm min. Under plating : Nickel 2.5μm min.		
2	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min. Dip area : TIN-Plating 2μm min. Under plating : Nickel 2.5μm min.			4	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min. Dip area : TIN-Plating 2μm min. Under plating : Nickel 2.5μm min.
1	PBT	BLACK UL94V-0					Contact area : Gold 0.2μm min. Dip area : TIN-Plating 2μm min. Under plating : Nickel 2.5μm min.
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL			FINISH , REMARKS

UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED		: HT. YAMAGUCHI	18.06.25	DRAWING NO. EDC-019015-71-21		
		CHECKED		: HT. YAMAGUCHI	18.06.25	PART NO. HIF6A-26DA-1.27DS(71)		
		DESIGNED		: TY. EDAGAWA	18.06.25	CODE NO. CL631-0002-3-71		
		DRAWN		: MK. OKI	18.06.21	 1/1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HIF6A-26DA-1.27DS\(71\)](#)