

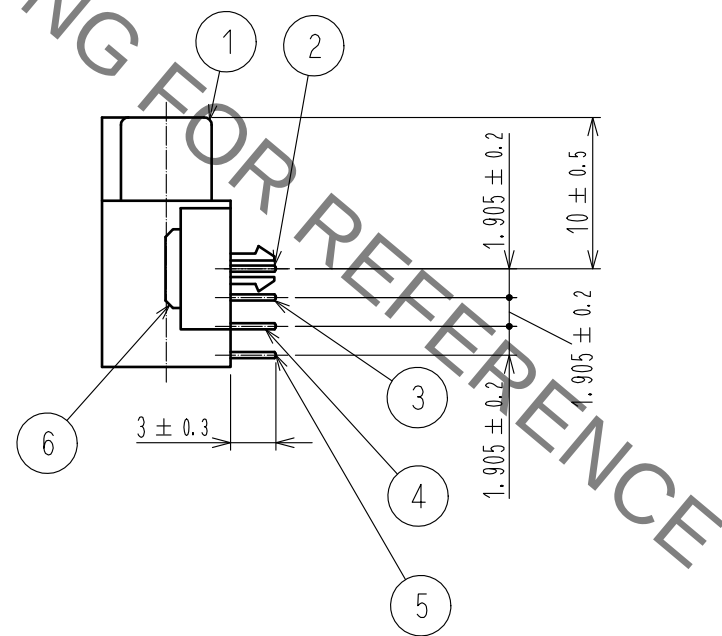
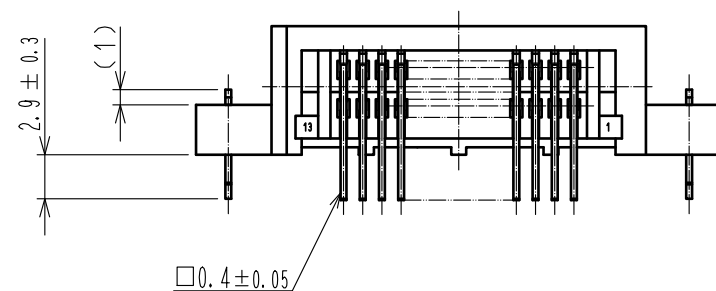
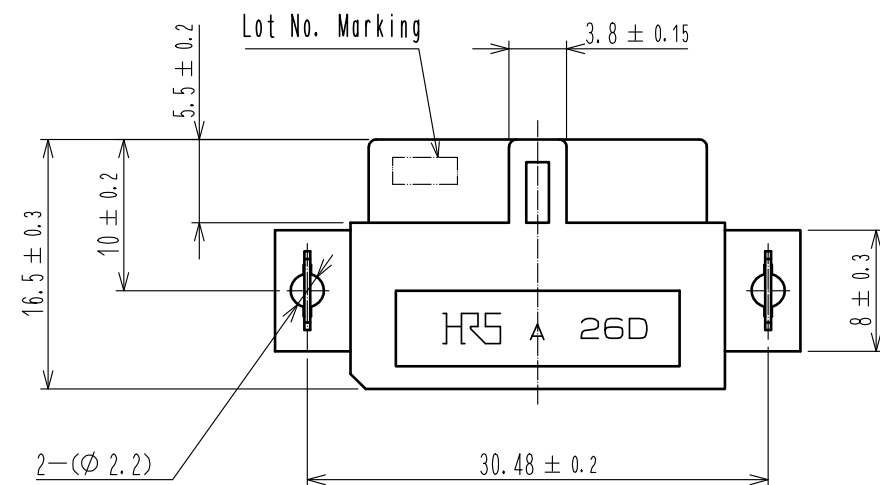


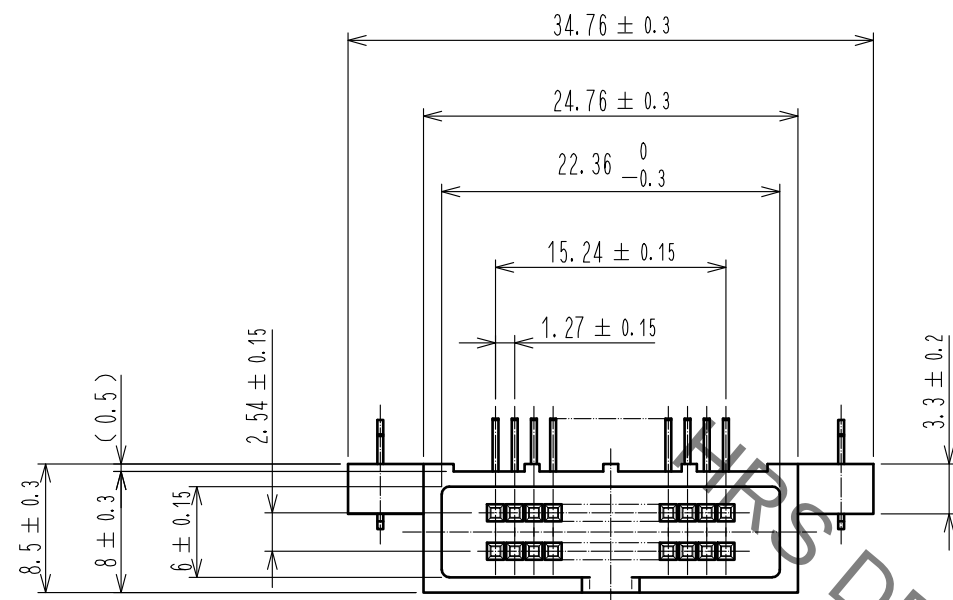

Recommended PC board hole pattern (mounting side)

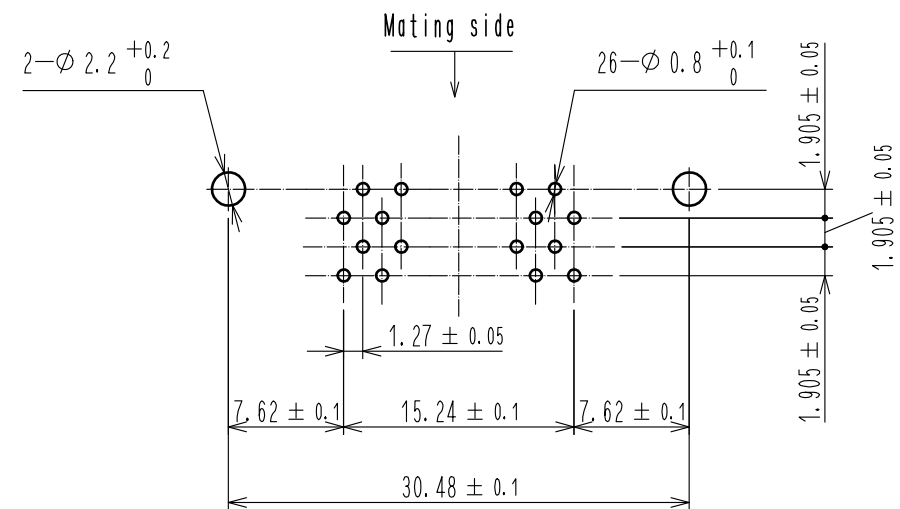

Notes 1 The dimensions in parentheses are for reference.

3	PHOSPHOR BRONZE	Contact Area : Gold 0.2μm min.	6	PHOSPHOR BRONZE	TIN-Plating
		Dip Area : TIN-Plating 2μm min.	5	PHOSPHOR BRONZE	Contact Area : Gold 0.2μm min.
		Under Plating : Nickel 2.5μm min.			Dip Area : TIN-Plating 2μm min.
2	PHOSPHOR BRONZE	Contact Area : Gold 0.2μm min.	4	PHOSPHOR BRONZE	Contact Area : Gold 0.2μm min.
		Dip Area : TIN-Plating 2μm min.			Dip Area : TIN-Plating 2μm min.
1	PBT	BLACK UL94V-0			Under Plating : Nickel 2.5μm min.
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	
DESIGNED		CHECKED		DATE	
APPROVED : HT. YAMAGUCHI		18.06.25		DRAWING NO. EDC-019307-71-21	
CHECKED : HT. YAMAGUCHI		18.06.25		PART NO. HIF6B-26DA-1. 27DSL(71)	
DESIGNED : TY. EDAGAWA		18.06.25		CODE NO. CL631-0402-1-71	
DRAWN : MK. OKI		18.06.21			

HRS HIROSE ELECTRIC CO., LTD.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HIF6B-26DA-1.27DSL\(71\)](#)