

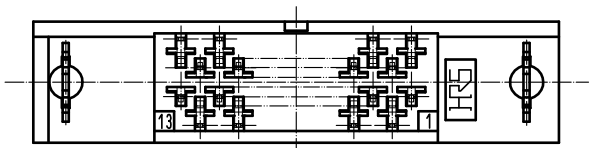
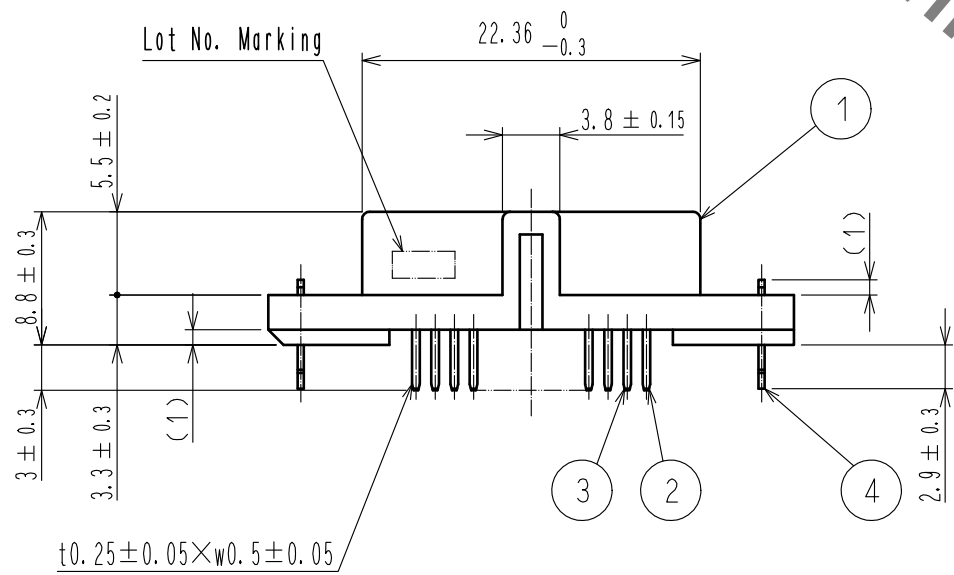
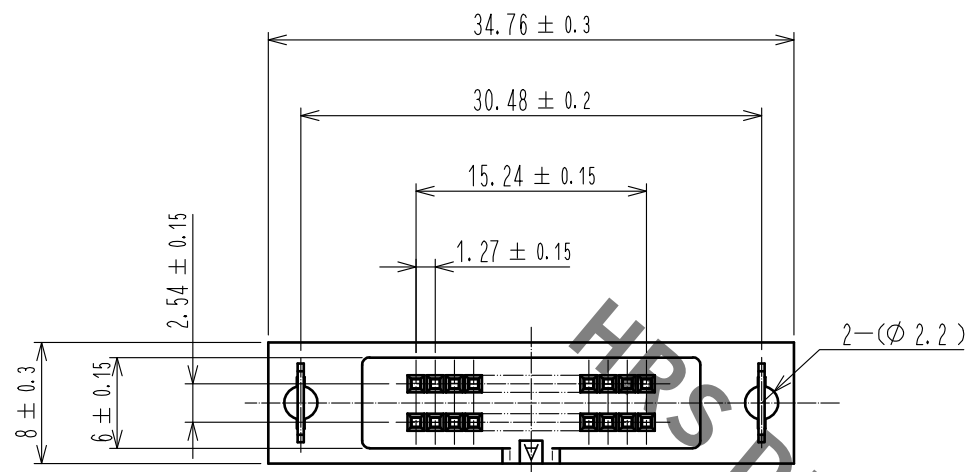



Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

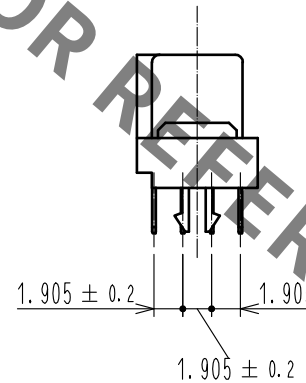

Recommended PC board hole pattern (mounting side)

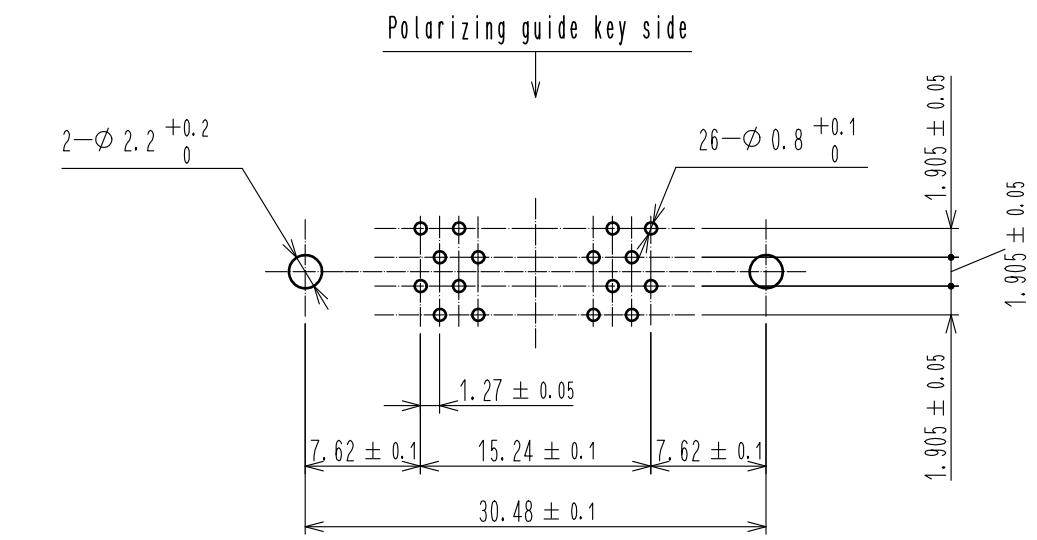

Notes 1 The dimensions in parentheses are for reference.

2	COPPER ALLOY	Contact area : Gold 0.2μm min		4	PHOSPHOR BRONZE	Tin-Plating		
		Dip area : TIN-Plating 2μm min		3	COPPER ALLOY	Contact area : Gold 0.2μm min		
		Under plating : Nickel 2.5μm min				Dip area : TIN-Plating 2μm min		
1	PBT	BLACK UL94V-0				Under plating : Nickel 2.5μm min		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm			SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HT. YAMAGUCHI		18.06.25	DRAWING NO. EDC-019318-71-21			
		CHECKED : HT. YAMAGUCHI		18.06.25	PART NO. HIF6B-26DA-1. 27DSAL(71)			
		DESIGNED : TY. EDAGAWA		18.06.25	CODE NO. CL631-0452-0-71			
		DRAWN : MK. OKI		18.06.21	 1/1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HIF6B-26DA-1.27DSAL\(71\)](#)