
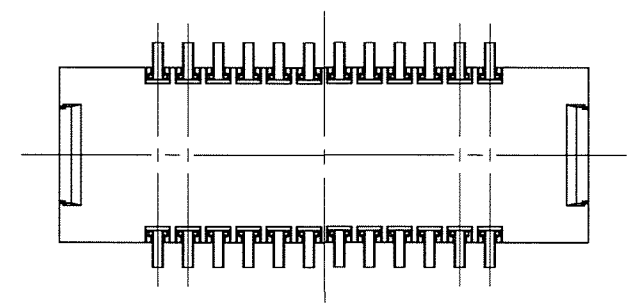
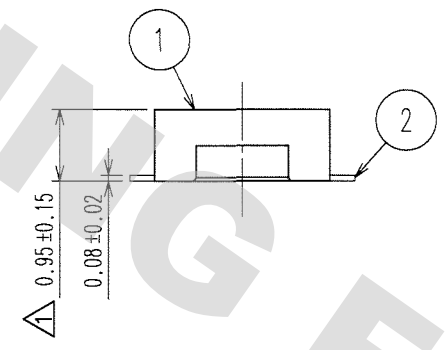
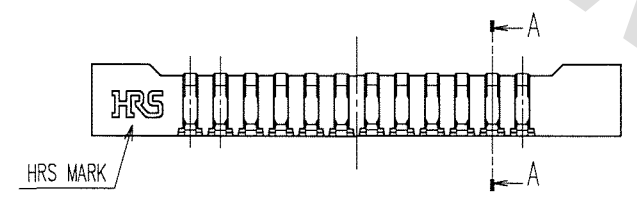


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO


1 2 3 4 5 6 7 8

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
4	DIS-H-002764	R.S	K.M	08.01.29					

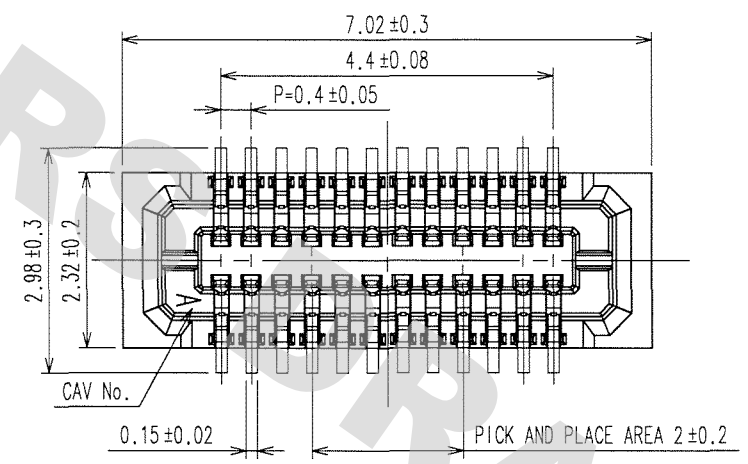


- NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2. PER REEL : 1000 CONNECTORS.
3. AT THE BEGINNING OF THE REEL, 100 mm AT MIN SHALL BE EMPTY POCKETS.
AT THE END OF THE REEL, 160 mm AT MIN SHALL BE EMPTY.
4. CONTACT PLATING SPECIFICATIONS.
CONTACT AREA : GOLD 0.05μ m MIN.
SMT LEAD : GOLD 0.05μ m MIN.
UNDERPLATING : NICKEL 1μ m MIN.
(SURFACE : SEALING)
5. PEEL FORCE OF COVER TAPE REFERS TO JIS C 0806.
6. PROTRUSION OF CONTACT FROM HOUSING UNDERSIDE.

RECOMMENDED METAL MASK
OPENING PATTERN

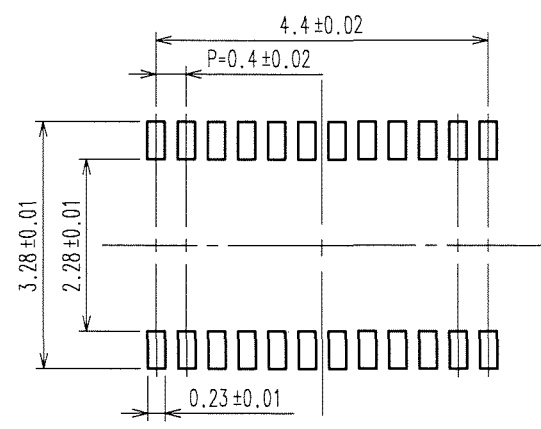


RECOMMENDED SOLDER PASTE: THICKNESS 120μ m

RECOMMENDED PATTERN

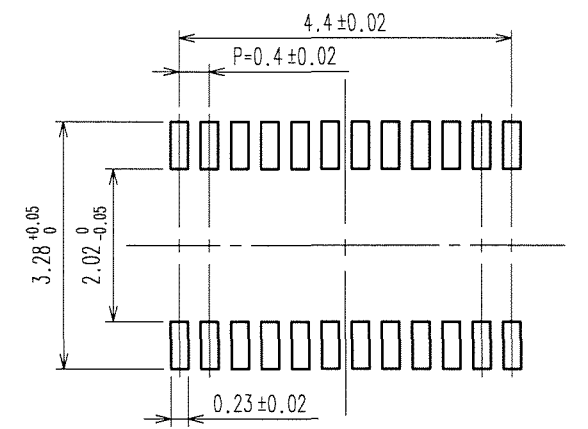


ENGAGEMENT FIGURE

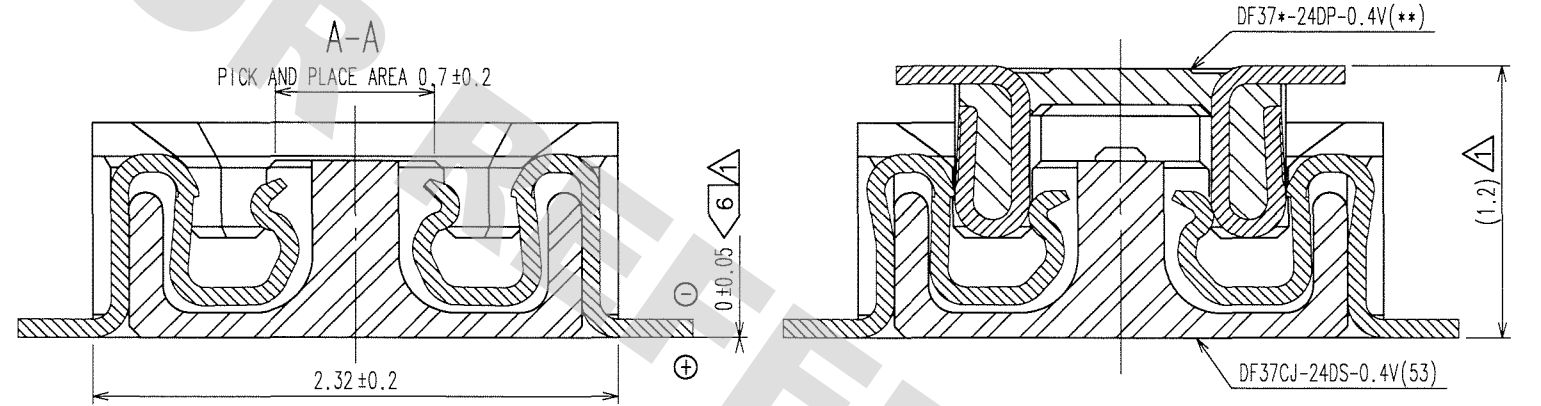

2	PHOSPHOR BRONZE	4	5	PS	PLASTIC REEL (BLACK)
1	LCP	UL94V-0, BLACK	4	POLYESTER	CLEAR (COVER TAPE)
			3	PS	CLEAR (EMBOSSED CARRIER TAPE)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED
		N.Yamashiro	T.Ooi	K.Ikeda	M.Nakamura
		'07.07.21	'07.07.21	'07.07.23	'07.07.23
DRAWING NO.		PART NO.			
EDC3-313142-03		DF37CJ-24DS-0.4V(53)			
SCALE		CODE NO.			
FREE		CL684-3046-0-53			
UNITS					
mm					
HRS		HIROSE ELECTRIC CO., LTD			

FORM NO. 229

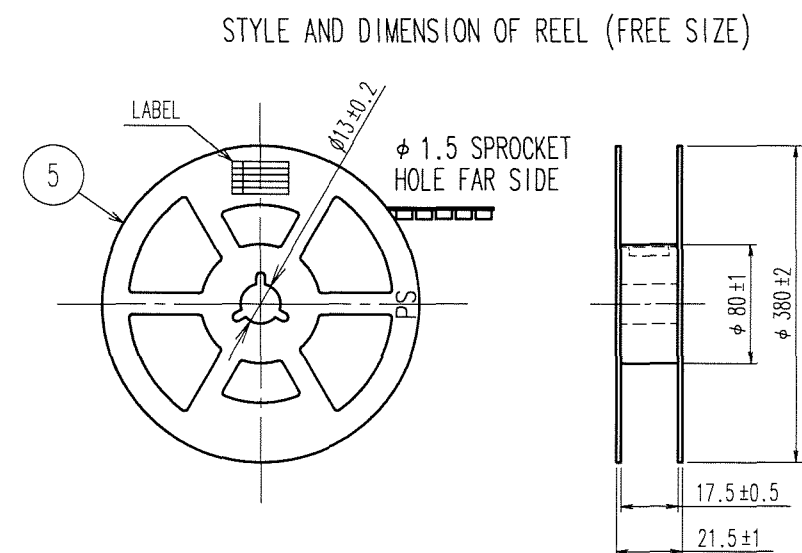

DETAIL OF PART NO. LABEL

SUPPLIER	
QUANTITY	
PART NO.	
CODE NO.	
DATE OF MANUFACTURED	
生産月日	年 月 日
図番	CL684-3046-0-53
品名	DF37CJ-24DS-0.4V(53)
納入数量	1000個
納入者	ヒロセ電機(株)

DIRECTION OF
UNREELING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DF37CJ-24DS-0.4V\(53\)](#)