

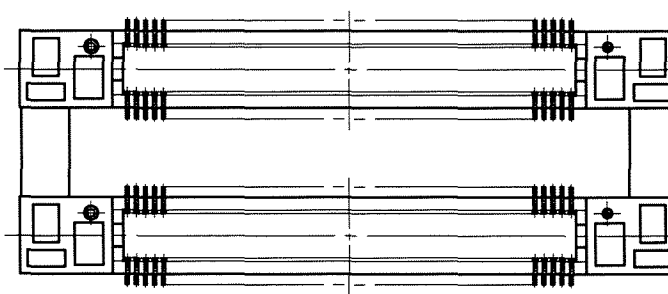

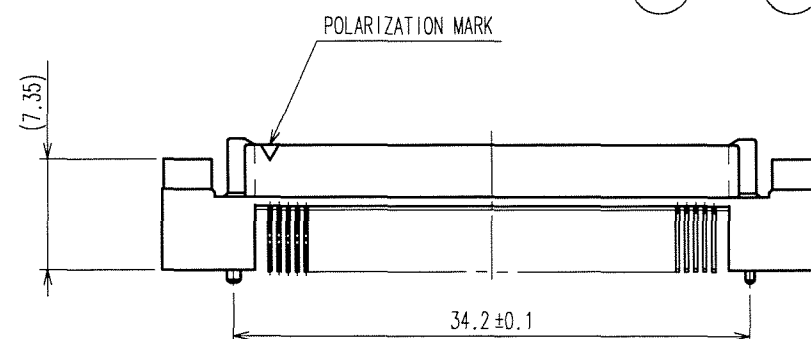



	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
▲	1	DIS-F-001011	K.D	H.D	06.04.27	▲					. .
▲					. .	▲					. .
▲					. .	▲					. .

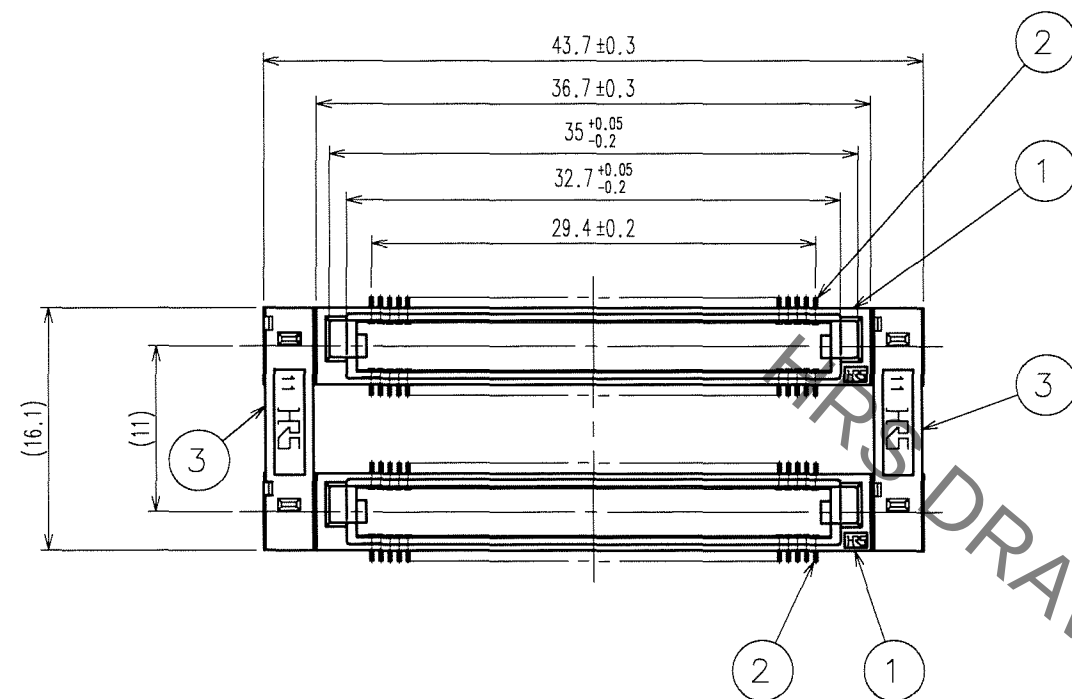

RECOMMENDED LAND PATTERN DIMENSION
OF PCB (MOUNTING SIDE)

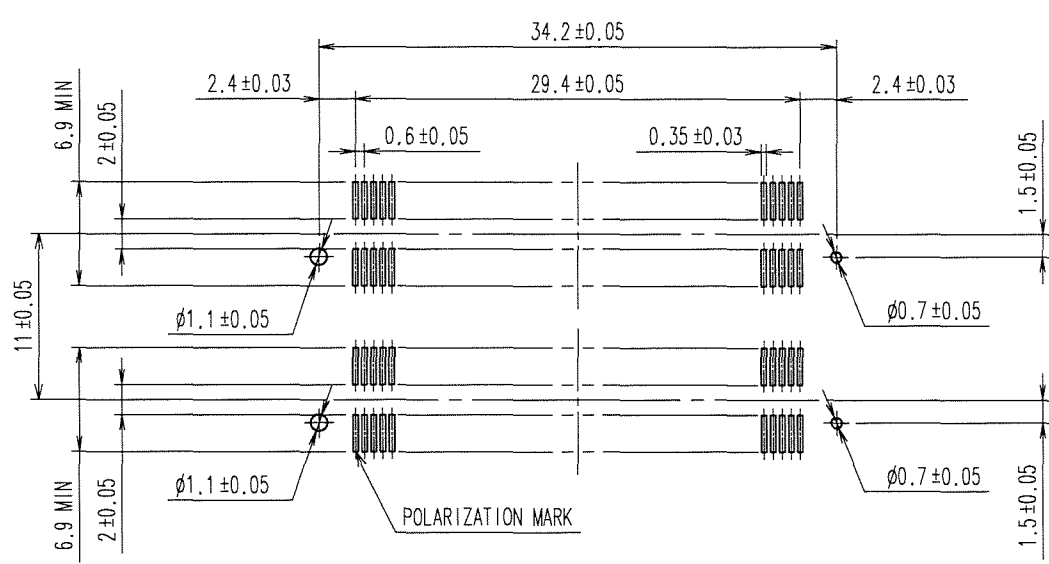

- NOTES 1 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2 AFTER MOUNTING BOARD, REF.NO.3 SHALL BE REMOVED.
3 FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK
4 MARK MAY BE ADDED DEPENDS ON CIRCUMSTANCES.
5 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE

1, 3	POLYPHENYLENE SULFIDE	LIGHT BROWN (UL94V-0)	5	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μ m min		
					LEAD AREA:TIN-PLATING 1μ m min		
					UNDER PLATING:NICKEL 1μ m min		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			K.DOI '04.12.28	K.DOI '04.12.28	H.OKAWA '04.12.28	H.OKAWA '04.12.28	. .
		DRAWING NO.		PART NO.			
SCALE 2 : 1		EDC3-150943-25		FX8C-100/100P11-SV4J (71)			
UNITS mm		 HIROSE ELECTRIC CO., LTD		CODE NO.			1/2
				CL578-0735-0-71			

TO
PCK

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX8C-100/100P11-SV4J\(71\)](#)