


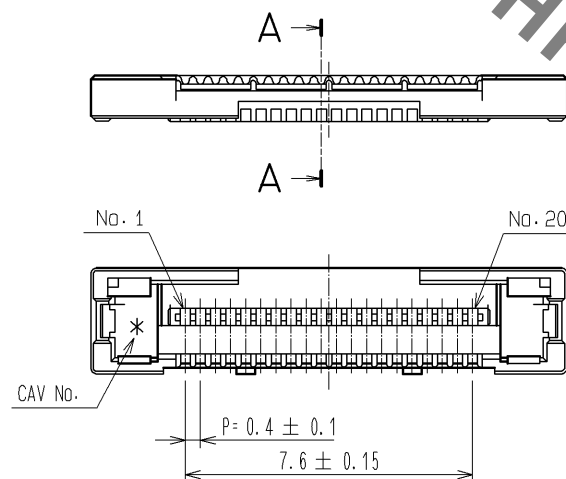
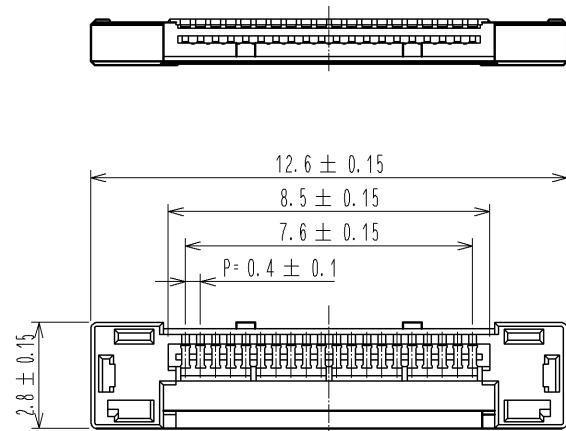
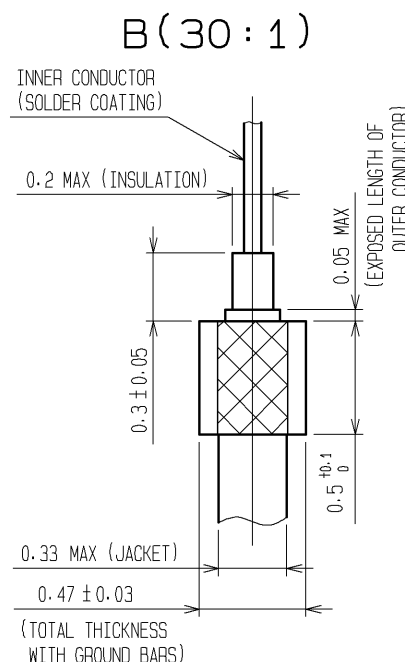


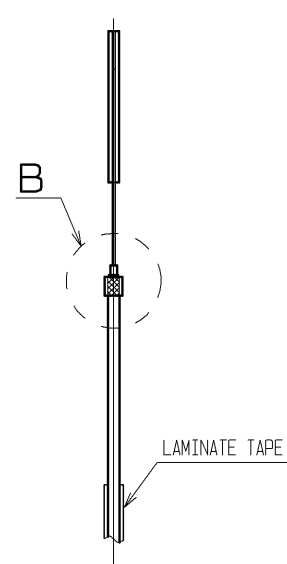


RECOMMENDED CABLE SUBASSEMBLY

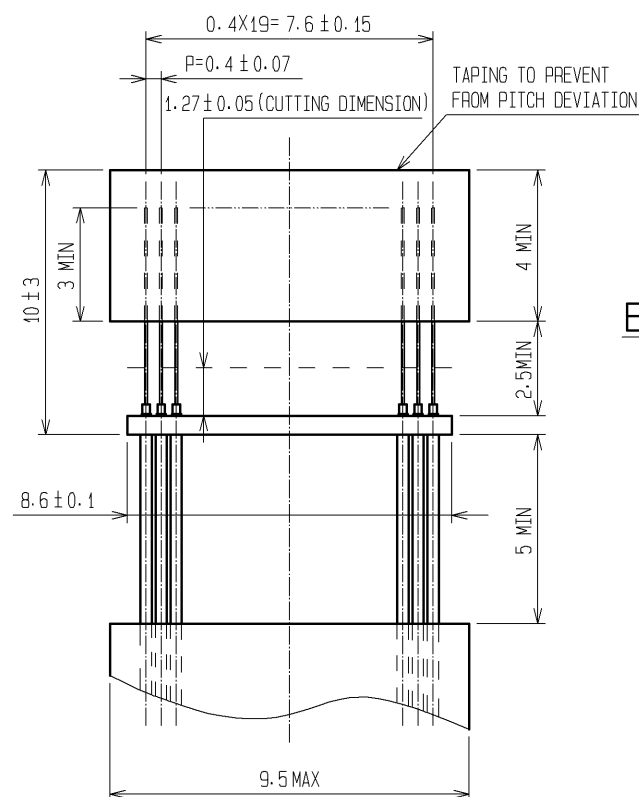

A-A (30 : 1)

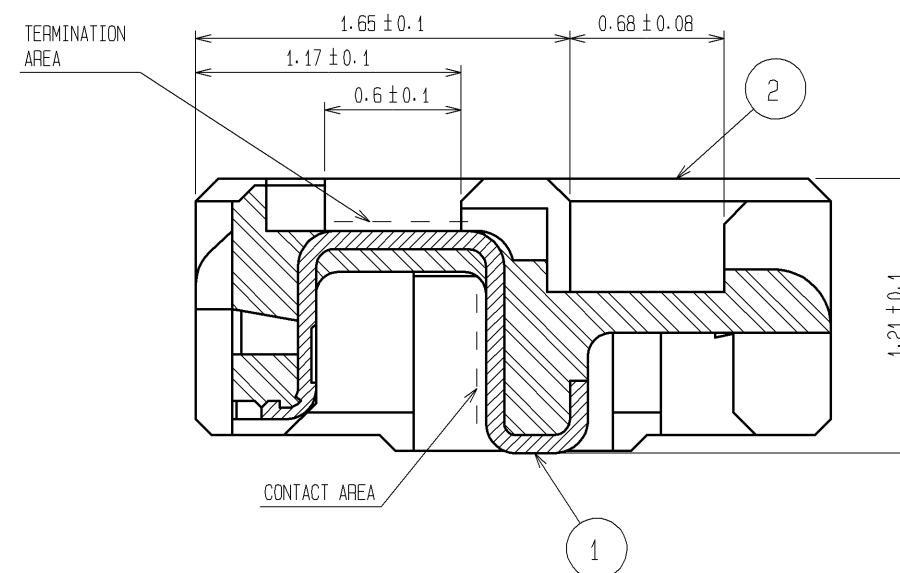

CABLE TERMINATION FIGURE (30 : 1)

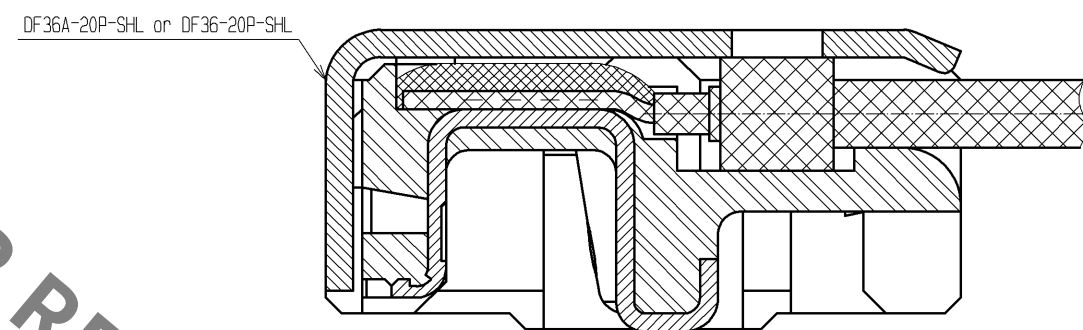


- NOTES 1. APPLICABLE CABLE: THIN COAXIAL CABLE (AWG#42-AWG#46)
2. THIS CONNECTOR IS NOT HOT PLUGGABLE. MATE AND UNMATE WHILE THE POWER IS OFF.
3. THE ASSEMBLY IS COMPLETED BY COMBINING TWO PARTS "CONNECTOR UNIT AND METAL SHIELDING".
REFER TO THE TABLE FOR EACH ITEM No., PART NAME, PART No. AND CODE No.
APPLICABLE SHELL IS DIFFERENT DEPENDING ON THE PART No. OF MATED CONNECTOR.
USE DF36A-20P-SHL FOR DF36A-20S-0.4V(**), USE DF36-20P-SHL FOR DF36-20S-0.4V(**).

ITEM No.	PART NAME	PART No.	CODE No.
1, 2	CONNECTOR UNIT	DF36-20P-0.4SD(51)	CL662-4040-2-51
-	METAL SHIELDING	DF36A-20P-SHL	CL662-4042-8-00
-	METAL SHIELDING	DF36-20P-SHL	CL662-4041-5-00

1	PHOSPHOR BRONZE	CONTACT AREA : Au PLATING 0.1μm min TERMINATION AREA : Au PLATING 0.1μm min UNDER PLATING : Ni PLATING 1μm min	5	PS	BLACK
NO.	MATERIAL	FINISH . REMARKS	4	POLYESTER	CLEAR
UNITS mm		SCALE 5 : 1	3	PS	CLEAR
	COUNT	DESCRIPTION OF REVISIONS	2	LCP	UL94V-0
	DRAWING NO.	DESIGNED	NO.	MATERIAL	FINISH . REMARKS
	PART NO.	CHECKED : TS. SAKATA 09. 04. 17	1	PS	BLACK
	CODE NO.	DESIGNED : TS. FUKUSHIMA 09. 04. 17	2	POLYESTER	CLEAR
		DESIGNED : HY. SHIOZAWA 09. 04. 17	3	PS	CLEAR
		DRAWN : HY. SHIOZAWA 09. 04. 17	4	LCP	UL94V-0
			5	PS	BLACK
			6	POLYESTER	CLEAR
			7	PS	CLEAR
			8	LCP	UL94V-0

Oct.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

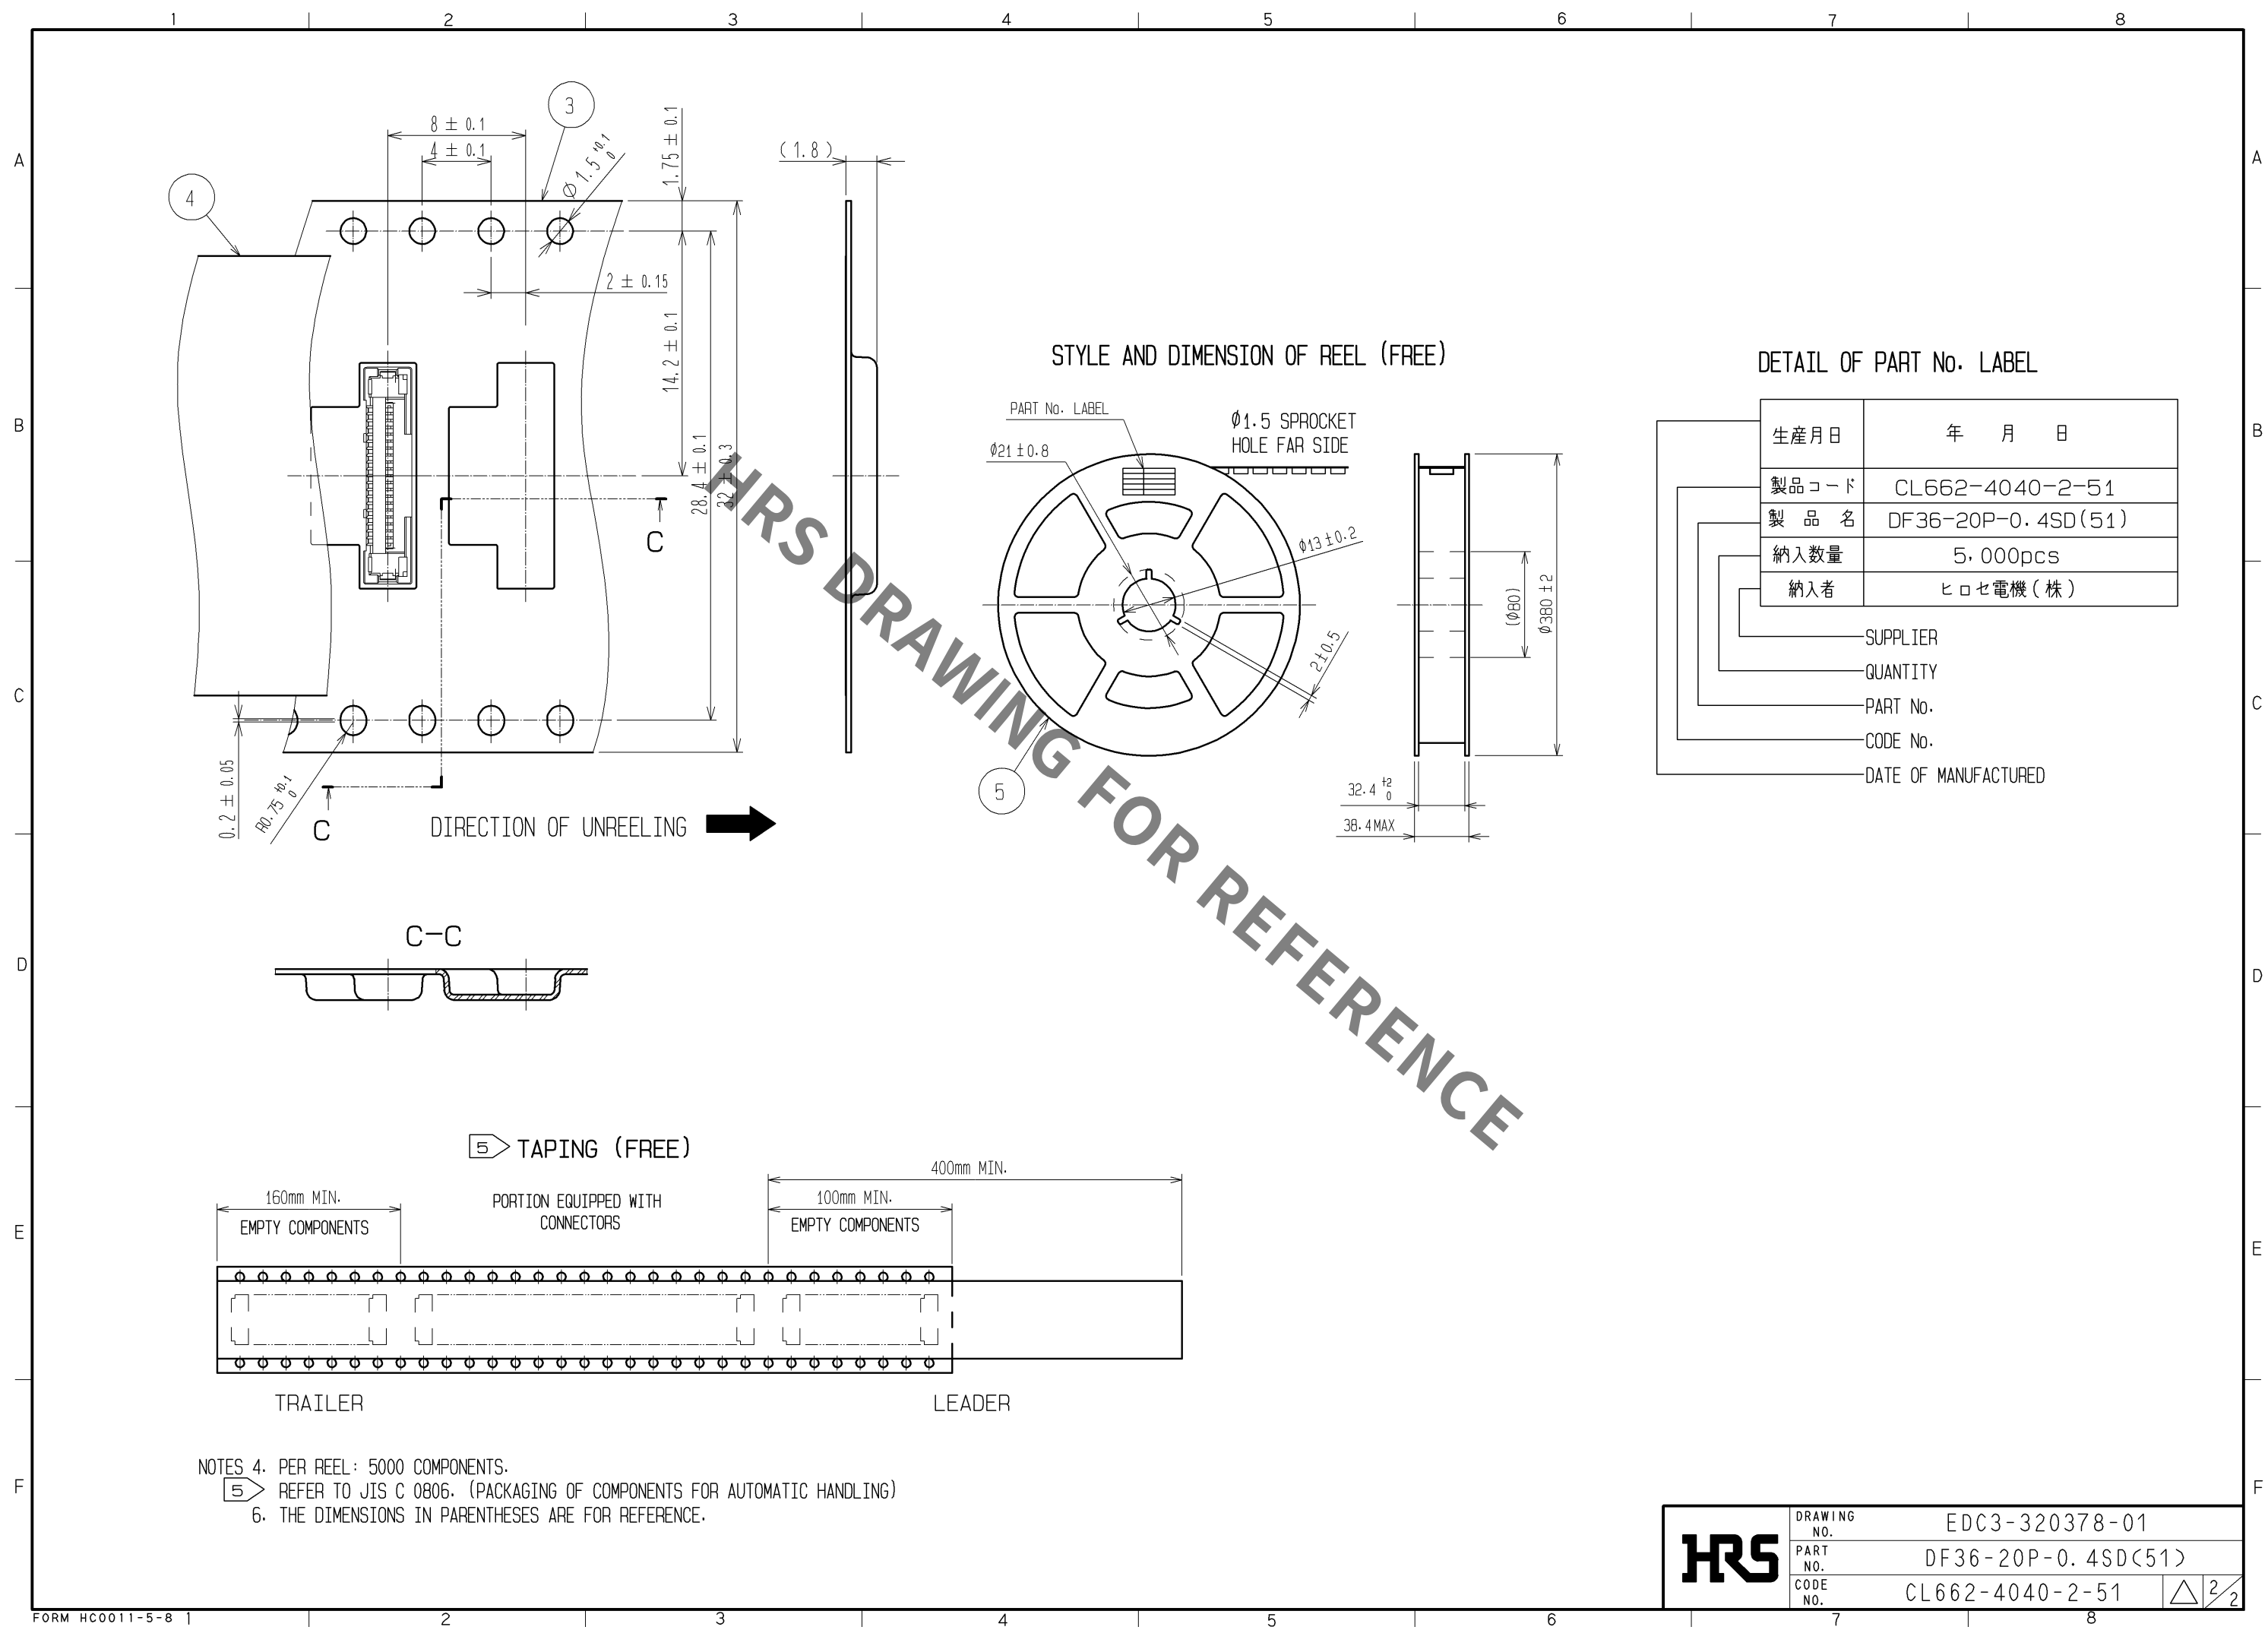

HRS	DRAWING NO.	EDC3-320378-01
	PART NO.	DF36-20P-0.4SD(51)
	CODE NO.	CL662-4040-2-51

2/2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DF36-20P-0.4SD\(51\)](#)