

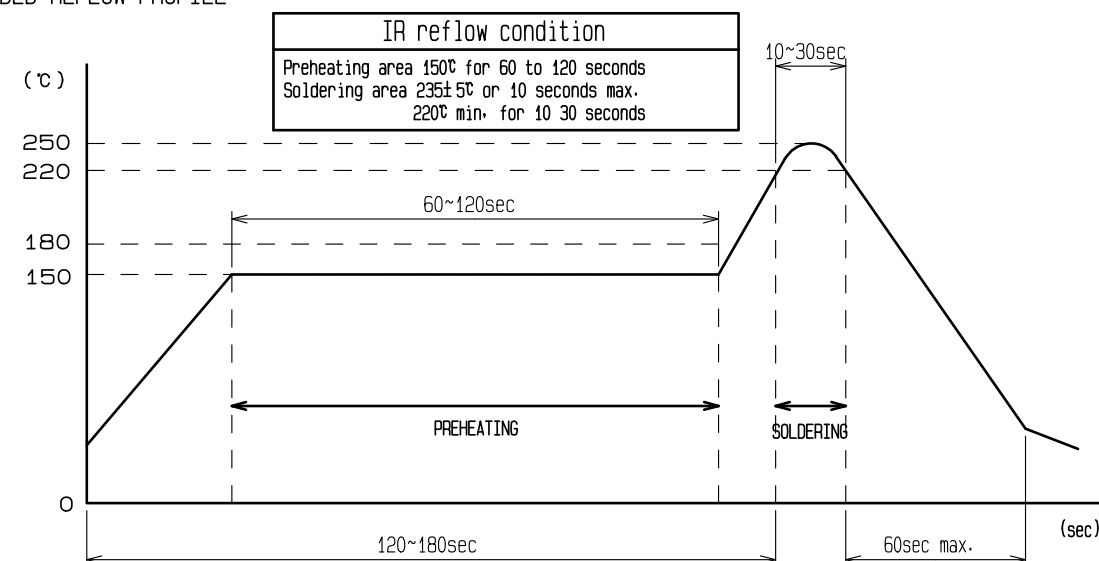
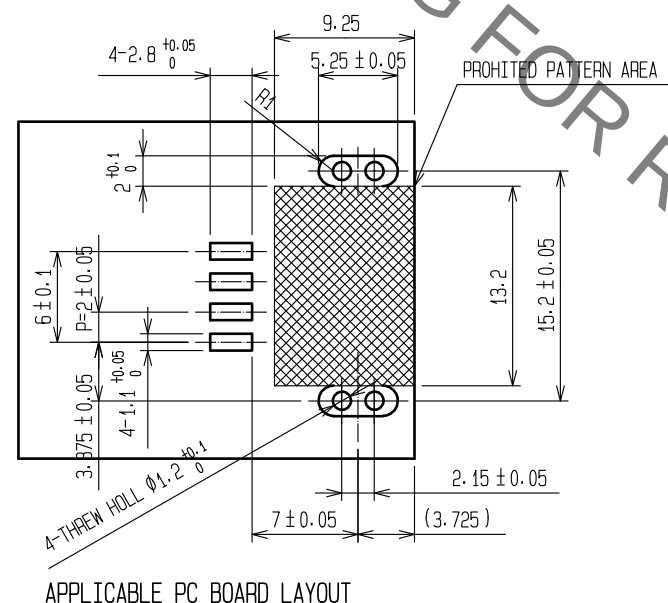

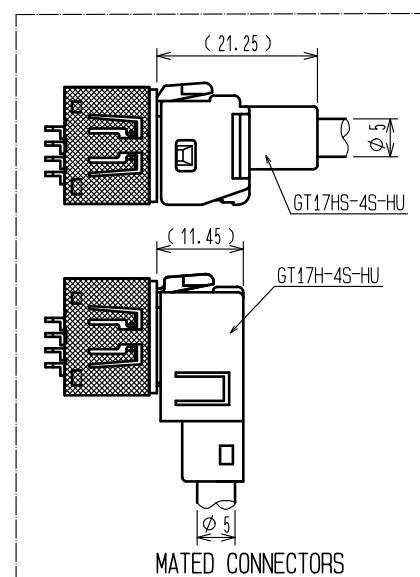
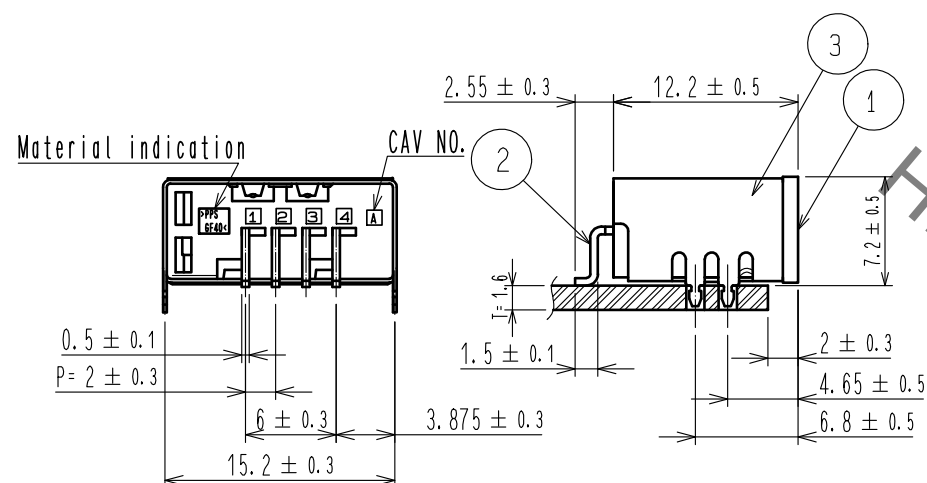





Note1. The soldering process is allowed up to twice under the same condition. However, the interval between the first and second process must be maintained at the room temperature.

Note2. The temperature indicates the board surface temperature on the connector lead area.

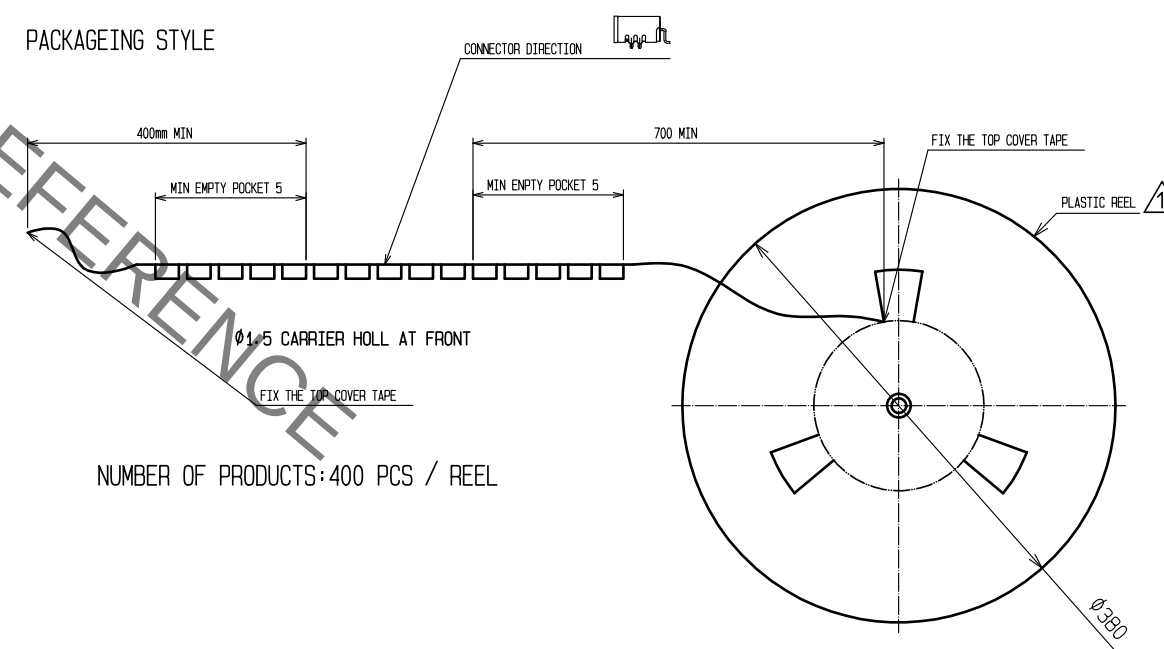

			
CL767-0083-3 GT17H-4P-2H COLOR : LIGHT GRAY	CL767-0170-6 GT17H-4P-2H(A) COLOR : BROWN	CL767-0171-9 GT17H-4P-2H(B) COLOR : GREEN	CL767-0172-1 GT17H-4P-2H(C) COLOR : BLUE
MATING INSULATOR : CL767-0084-6 GT17H-4S-2C COLOR : LIGHT GRAY	MATING INSULATOR : CL767-0167-1 GT17H-4S-2C(A) COLOR : BROWN	MATING INSULATOR : CL767-0168-4 GT17H-4S-2C(B) COLOR : GREEN	MATING INSULATOR : CL767-0169-7 GT17H-4S-2C(C) COLOR : BLUE

2	BRASS	Ni 1μm + Sn PLATING 2μm								
1	PPS	BROWN		3	COPPER ALLOY	Sn PLATING 1μm				
NO.	MATERIAL	FINISH , REMARKS				NO.	MATERIAL	FINISH , REMARKS		
UNITS mm 	HRSHIROSE ELECTRIC CO., LTD.	SCALE 2 : 1	 1	COUNT DIS-T-00006678		DESCRIPTION OF REVISIONS TS. KUBOTA		DESIGNED EJ. WAKATSUKI		DATE 20200901
		APPROVED : KI. HIROKAWA		20200326	DRAWING NO.		EDC-166942-55-00			
		CHECKED : EJ. WAKATSUKI		20200325	PART NO.		GT17H-4P-2H(A)(55)			
		DESIGNED : TS. KUBOTA		20200325	CODE NO.		CL767-0170-6-55			
		DRAWN : YK. MITSUISHI		20200219	NO.		1/1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[GT17H-4P-2H\(A\)\(55\)](#)