


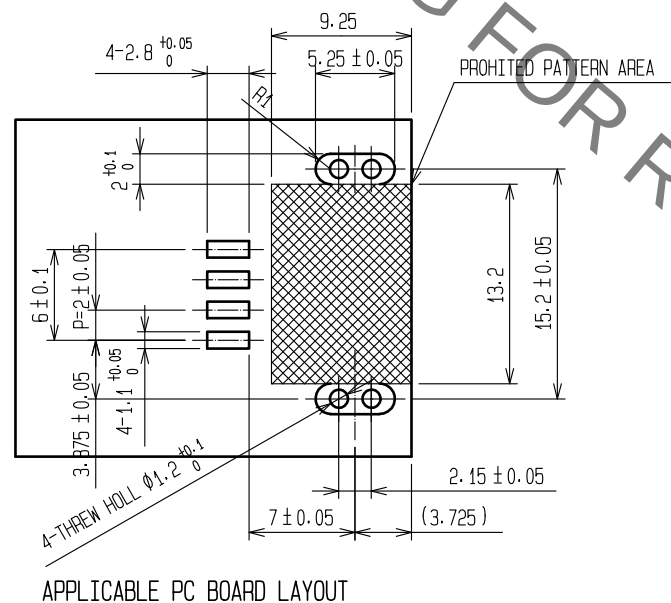

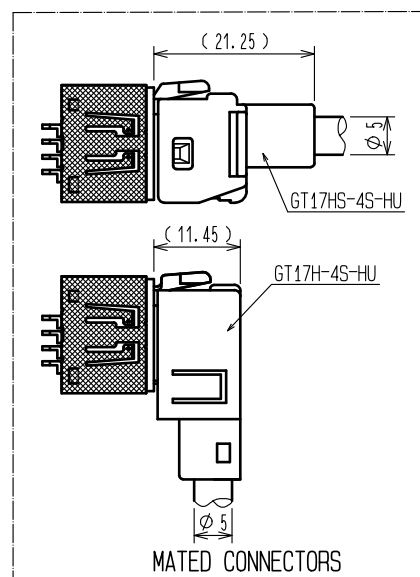


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


RoHS, ELV COMPLIANT

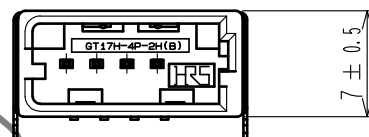

Material indication

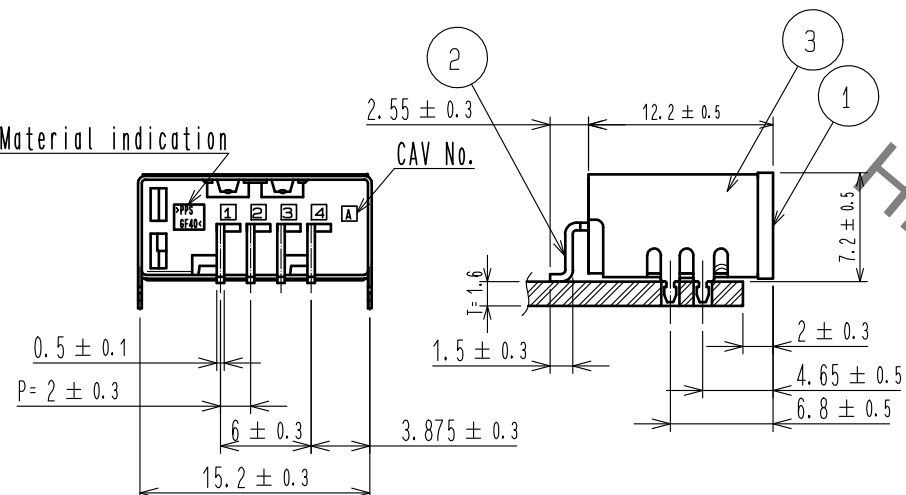


RECOMMENDED REFLOW PROFILE




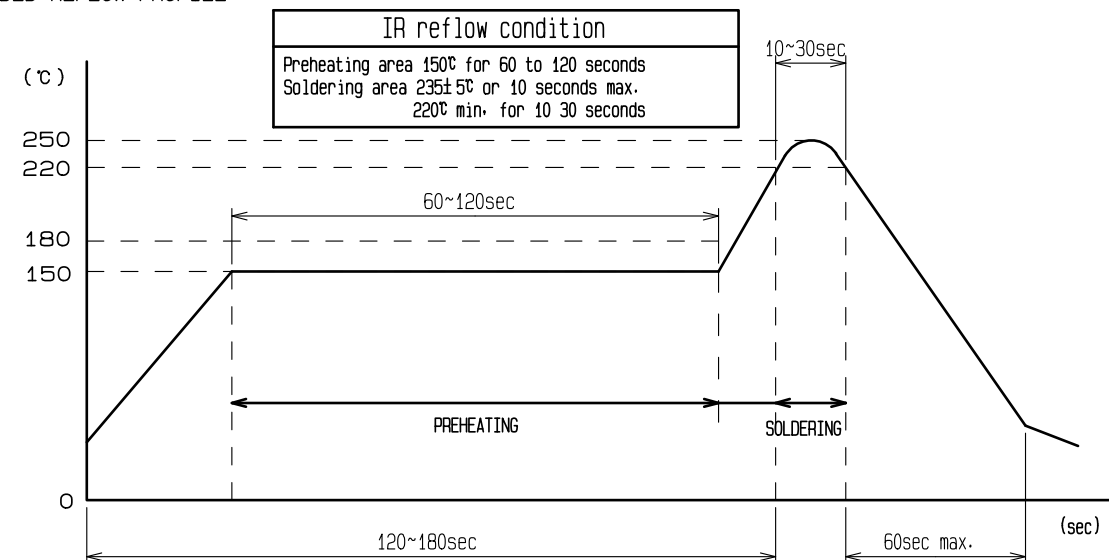



Note1. The soldering process is allowed up to twice under the same condition. However, the interval between the first and second process must be maintained at the room temperature.
Note2. The temperature indicates the board surface temperature on the connector lead area.

PACKAGEING STYLE

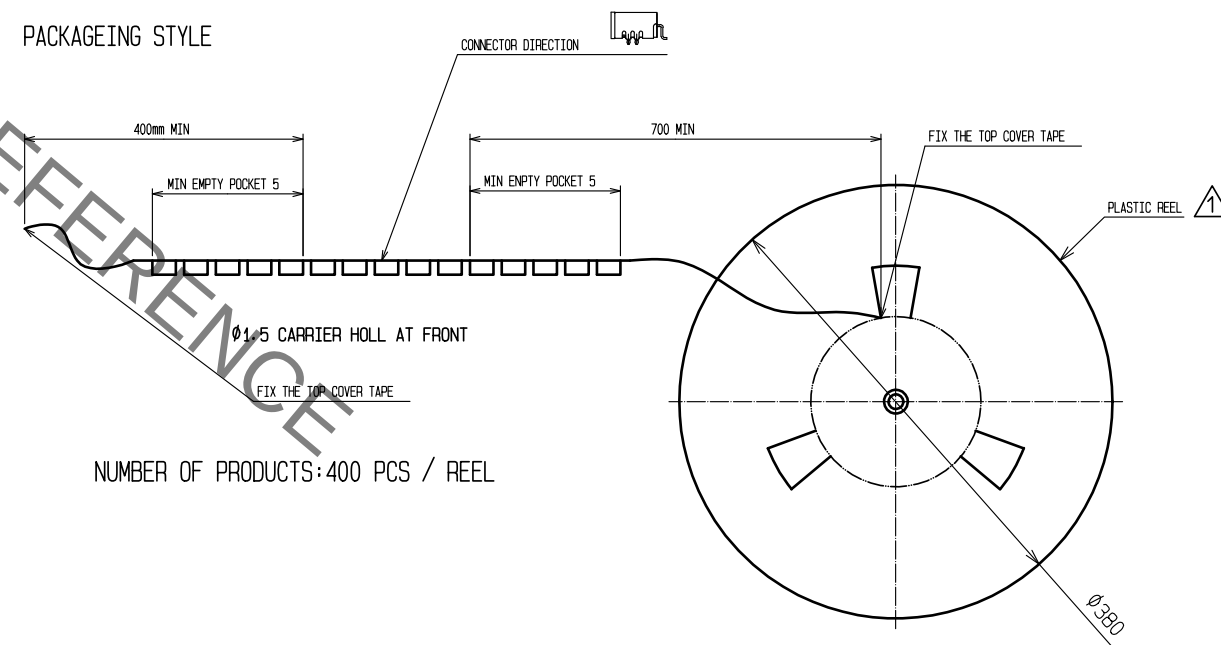

NUMBER OF PRODUCTS: 400 PCS / REEL

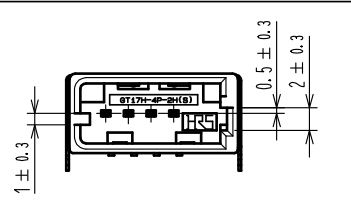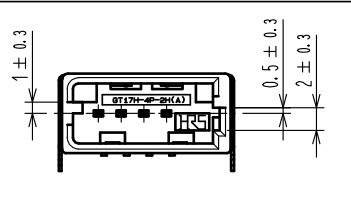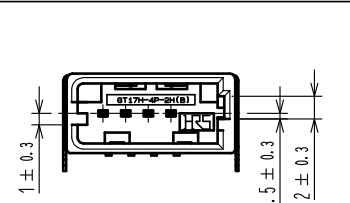			
CL767-0083-3 GT17H-4P-2H COLOR : LIGHT GRAY	CL767-0170-6 GT17H-4P-2H(A) COLOR : BROWN	CL767-0171-9 GT17H-4P-2H(B) COLOR : GREEN	CL767-0172-1 GT17H-4P-2H(C) COLOR : BLUE
MATING INSULATOR : CL767-0084-6 GT17H-4S-2C COLOR : LIGHT GRAY	MATING INSULATOR : CL767-0167-1 GT17H-4S-2C(A) COLOR : BROWN	MATING INSULATOR : CL767-0168-4 GT17H-4S-2C(B) COLOR : GREEN	MATING INSULATOR : CL767-0169-7 GT17H-4S-2C(C) COLOR : BLUE

2	BRASS	Ni 1µm + Sn PLATING 2µm	4		
1	PPS	GREEN	3	COPPER ALLOY	Sn PLATING 1µm
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-T-00006678	DESIGNED TS. KUBOTA
				CHECKED EJ. WAKATSUKI	DATE 20200909
APPROVED : KI. HIROKAWA 20200326				DRAWING NO. EDC-166943-55-00	
CHECKED : EJ. WAKATSUKI 20200325				PART NO. GT17H-4P-2H(B)(55)	
DESIGNED : TS. KUBOTA 20200325				CODE NO. CL767-0171-9-55	
DRAWN : YK. MITSUISHI 20200219					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[GT17H-4P-2H\(B\)\(55\)](#)