

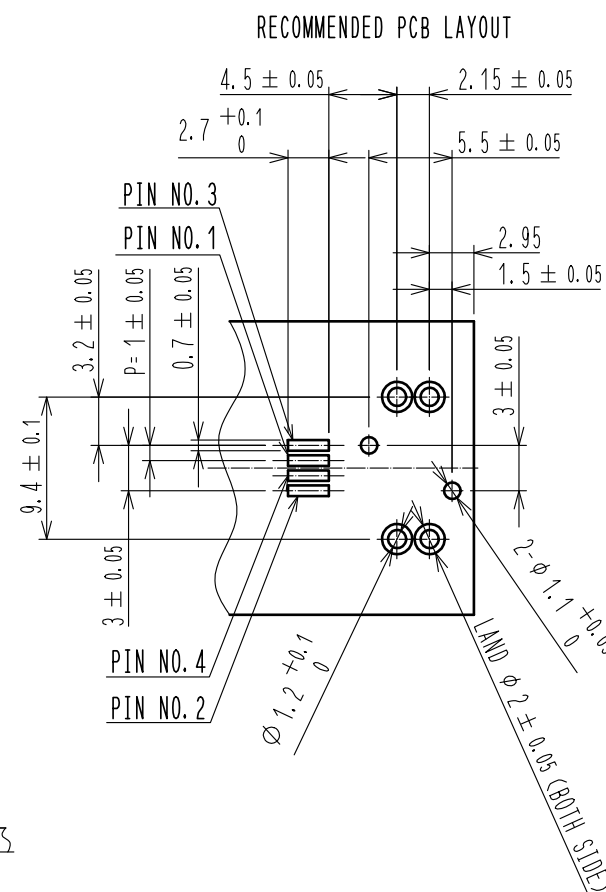
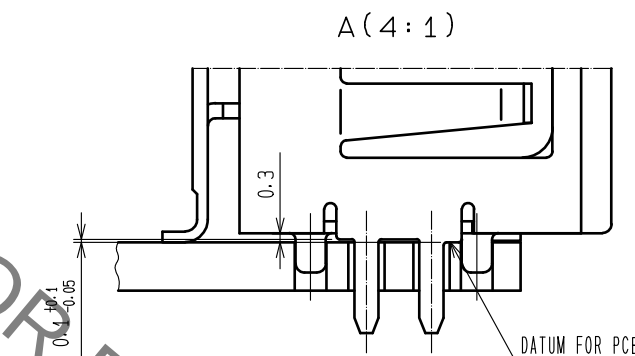
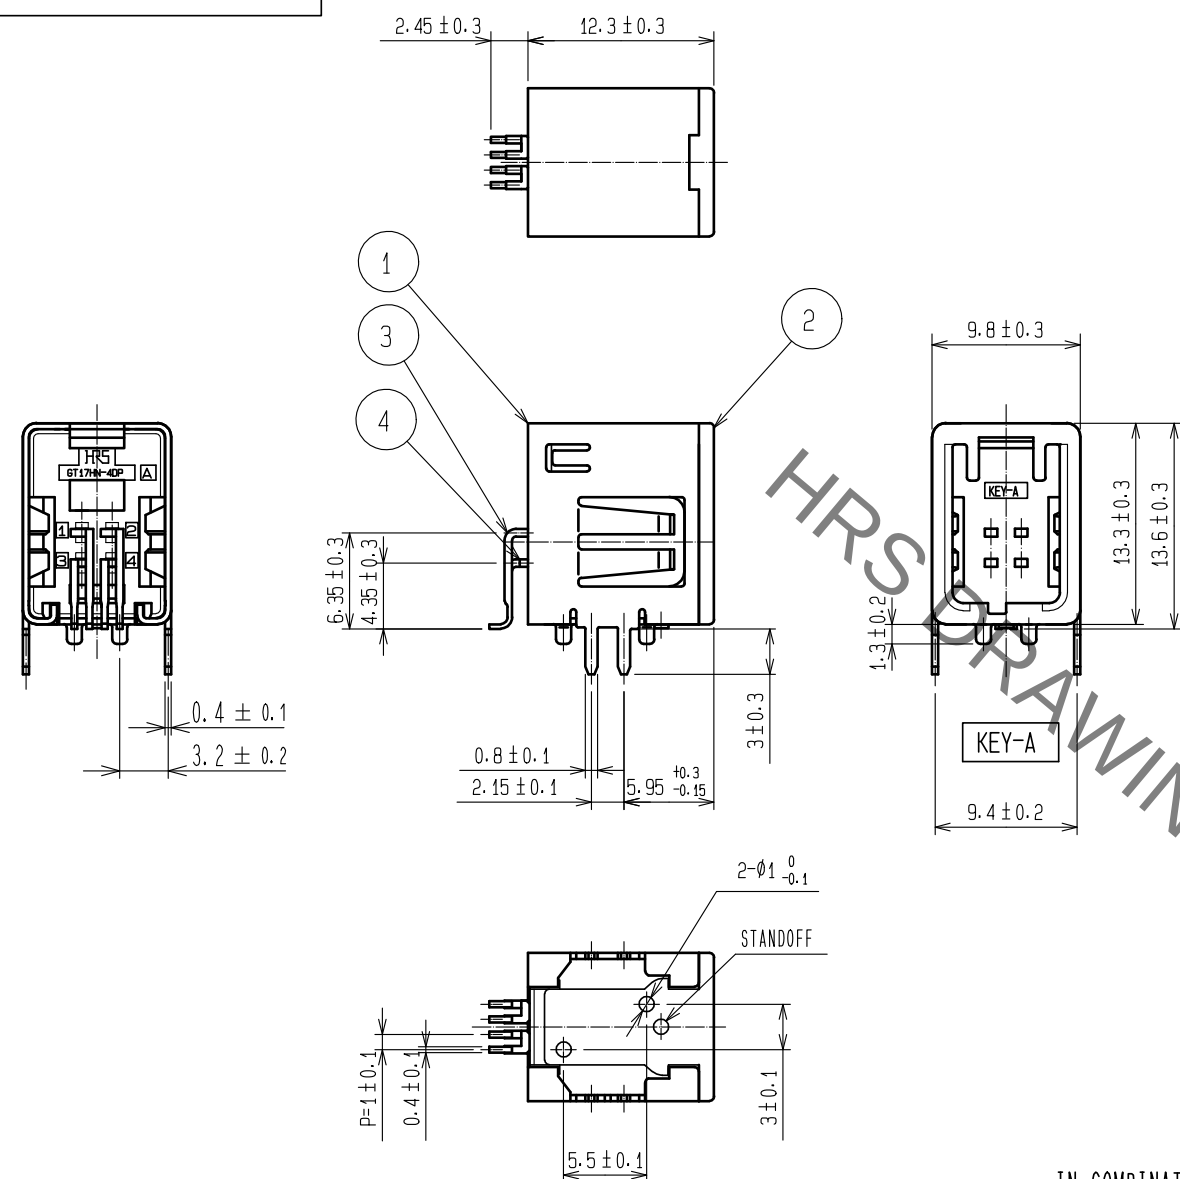
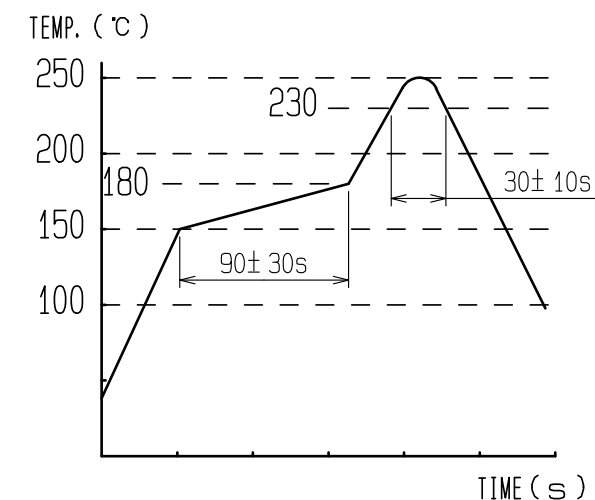


- 4) HAND SOLDERING: 280-300°C, 2S MAX.
- 5) RECOMMENDED THICKNESS OF PCB: 1.6mm
- 6) FOR THE PREVENTION EXCESSIVE STRESS FOR CONNECTOR AND PCB, WE RECOMMEND ADDITIONAL SUPPORT MECHANISM IF THE FLANGE WAS ELIMINATED.

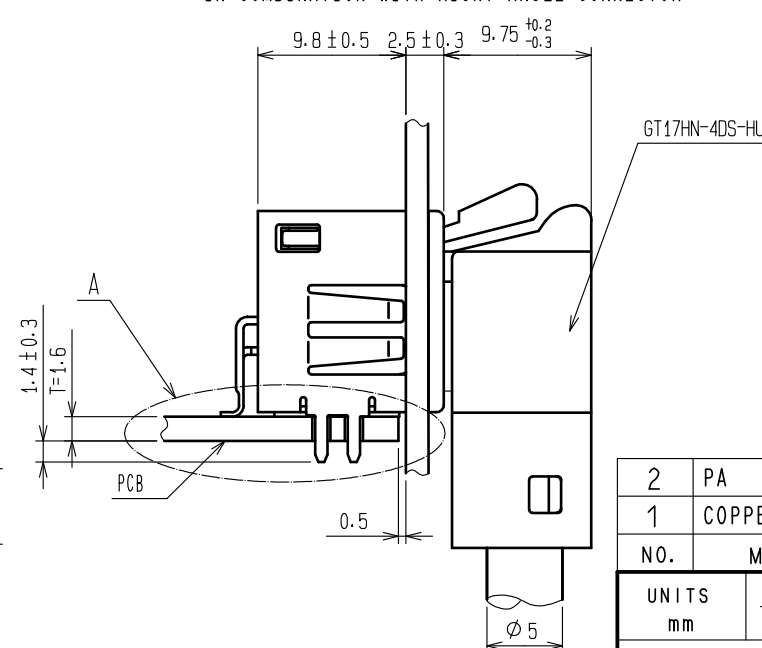


RECOMMENDED PANNEL LAYOUT

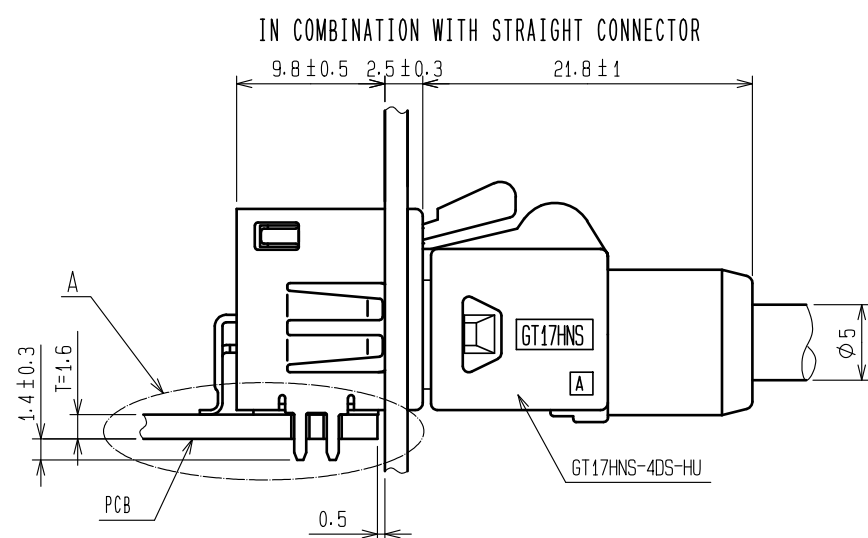

2	PA	BROWN		4	BRASS	TIN PLATING			
1	COPPER ALLOY	TIN PLATING		3	BRASS	TIN PLATING			
NO.	MATERIAL	FINISH .		REMARKS	NO.	MATERIAL	FINISH .	REMARKS	
UNITS mm		SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-T-00006678		DESIGNED TS. KUBOTA	CHECKED EJ. WAKATSUKI	DATE 20200909
 HIROSE ELECTRIC CO., LTD.	APPROVED		· KI. HIROKAWA		20200409		DRAWING NO. EDC-168892-66-00		
	CHECKED		· EJ. WAKATSUKI		20200408		PART NO. GT17HN2-4DP-2H(A)(66)		
	DESIGNED		· TS. KUBOTA		20200325		CODE NO. CL767-0267-6-66		
	DRAWN		· YK. MITSUISHI		20200319		 		

Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

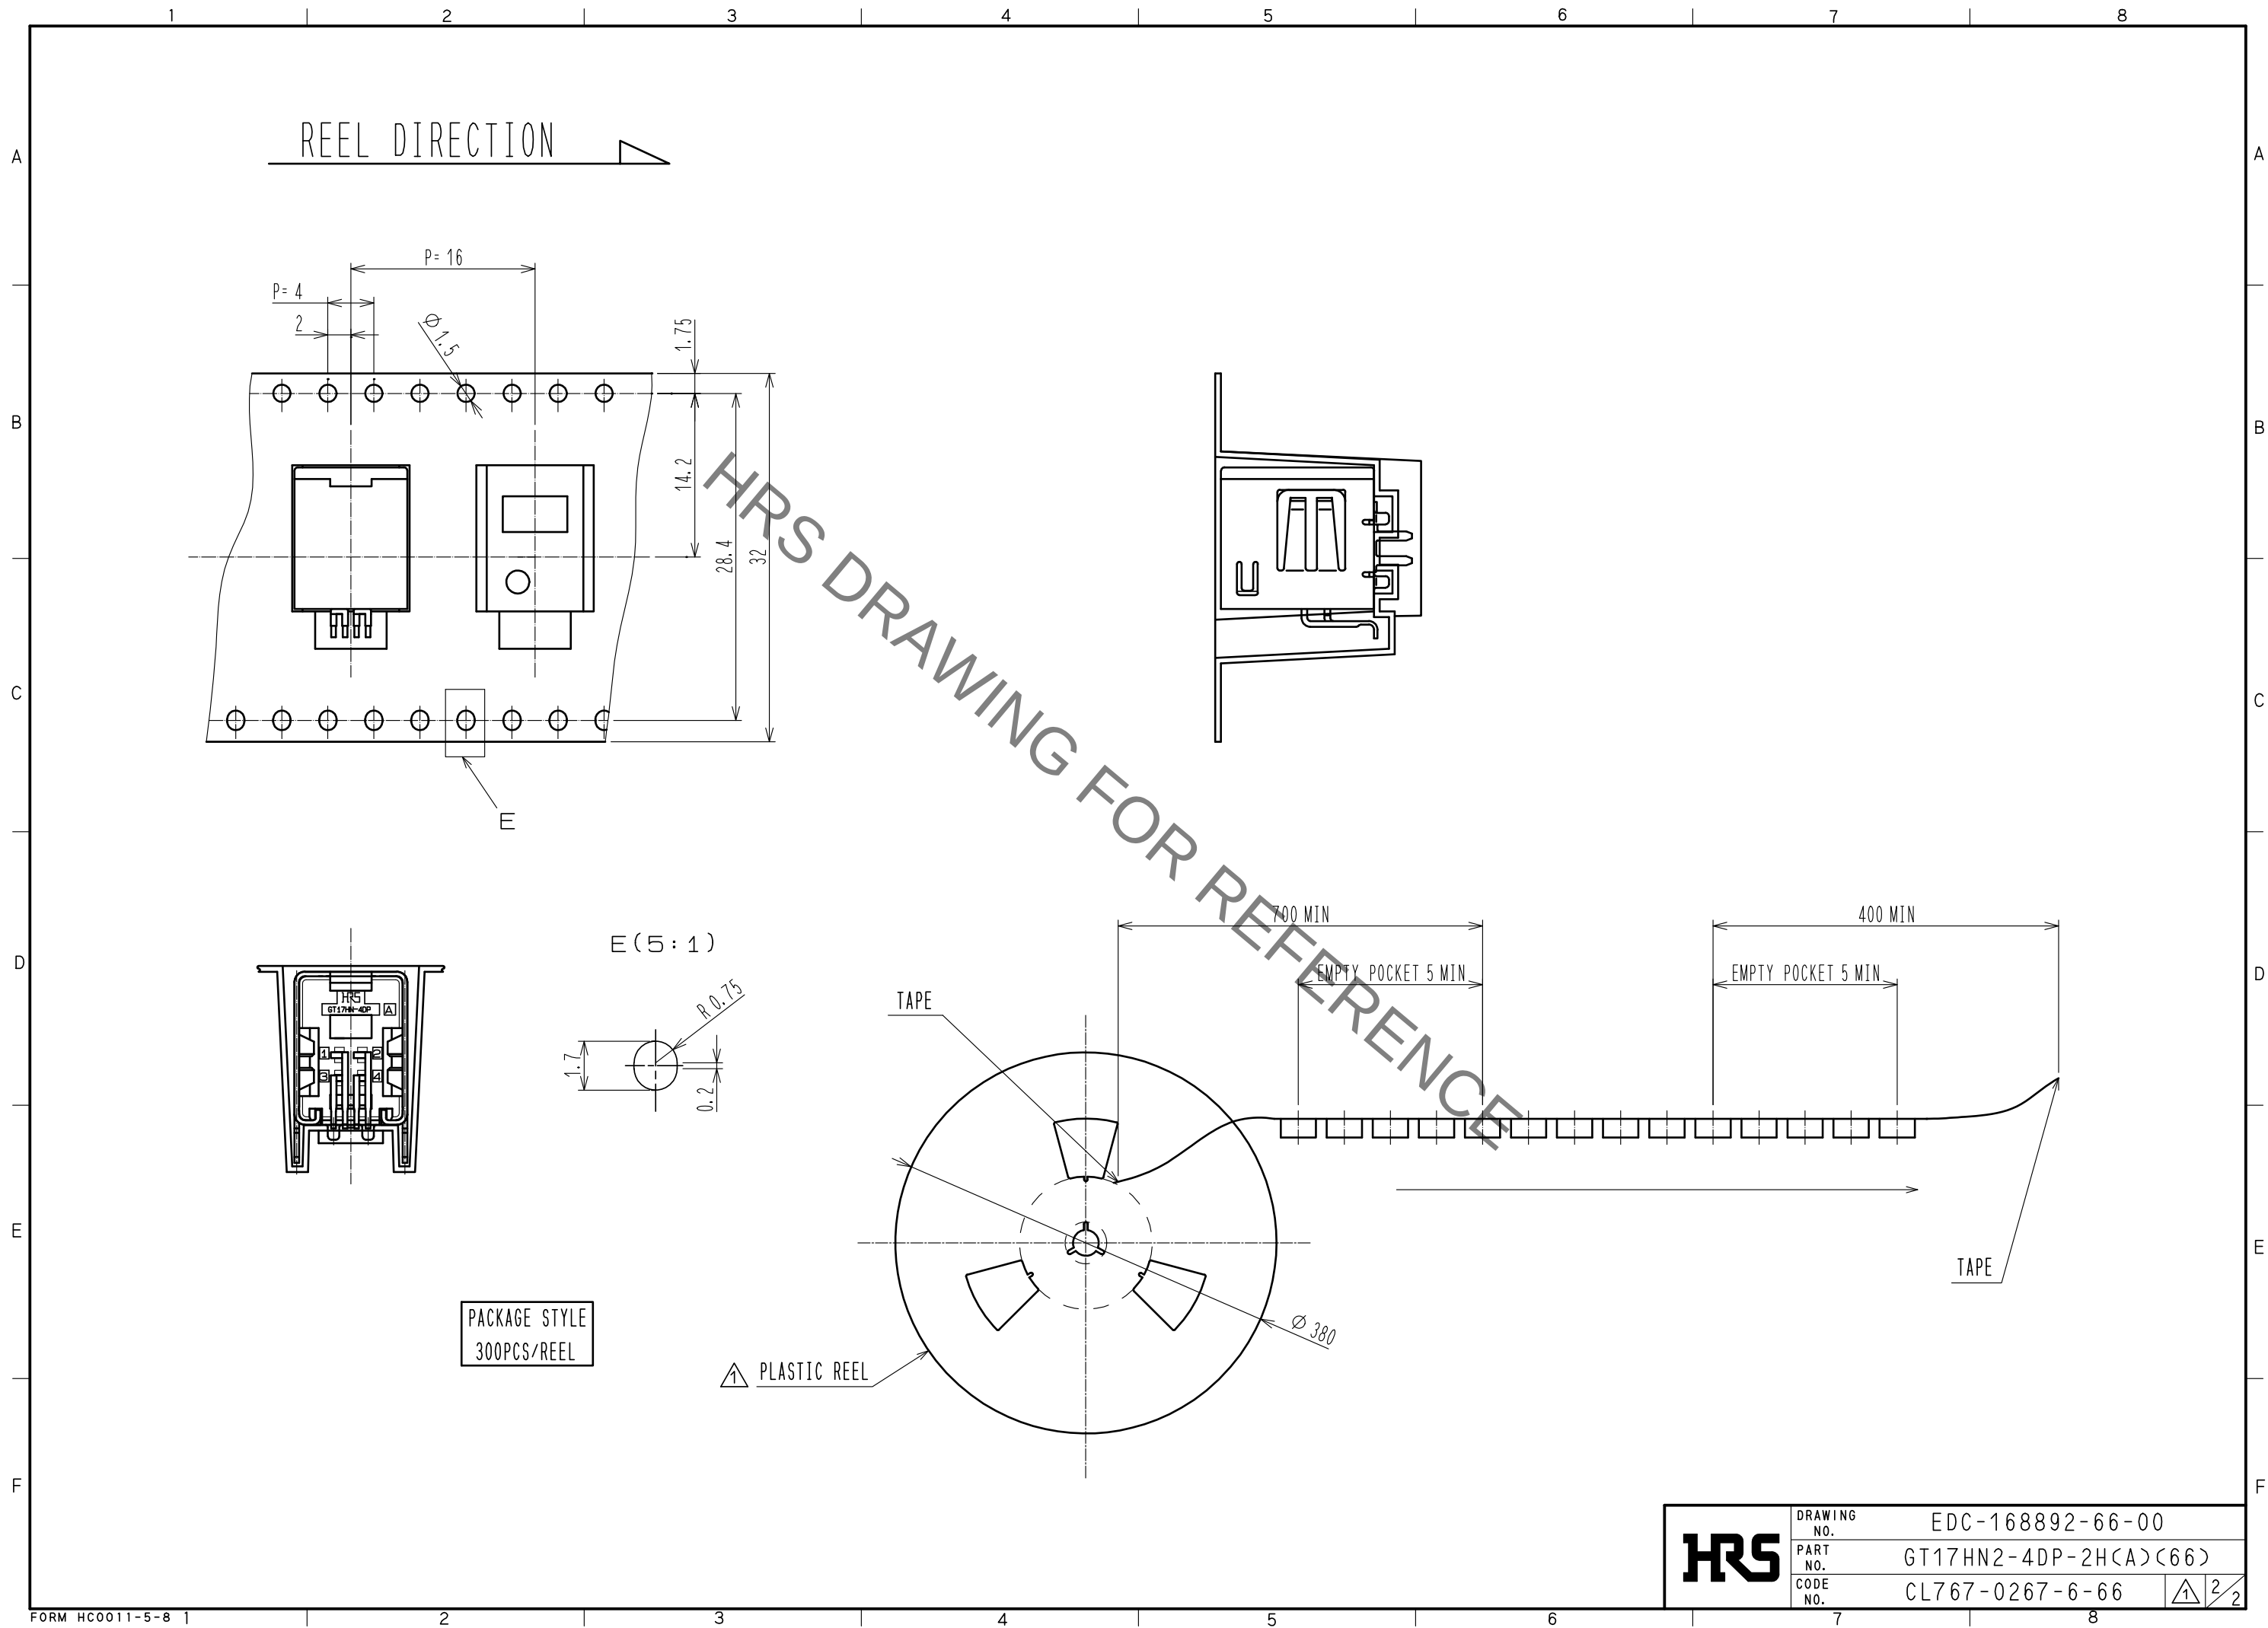

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[GT17HN2-4DP-2H\(A\)\(66\)](#)