


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

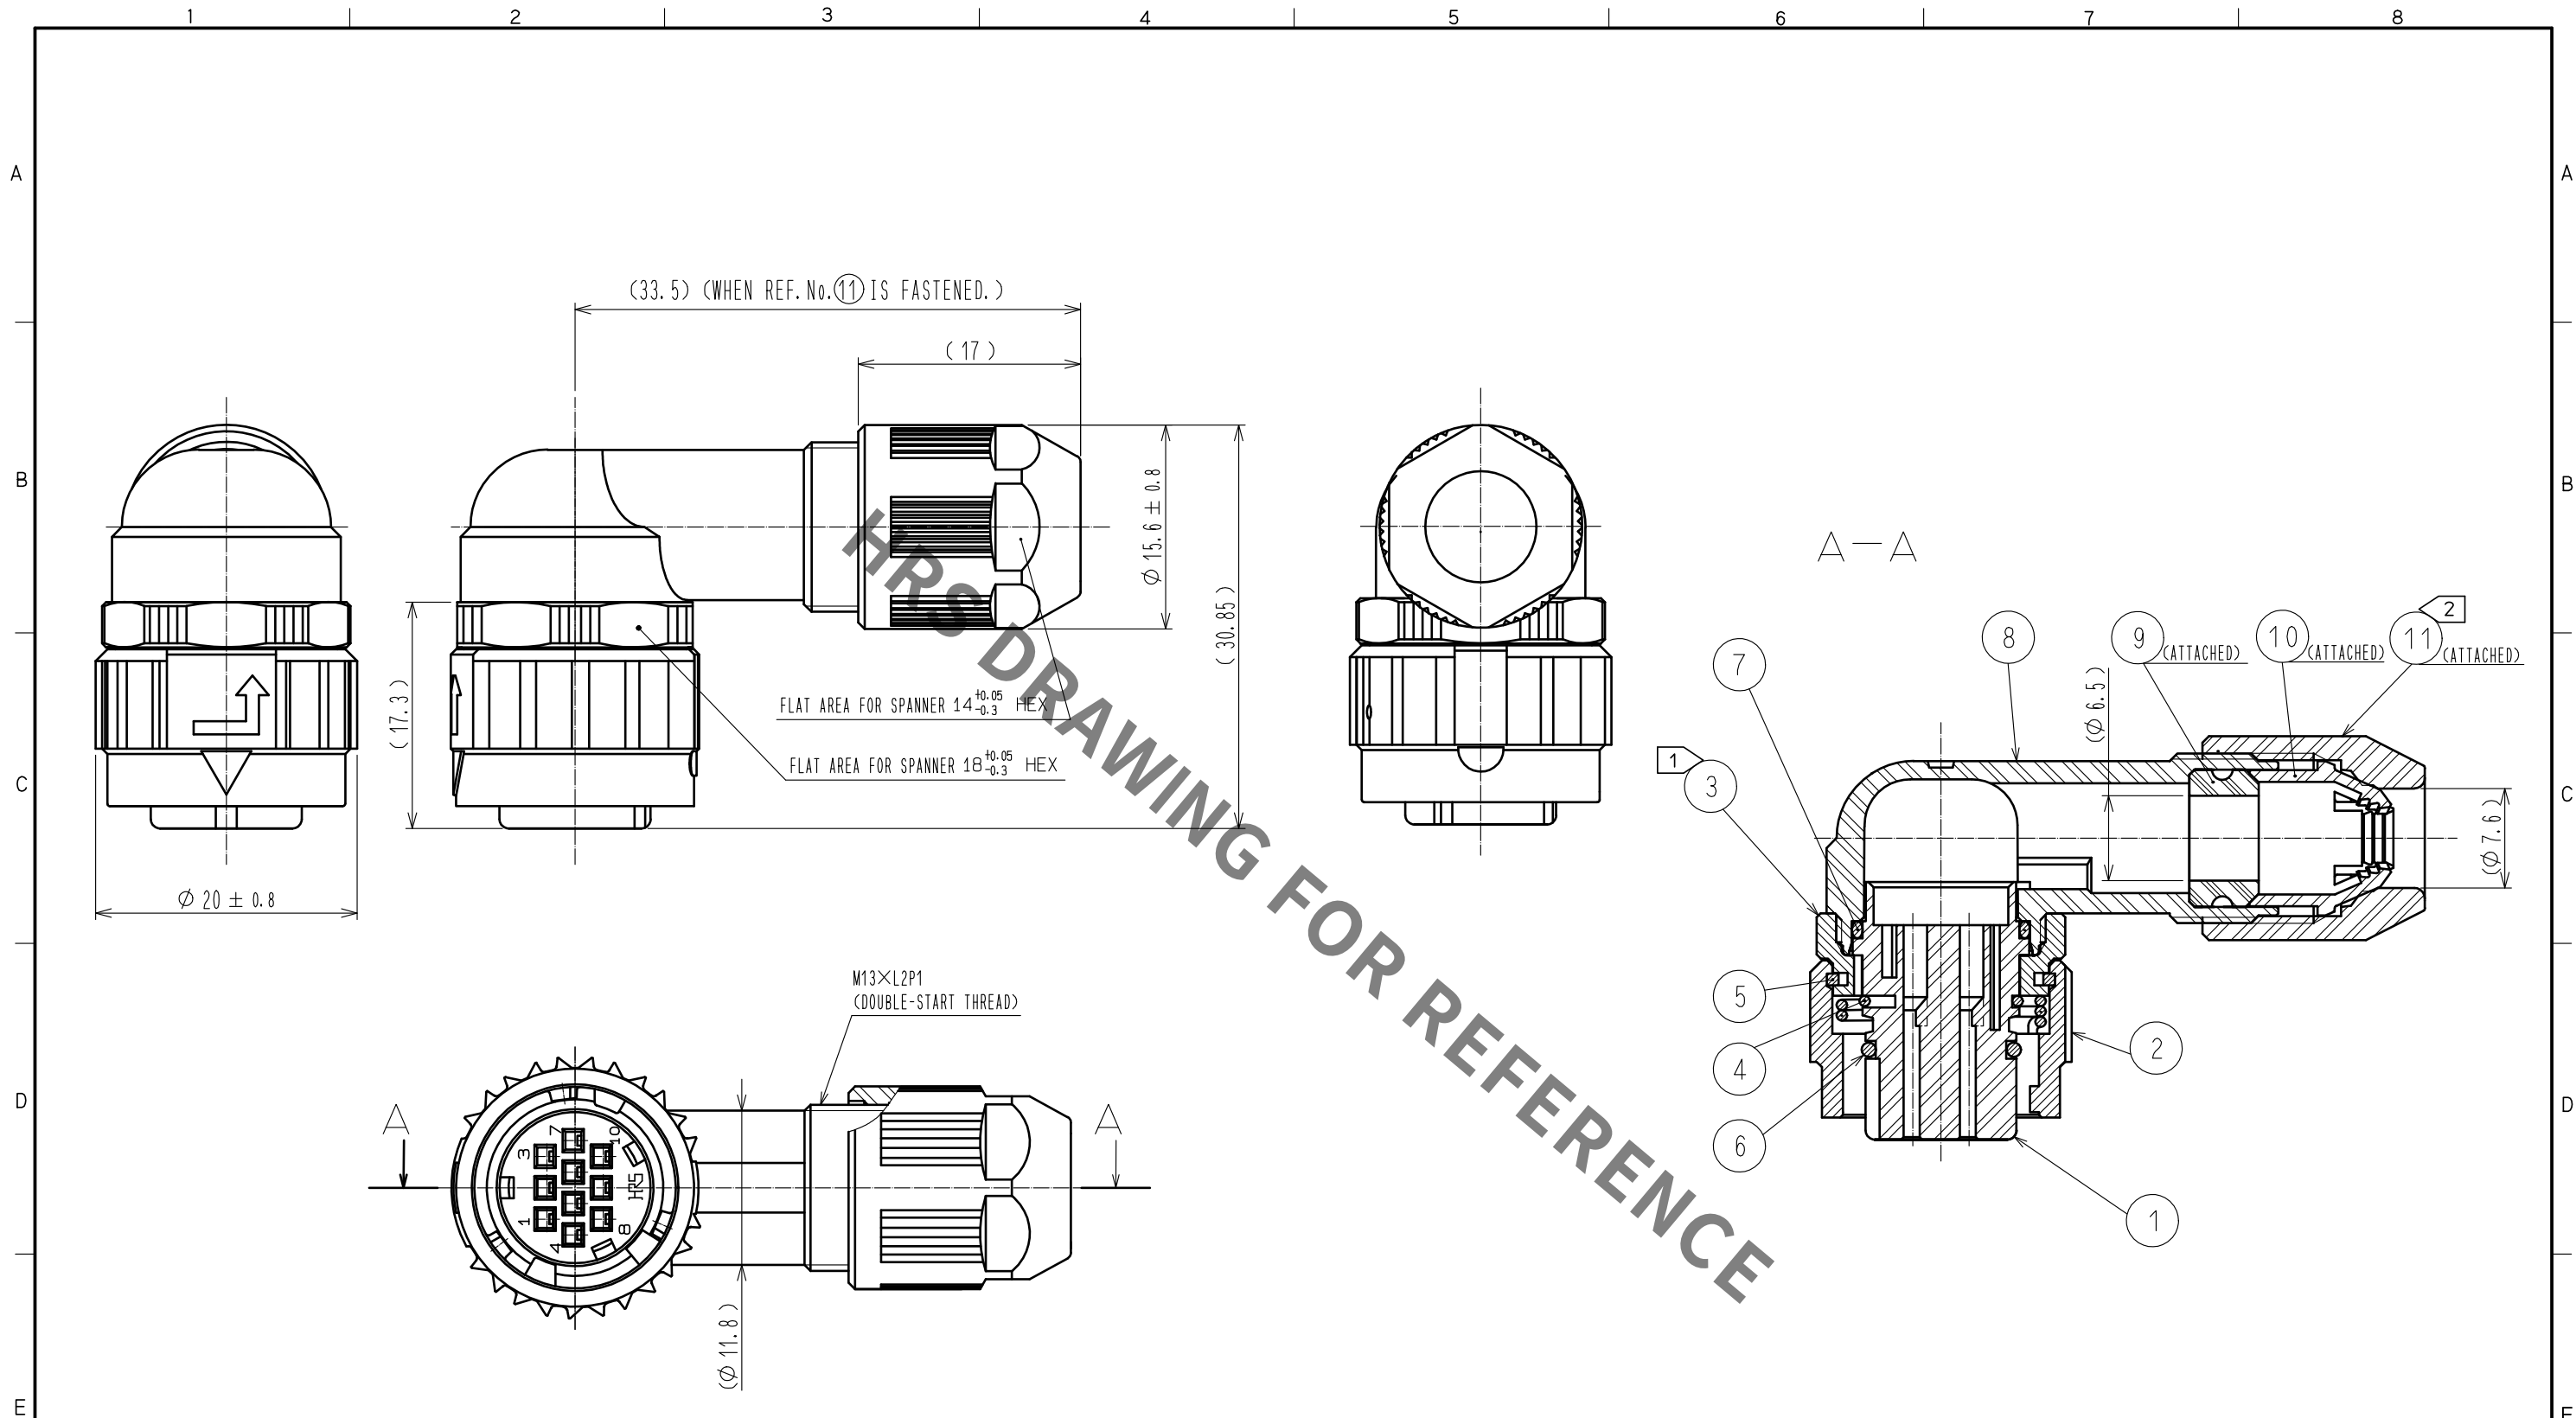

- NOTES
- 1 THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ③: 0.9 TO 1 N · m.
THE RECOMMENDED ADHESIVE OF REF. NO. ③: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
 - 2 THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑪: 0.9 TO 1 N · m.
THE RECOMMENDED ADHESIVE AND PRIMER OF REF. NO. ⑪: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
 - 3 ROTATION EXAMPLE ARE SHOWN FOR REF. NO. ①, ③, ⑧, AND ⑪.
 - 4 APPLICABLE CRIMP CONTACT: HR34B-SC1-211 (CL134-0050-4)
APPLICABLE WIRE: AWG#20 TO AWG#24 (COVERED WIRE MAX. OUTSIDE DIA. $\phi 1.7$)
APPLICABLE CONTACT REMOVAL TOOL (EXTRACTION TOOL): RP6-SC-TP (CL150-0039-0)
 - 5 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFER, DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.

6	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)			
5	PHOSPHOR BRONZE	NICKEL PLATING	11	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0
4	STAINLESS STEEL		10	POLYAMIDE	(WHITE) UL94V-0
3	ZINC ALLOY	NICKEL PLATING	9	HYDROGENATION ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
2	ZINC ALLOY	NICKEL PLATING	8	POLYAMIDE	(BLACK) UL94V-0
1	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	7	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
		APPROVED	HY. KOBAYASHI	18.02.26	DRAWING NO. EDC-117754-31-00
		CHECKED	HY. KOBAYASHI	18.02.26	PART NO. HR08D-12WLP-10SC(31)
		DESIGNED	DS. MATSUNE	18.02.24	CODE NO. CL108-0270-4-31
		DRAWN	AI. NISHIYAMA	18.02.16	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR08D-12WLPM-10SC\(31\)](#)