


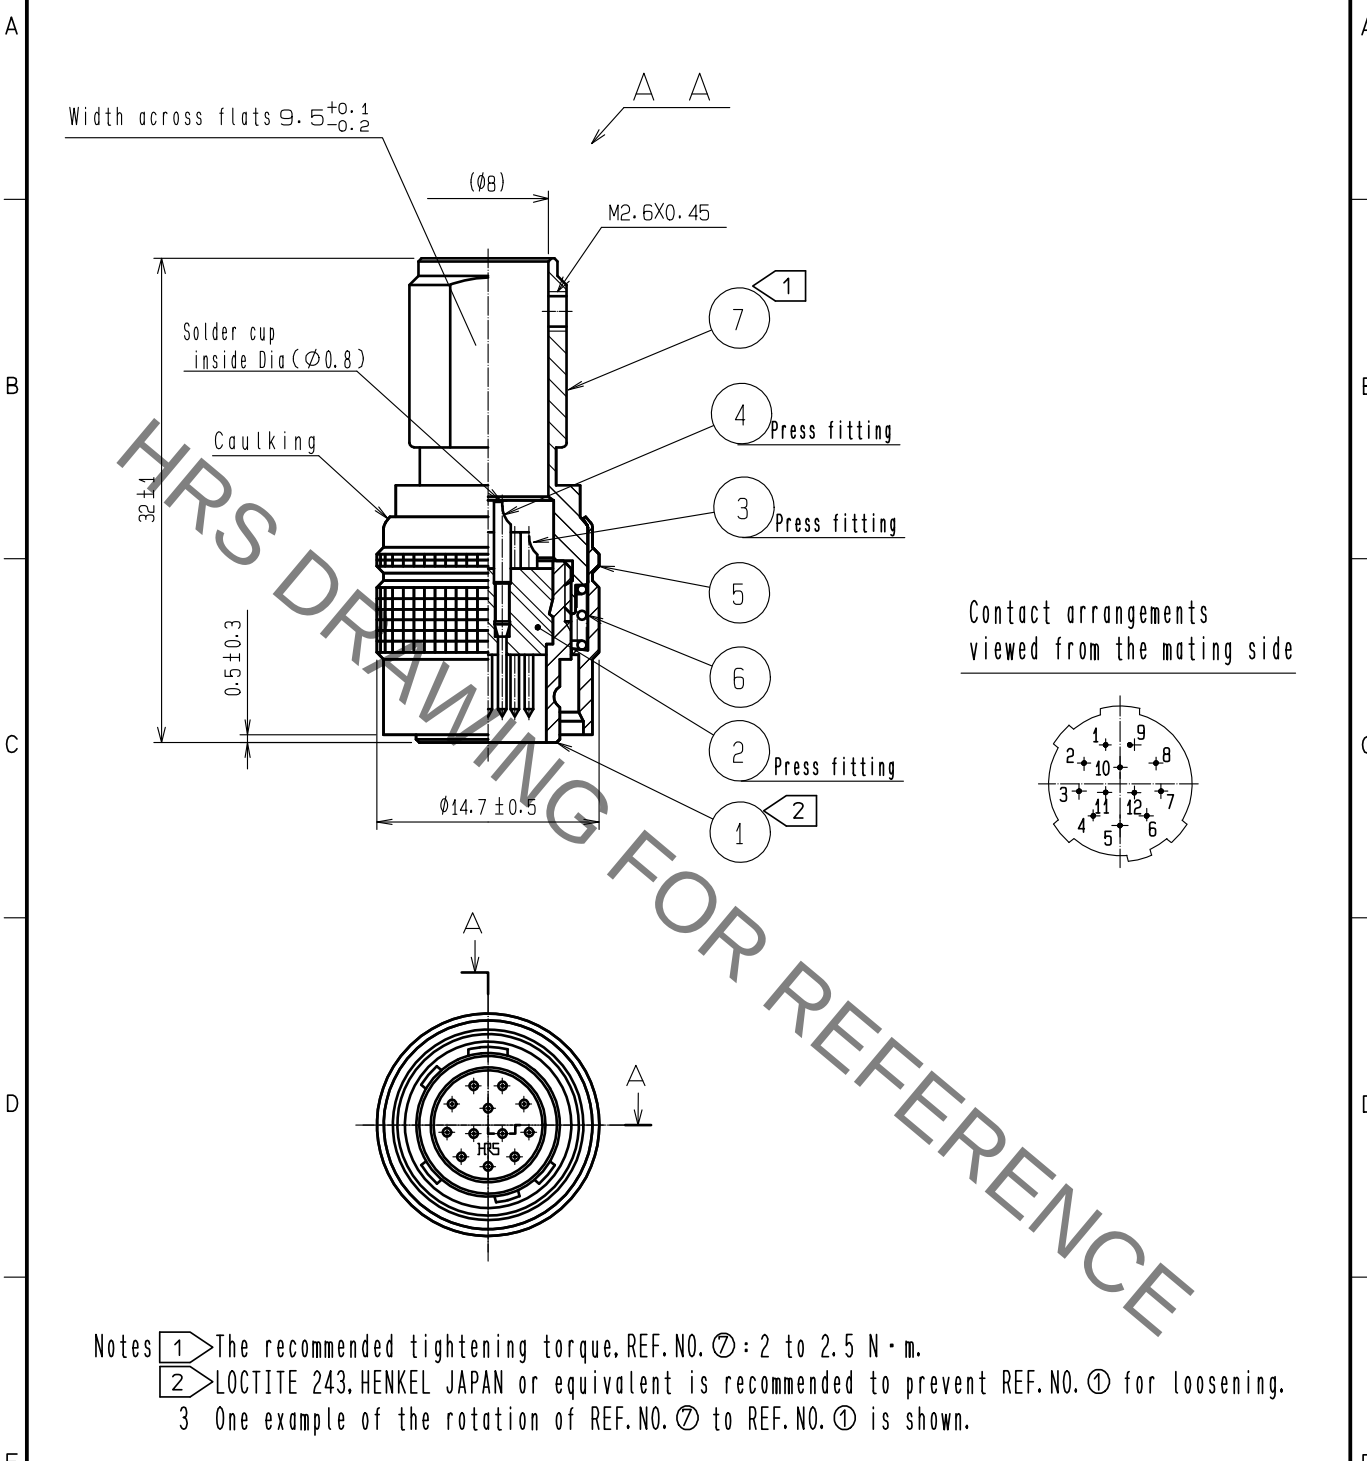

Notes

- 1 The recommended tightening torque, REF. NO. ⑦: 2 to 2.5 N · m.
- 2 LOCTITE 243, HENKEL JAPAN or equivalent is recommended to prevent REF. NO. ① for loosening.
- 3 One example of the rotation of REF. NO. ⑦ to REF. NO. ① is shown.

[illegible]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR10A-10P-12P\(78\)](#)