
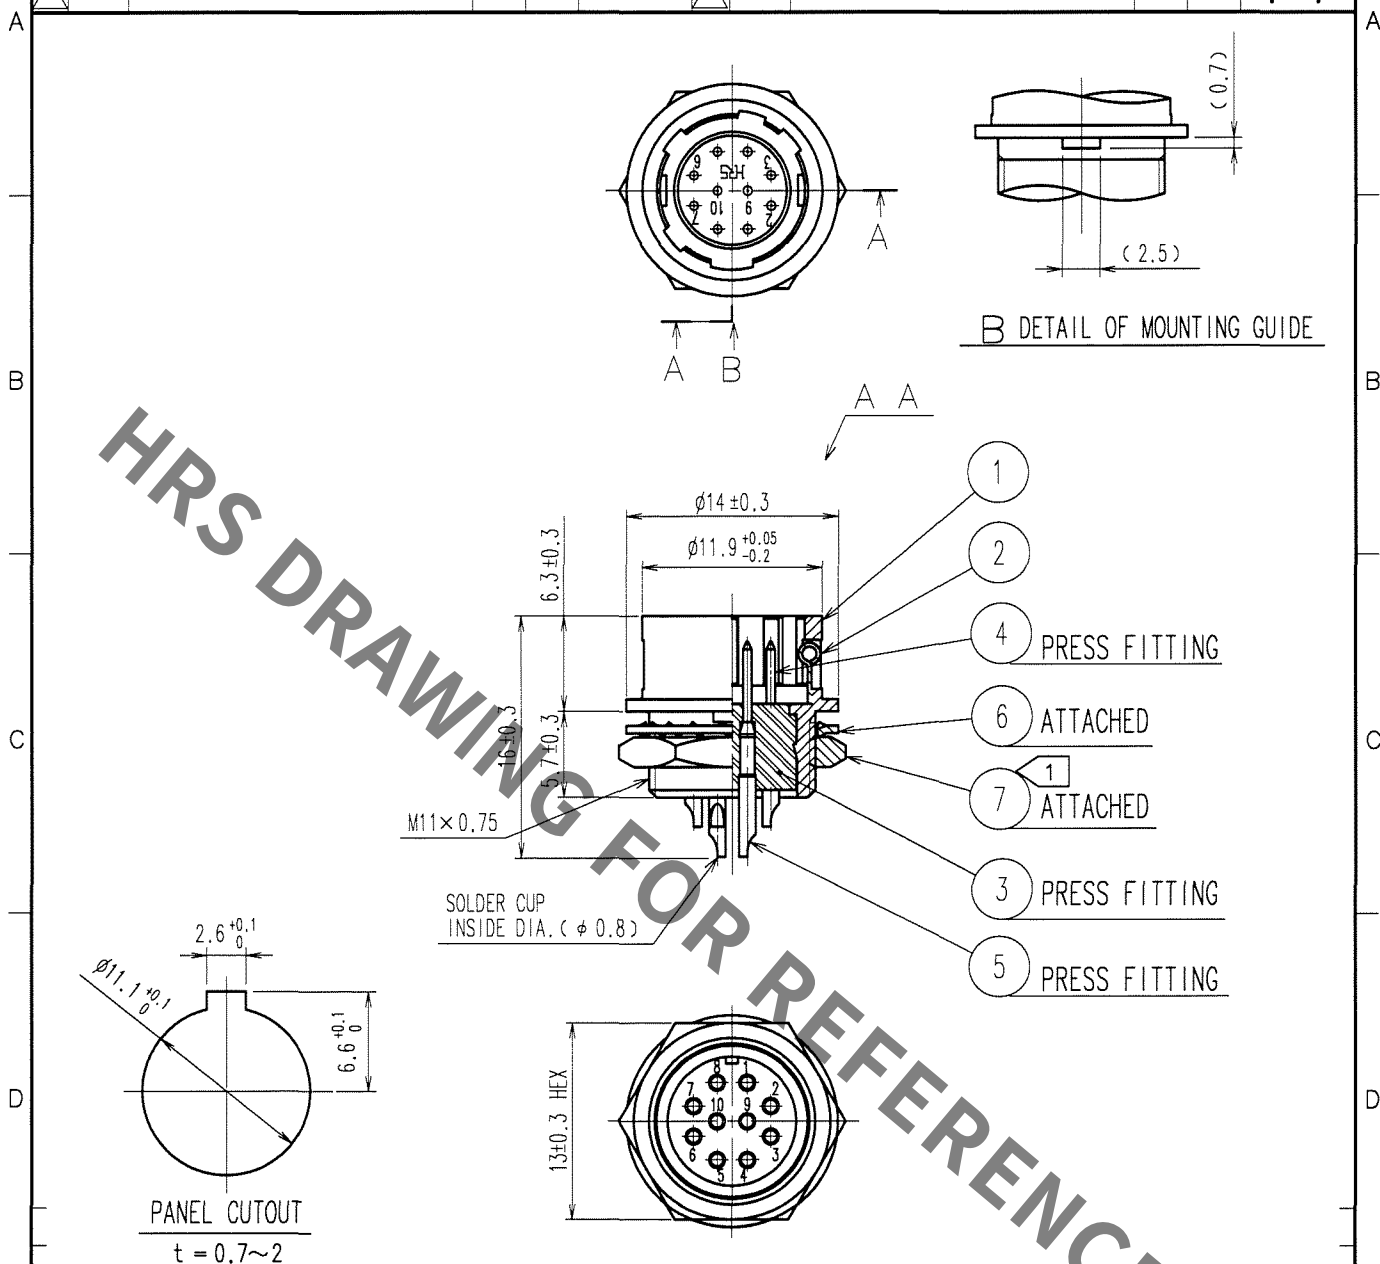


1					2			3			4		
	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		
▲	1	DIS-C-000585	T.K	E.K	07.07.27	▲					. .		
▲						▲					. .		
▲						▲					. .		



NOTE ① THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑦ TO BE 2 N·m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑦ FROM LOOSENING.

3	POLYAMIDE	(BLACK) UL94V-0	7	BRASS	NICKEL PLATING
2	STAINLESS STEEL		6	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	5	BRASS	OVER PLATING: GOLD 0.2μ m min. UNDER PLATING: 2μ m min.
			4	BRASS	

CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL		M.SATO	TO.HORII	E.KUNII	M.SATO	
		'07 03 07	'07 03 07	'07 03 08	'07 03 08	
		DRAWING NO.		PART NO.		
SCALE		EDC4-021369-74		HR10A-10R-10P(74)		
2 : 1						
UNITS		CODE NO.		1/1		
mm		CL110-0410-8-74		1/1		
		HIROSE ELECTRIC CO.,LTD.				

TO
R

	SCALE
2 : 1	
UNITS	mm

HRS

HIROSE ELECTRIC CO., LTD.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HR10A-10R-10P\(74\)](#)